

LTCC Coupler

50Ω 2400 to 2500 MHz 28dB Coupling

CPJC-28-252R+



Generic photo used for illustration purposes only
CASE STYLE: JC0603C

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature*	-55°C to 100°C

*Refer to product storage temperature after installation.
Suggestion for T&R unused product storage condition: +5--+35°C, Humidity 45-75%RH, 12 Month max.
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

Input	1
GND	2
Coupled Out	3
Termination	4
GND	5
Main Out	6

Outline Drawing

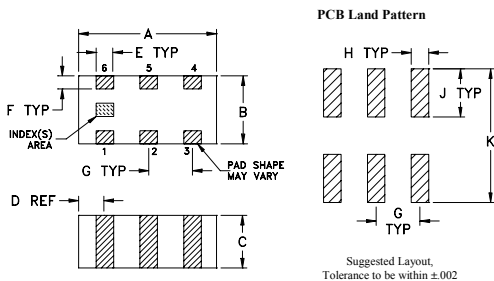

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15
G	H	J	K	wt	
.020	.010	.022	.053	grams	
0.51	0.25	0.56	1.35	0.005	

Features

- miniature size 0603 (0.063"[1.6mm]) x 0.031"[0.8mm] x 0.024"[0.6mm])
- low cost
- aqueous washable

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2400		2500	MHz
Mainline Loss	2400 - 2500	—	0.3	0.4	dB
Coupling	2400 - 2500	—	28±2.0	—	dB
Directivity	2400 - 2500	6.5	10	—	dB
Return Loss (Input)	2400 - 2500	—	32	—	dB
Return Loss (Output)	2400 - 2500	—	39	—	dB
Input Power	2400 - 2500	—	—	2	W

1. Derate linearly to 1W at 100°C

Typical Performance Data

Frequency (GHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
2.40	0.26	26.41	11.35	30.38	47.41	2.04
2.41	0.26	26.42	11.28	30.27	45.13	2.02
2.42	0.26	26.43	11.18	30.18	43.31	2.01
2.43	0.26	26.42	11.10	29.98	41.62	2.00
2.44	0.26	26.43	11.02	29.88	40.12	1.99
2.45	0.26	26.43	10.95	29.74	38.82	1.98
2.46	0.27	26.43	10.86	29.53	37.61	1.97
2.47	0.27	26.44	10.77	29.37	36.60	1.96
2.48	0.27	26.44	10.70	29.16	35.59	1.95
2.49	0.27	26.44	10.61	28.94	34.70	1.94
2.50	0.27	26.45	10.53	28.69	33.92	1.93

Evaluation Board MCL P/N: TB-CPJC28-252R+ Suggested PCB Layout (PL-440)



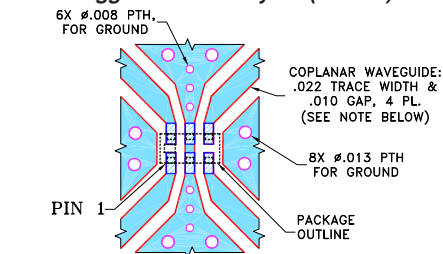


- NOTES:
1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

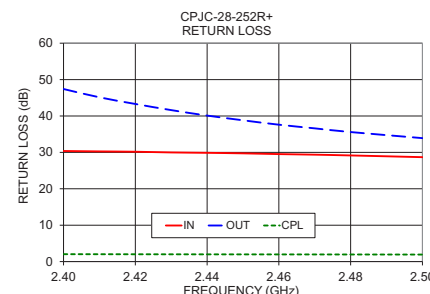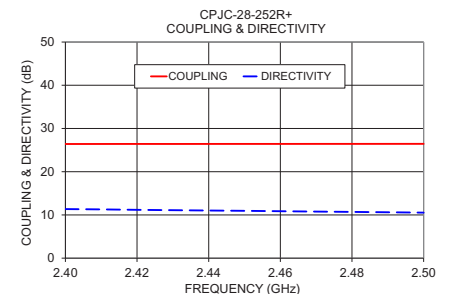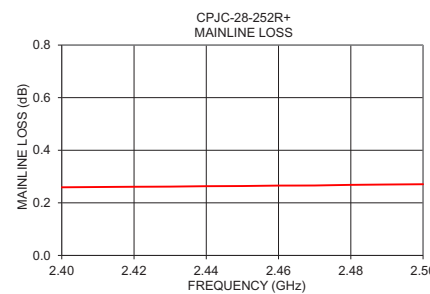

Electrical Schematic

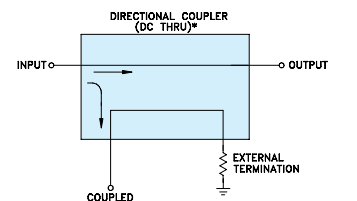

* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-005220
CPJC-28-252R+
SL/CP/AM
201203
Page 1 of 1