



## MMIC SURFACE MOUNT


# X3 Frequency Multiplier

# CY3-453+

50Ω Output 20 to 45 GHz

### THE BIG DEAL

- Wideband Output From: 20 to 45 GHz
- Outstanding Fundamental and Close-in Harmonic Suppression:
  - F1: 39 dBc Typ.
  - F2: 46 dBc Typ.
  - F4: 40 dBc Typ.
- Input Drive Level: +12 to +17 dBm
- Conversion Loss: 20 dB Typ.
- Tiny Size, 4x4mm 24-Lead, QFN-Style




Generic photo used for illustration purposes only

### APPLICATIONS

- 5G MIMO and Back Haul Radio Systems
- Satellite Communications
- Test and Measurement Equipment
- Radar, EW, and ECM Defense Systems

### FUNCTIONAL DIAGRAM

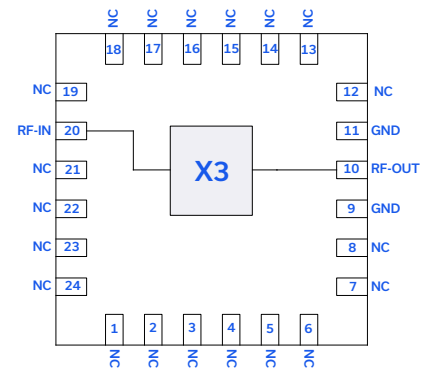

### PRODUCT OVERVIEW

Mini-Circuits' CY3-453+ is a wideband MMIC Frequency Tripler, converting input frequencies from 6.66 to 15 GHz into output frequencies from 20 to 45 GHz. Its wide output range makes this model suitable for broadband systems as well as a wide variety of narrow-band applications. Utilizing GaAs HBT technology, the CY3-453+ comes housed in a 4x4mm 24-Lead QFN-Style package and offers excellent repeatability, low inductance, and good thermal efficiency.

### KEY FEATURES

Features	Advantages
Broadband, 20 to 45 GHz output	With an output frequency range spanning 20 to 45 GHz, this multiplier supports broadband applications.
Excellent Fundamental and Harmonic Suppression <ul style="list-style-type: none"> <li>• F1, 39 dBc Typ.</li> <li>• F2, 46 dBc Typ.</li> <li>• F4, 40 dBc Typ.</li> </ul>	Harmonic and fundamental filtering requirements are dramatically simplified due to the high suppression resulting from internal cancellation within the diode configuration.
Wide input power range +12 to +17 dBm	Wide input power signal range accommodates different input signal levels while still maintain a low conversion loss.



MMIC SURFACE MOUNT

# X3 Frequency Multiplier

## CY3-453+

Mini-Circuits

50Ω Output 20 to 45 GHz

### ELECTRICAL SPECIFICATIONS<sup>1,3</sup> AT +25°C AND Z<sub>0</sub> = 50Ω, UNLESS NOTED OTHERWISE

Parameter		Input Frequency (GHz)	Min.	Typ.	Max.	Unit
Multiplication Factor			3			
Frequency Range, Input (F1)			6.66		15	GHz
Frequency Range, Output (F3)			20		45	GHz
Input Power			+12	+16	+17	dBm
Conversion Loss (F3)		6.66-8		20.1	22.0	dB
		8-10		19.8	21.6	
		10-12		19.4	21.4	
		12-15		21.0	23.7	
Harmonic Output <sup>2,3</sup>	F1	6.66-8		40		dBc
		8-10		43		
		10-12		45		
		12-15		27		
	F2	6.66-8		58		dBc
		8-10		42		
		10-12		49		
		12-15		38		
	F4	6.66-8		30		dBc
		8-10		47		
		10-12		41		
		12-15		43		






1. Measured on Mini-Circuits Characterization Test Board TB-CY3-453C+.

2. Harmonics of input frequency below power of F3.

3. All specifications are measured with RF input power = +16 dBm.




### TYPICAL PERFORMANCE GRAPHS

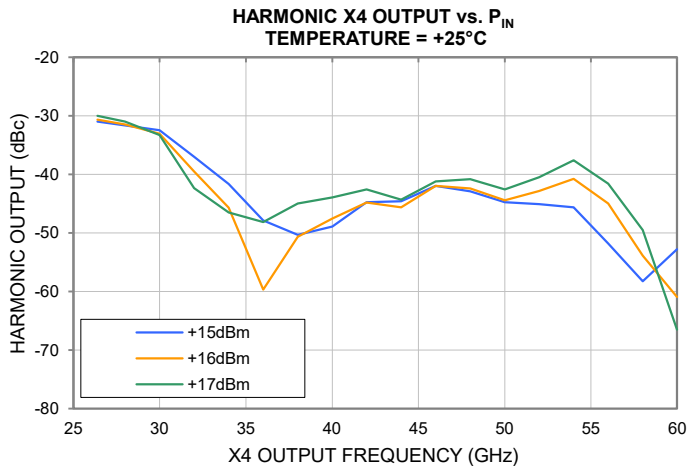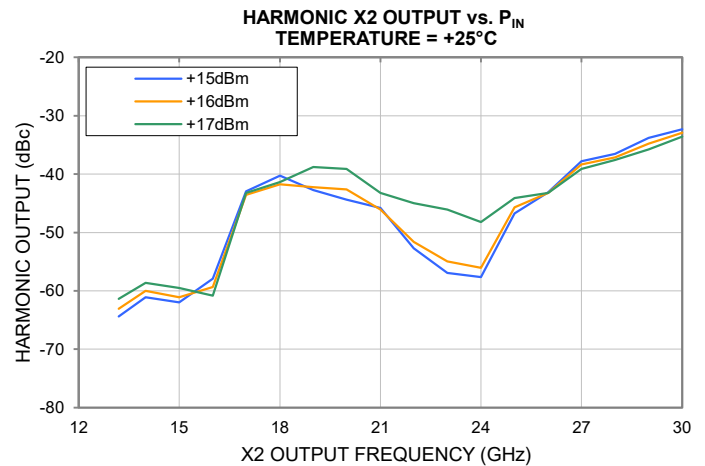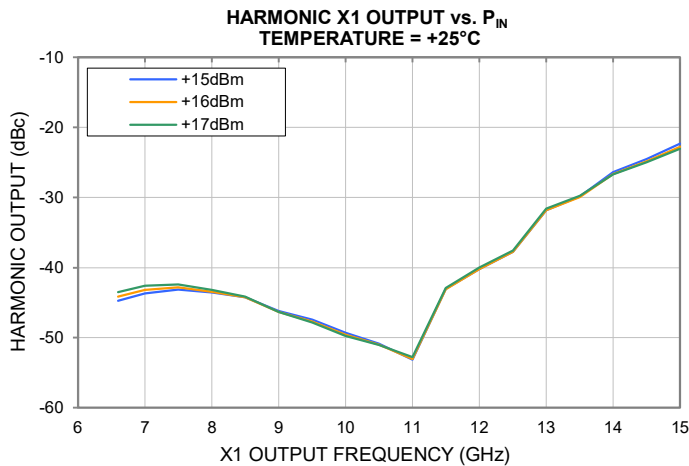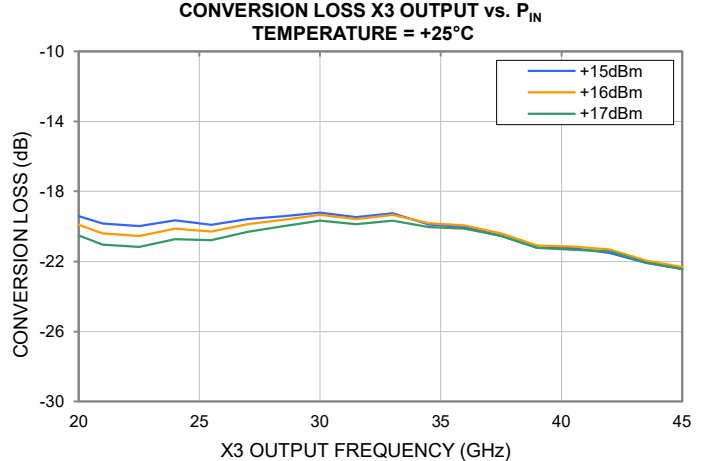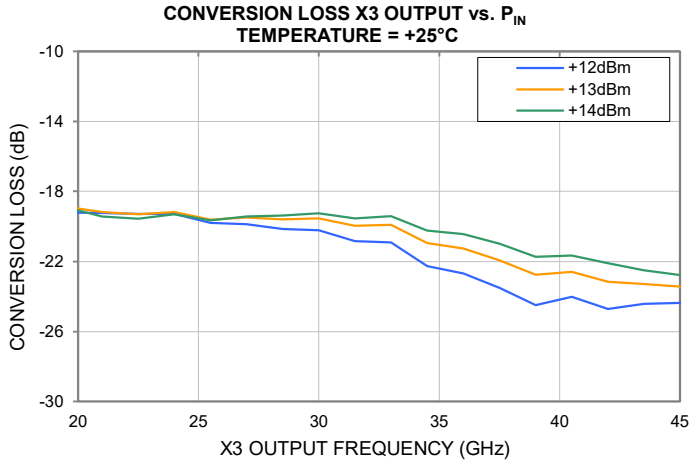




### TYPICAL PERFORMANCE GRAPHS


CONVERSION LOSS X3 OUTPUT vs. TEMPERATURE  
RF IN = +15dBm

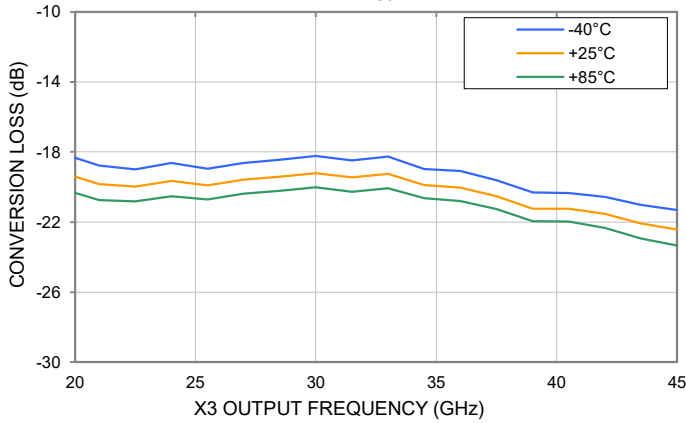


HARMONIC X1 OUTPUT vs. TEMPERATURE  
RF IN = +15dBm

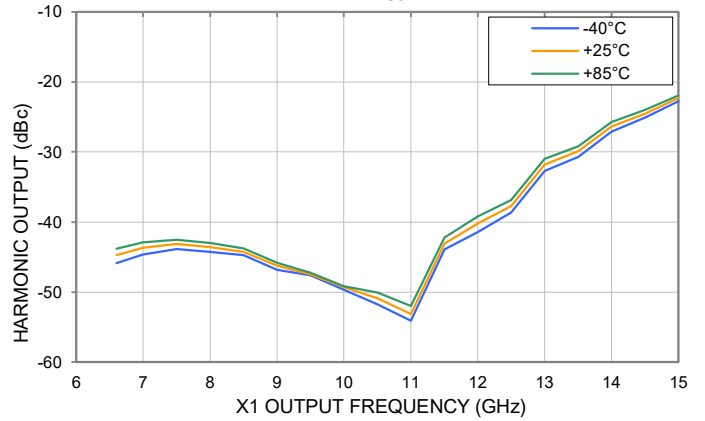

HARMONIC X2 OUTPUT vs. TEMPERATURE  
RF IN = +15dBm

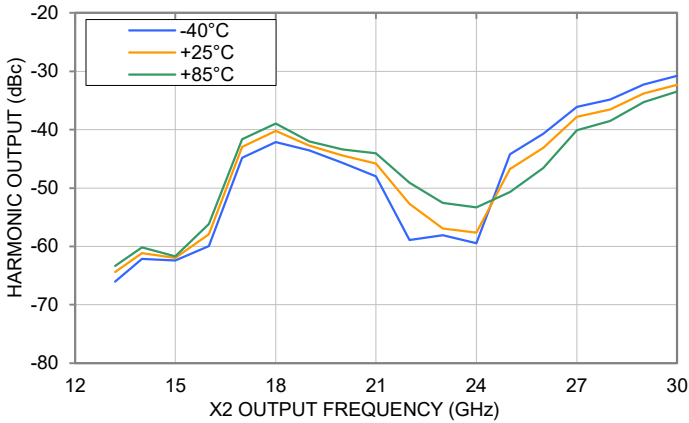


HARMONIC X4 OUTPUT vs. TEMPERATURE  
RF IN = +15dBm

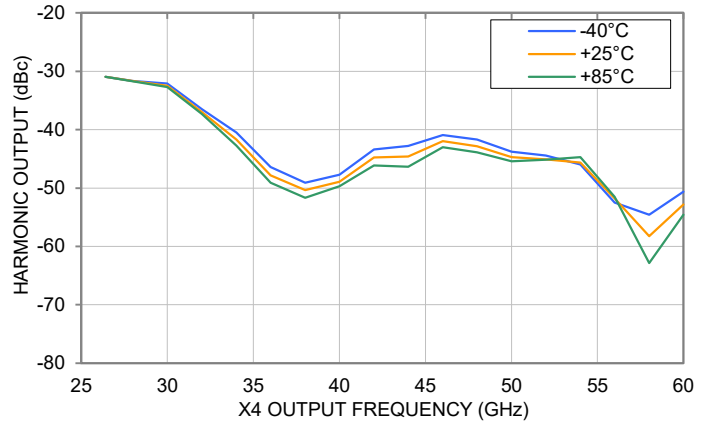




### TYPICAL PERFORMANCE GRAPHS


CONVERSION LOSS X3 OUTPUT vs. TEMPERATURE  
RF IN = +16dBm

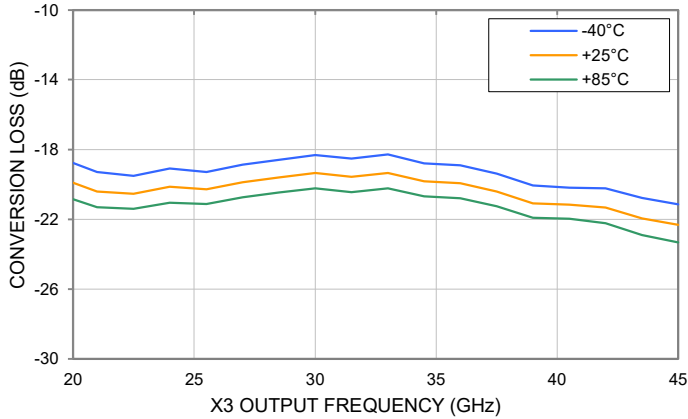


HARMONIC X1 OUTPUT vs. TEMPERATURE  
RF IN = +16dBm

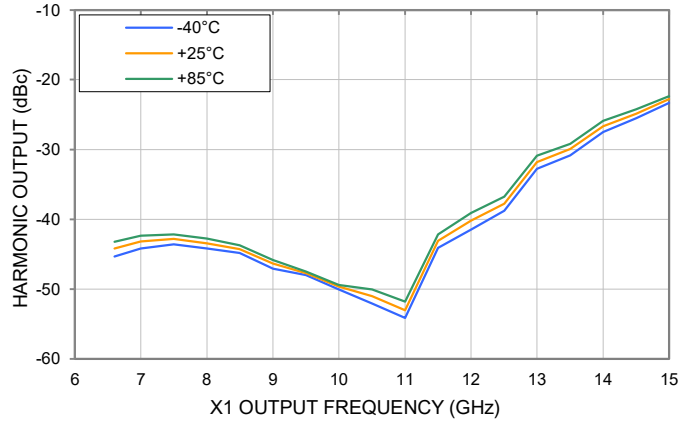

HARMONIC X2 OUTPUT vs. TEMPERATURE  
RF IN = +16dBm

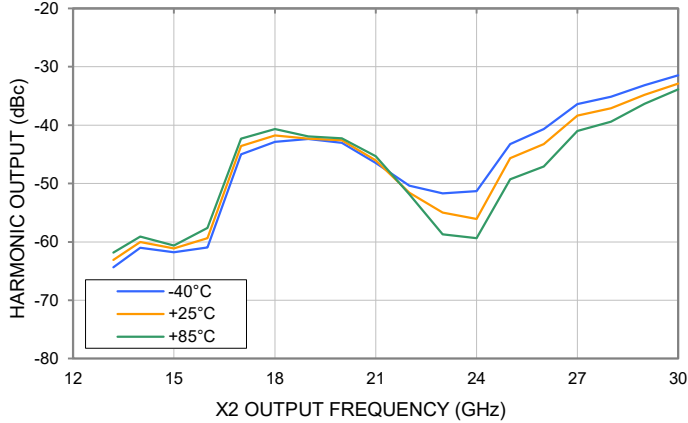


HARMONIC X4 OUTPUT vs. TEMPERATURE  
RF IN = +16dBm

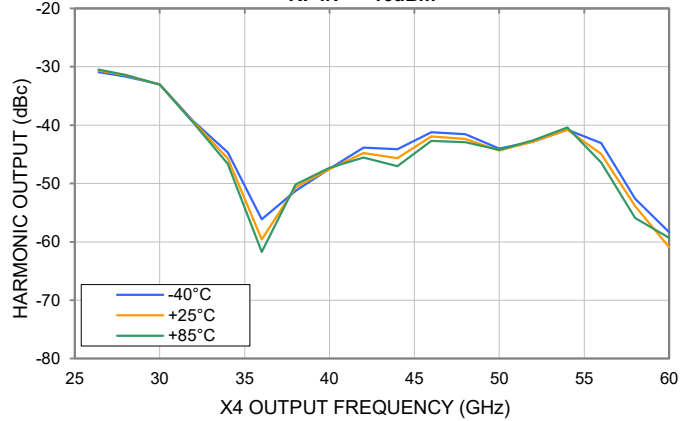




### TYPICAL PERFORMANCE GRAPHS


CONVERSION LOSS X3 OUTPUT vs. TEMPERATURE  
RF IN = +17dBm

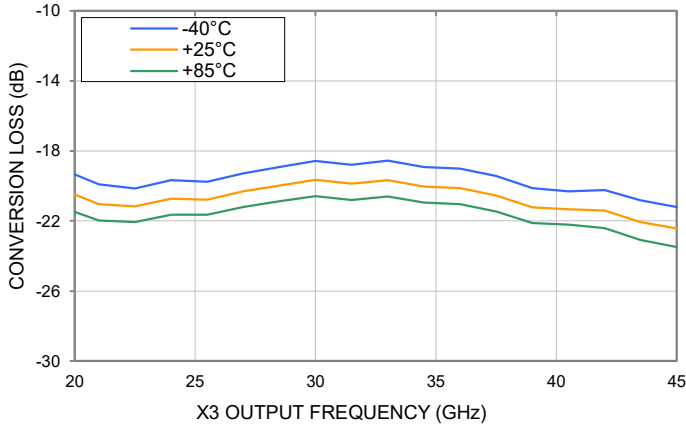


HARMONIC X1 OUTPUT vs. TEMPERATURE  
RF IN = +17dBm

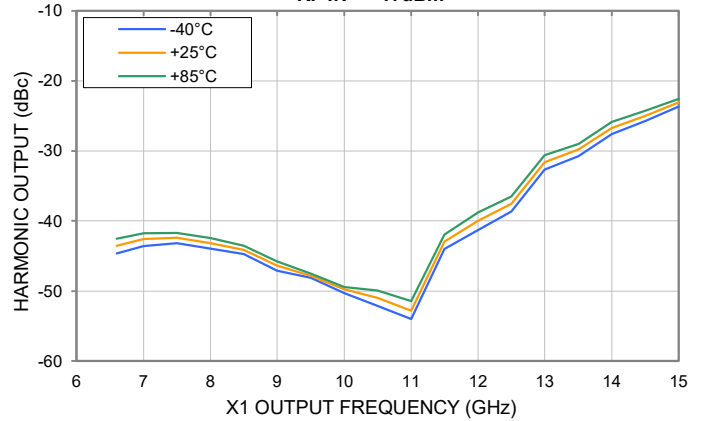

HARMONIC X2 OUTPUT vs. TEMPERATURE  
RF IN = +17dBm

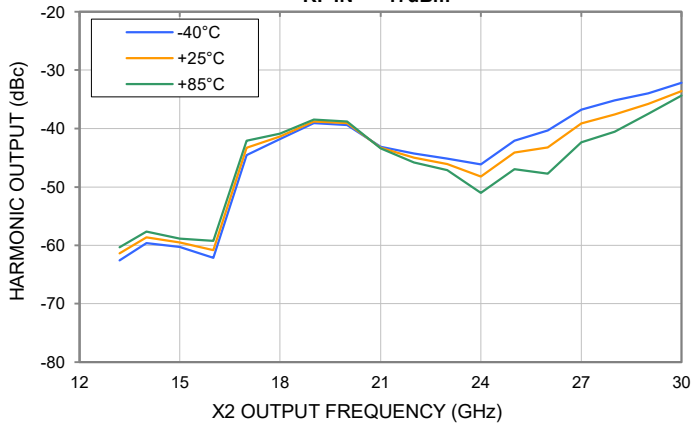

HARMONIC X4 OUTPUT vs. TEMPERATURE  
RF IN = +17dBm

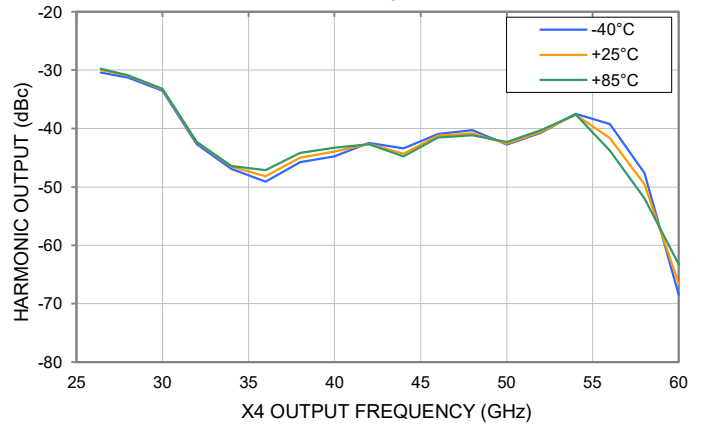



### ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to +85°C
Storage Temperature	-65°C to +150°C
RF Input Power	+26 dBm (5 minute max) +23 dBm (Continuous)

5. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are not intended for continuous normal operation.

### ESD RATING

	Class	Voltage Range	Reference Standard
HBM	1B	500V to < 1000V	ANSI/ESDA/JEDEC JS-001-2017
CDM	C2	500V to < 1000V	JESD22-C101F




ESD HANDLING PRECAUTION: This device is designed to be Class 1B for HBM. Static charges may easily produce potentials higher than this with improper handling and can discharge into DUT and damage it. As a preventive measure Industry standard ESD handling precautions should be used at all times to protect the device from ESD damage.

### MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020E/JEDEC J-STD-033C



### FUNCTIONAL DIAGRAM

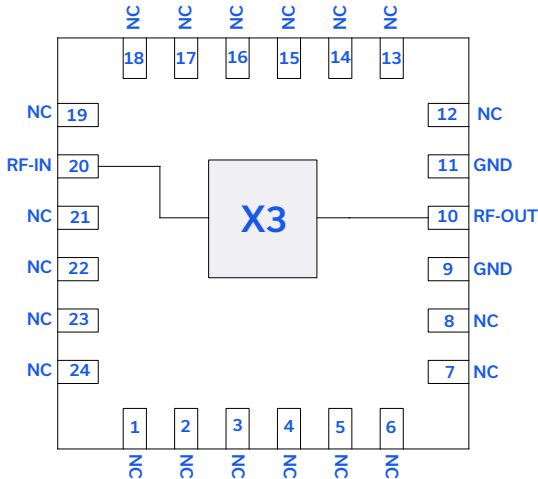

### PAD DESCRIPTION

Function	Pad Number	Description (Refer to Fig 1)
RF-IN	20	RF-IN Pad connects to RF Input Port
RF-OUT	10	RF-OUT Pad connects to RF Output Port
GND	9, 11, & Paddle	Connects to ground
NC	1-8, 12-19, 21-24	Not used internally. Connected to ground on test board

Figure 1. CY3-453+ Functional Diagram

### APPLICATION AND CHARACTERIZATION SETUP

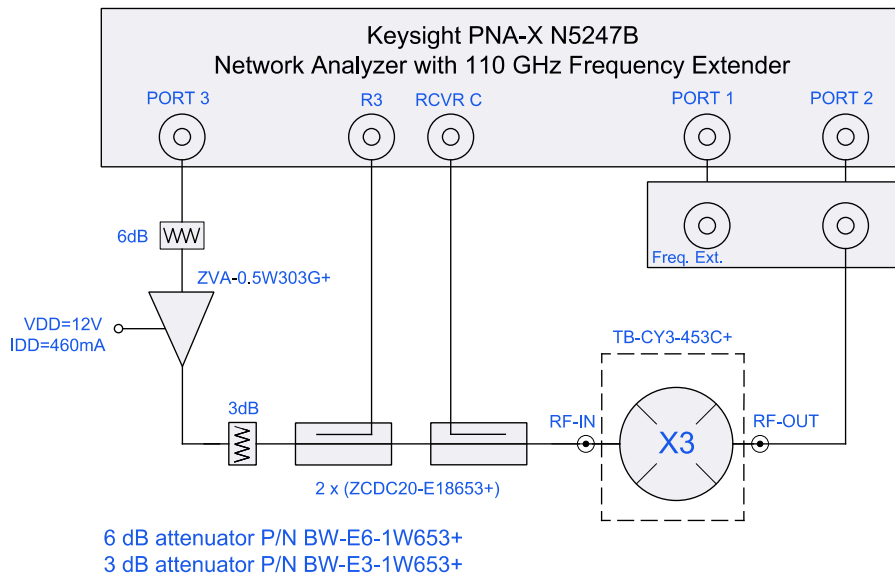


Figure 2. Application and Characterization Setup for CY3-453+

Conversion Loss and F1, F2, F4 Harmonic Rejection are measured using N5245A PNA-X microwave network analyzer.


Condition:

1. Conversion Loss and Harmonic Rejection:  $P_{IN} = +16$  dBm






### CASE STYLE DRAWING

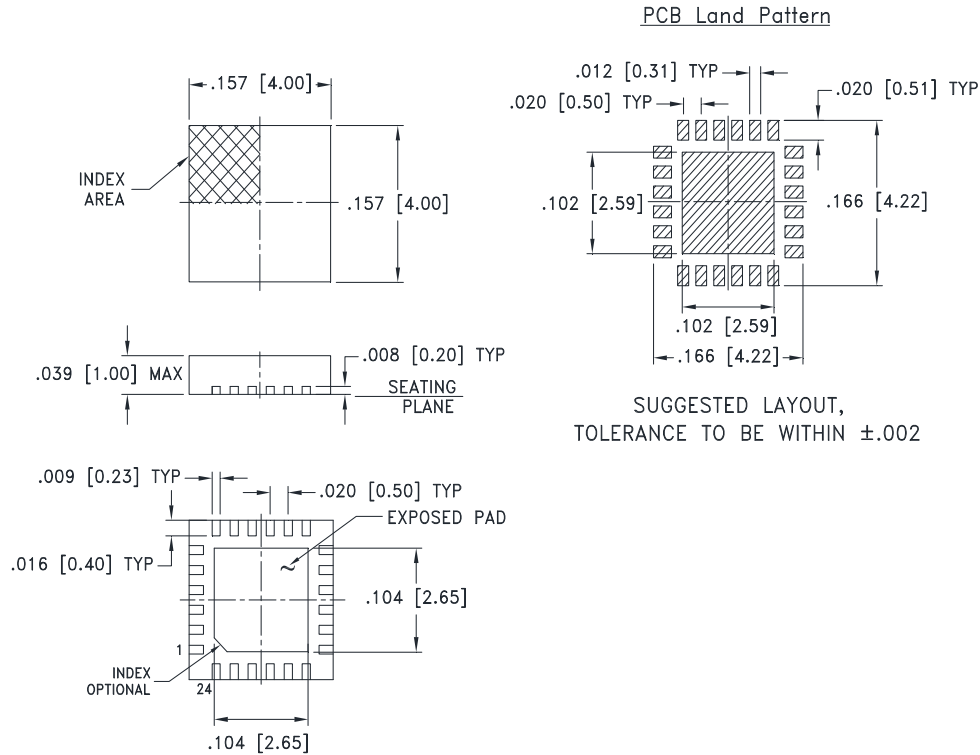

PCB Land Pattern

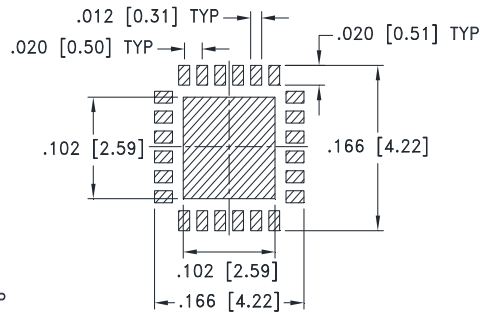

SUGGESTED LAYOUT, TOLERANCE TO BE WITHIN ±.002

Weight: .04 Grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

### PRODUCT MARKING



Marking may contain other features or characters for internal lot control



MMIC SURFACE MOUNT

# X3 Frequency Multiplier

## CY3-453+

50Ω Output 20 to 45 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD

[CLICK HERE](#)

Performance Data	Data Table Swept Graphs
Case Style	DG1847. Plastic package, exposed paddle, Lead Finish: Matte-Tin
RoHs Status	Compliant
Tape & Reel Standard quantities available on reel	F68 7" reels with 20, 50, 100, 200, 500, 1K or 2K devices
Suggested Layout for PCB Design	PL-732
Evaluation Board	TB-CY3-453C+
Environmental Ratings	ENV08T1

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

