



Mini-Circuits®

SURFACE MOUNT


Directional Coupler

DBTC-7-152+

50Ω 7 dB 10 to 1500 MHz

FEATURES

- Very Flat Coupling
- Very Broadband, Multi Octave
- Temperature Stable, LTCC Base
- All Welded Construction
- Leads Attached for Better Solderability
- Micro Miniature Coupler
- Aqueous Washable
- Protected by US Patents 6,140,887 & 6,784,521



Generic photo used for illustration purposes only

CASE STYLE: AT790-1

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- VHF/UHF Transmitters
- Cellular

ELECTRICAL SPECIFICATIONS AT +25°C


Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		10		1500	MHz
Mainline Loss	10-100		2.2	2.7	dB
	100-750		2.2	2.6	
	750-1500		2.3	3.2	
Nominal Coupling	10-1500		7.0±0.5		dB
Coupling Flatness	10-1500			±0.5	dB
Directivity	10-100	20	32		dB
	100-750	15	29		
	750-1500	9	16		
VSWR	10-1500		1.4		:1
Input Power	10-100			0.5	W
	100-750			1.0	
	750-1500			1.0	

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

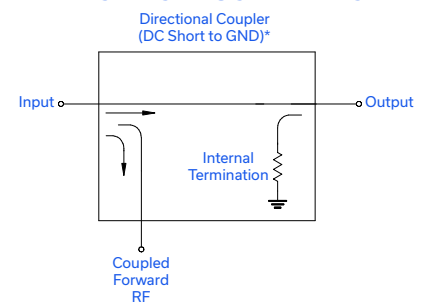

* Electrical schematic is for directional coupler with internal transformer(s) that routes DC from RF ports to ground.

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-027283
DBTC-7-152+
MCL NY
251009
PAGE 1 OF 3



Mini-Circuits

SURFACE MOUNT

Directional Coupler


DBTC-7-152+

50Ω 7 dB 10 to 1500 MHz


PIN CONNECTIONS

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
ISOLATE (DO NOT USE)	6


OUTLINE DRAWING

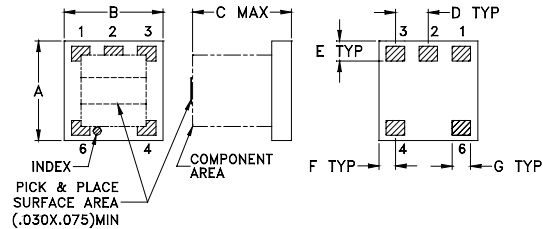

PCB Land Pattern



PRODUCT MARKING: N/A

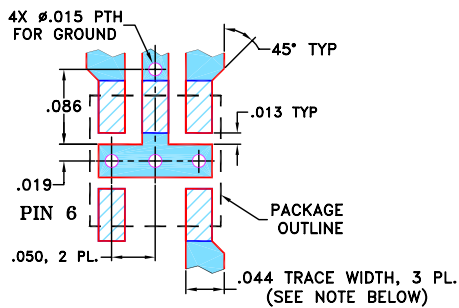DEMO BOARD MCL P/N: TB-DBTC-7-152+
SUGGESTED PCB LAYOUT (PL-150)

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DIMENSIONS (Inches
mm)

A	B	C	D	E	F	G	H	J	K	wt
.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	grams
3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	0.10

TAPE & REEL INFORMATION: F17



Mini-Circuits®

SURFACE MOUNT




Directional Coupler

DBTC-7-152+

50Ω 7 dB 10 to 1500 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out			In	Out	Cpl
5	2.17	7.07	27.17	12.45	21.18	21.33
50	2.12	6.92	33.24	13.24	21.93	26.08
150	2.15	6.97	32.95	13.44	21.26	25.04
300	2.17	6.98	29.37	13.82	19.97	23.43
500	2.16	6.91	24.56	14.71	18.49	22.88
700	2.18	6.84	20.96	15.84	17.26	24.92
1000	2.24	6.72	17.31	18.52	15.82	46.44
1200	2.33	6.69	15.48	21.27	15.02	24.76
1400	2.47	6.72	13.83	25.55	14.19	18.44
1500	2.57	6.76	13.09	28.03	13.74	16.40

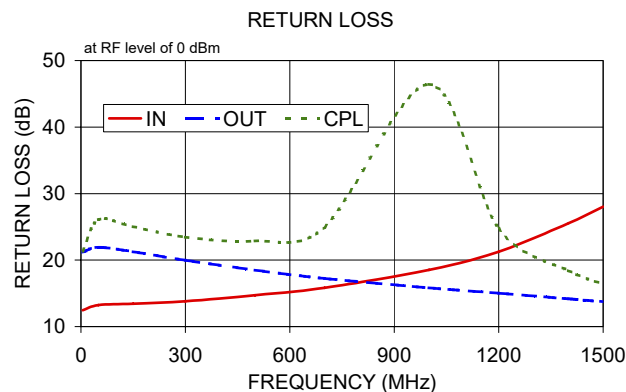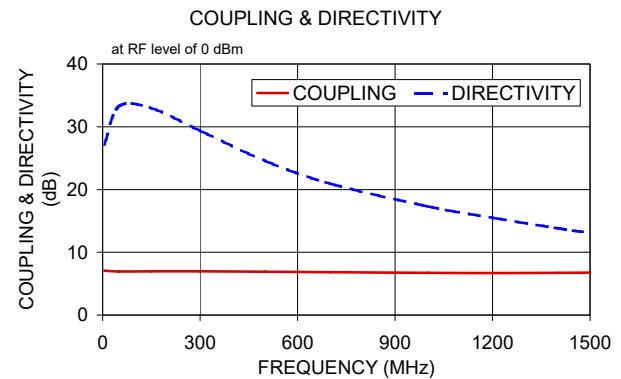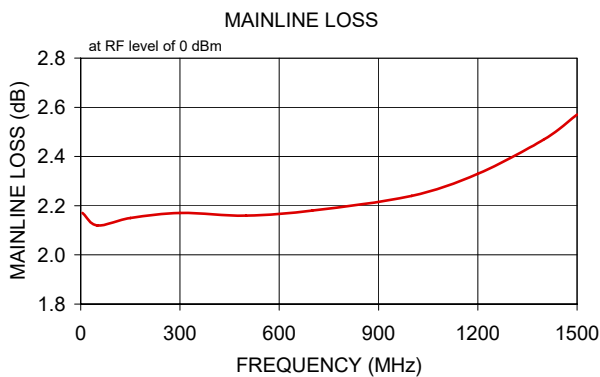

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

