Plug-in **Diplexer**

75O 5 to 1220 MHz (5-65, 85-1220 MHz)

The Big Deal

- Plug-in design
- Field replaceable
- Low insertion loss
- Excellent return loss, 24 dB typ.
- High cross over isolation
- Low group delay variation in passband
- DOCSIS 3.1 standard

Product Overview

DPLC-6585A0M+ is a high performance field replaceable plug-in diplexer with the lowpass port at 5-65 MHz and highpass port at 85-1220 MHz. Excellent return loss combined with high out of channel rejection makes it an ideal part in cable TV and multiband radio systems

Key Features

Feature	Advantages
Low passband insertion loss	Ensures low signal loss through both the channels.
Excellent Stopband rejection	Co-channel rejection of 50dB typical ensures unwanted spurious are eliminated.
Excellent return loss at 5-65 and 85-1220 MHz	This makes signal transmission with very less reflection and well-matched with the adjacent component used in the system.

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



DPLC-6585A0M+

Generic photo used for illustration purposes only CASE STYLE: QC2228



Notes

Plug-in Diplexer

5 to 1220 MHz (5-65, 85-1220 MHz) 75Ω


Maximum Ratings

Operating Temperature	-40° to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	30 dBm Max.
Permanent damage may occur if any of	

Pin Connections

HIGH PASS PORT	1
LOW PASS PORT	7
COMMON PORT	4
GROUND	2,3,5,6,8,9

Outline Drawing




Ν Р Q R s М L **.143 .559 .974 .417 .415** 3.63 14.21 24.74 10.58 10.53 .684 .546 1.111 17.37 13.87 28.22

3.35 21.10

Wt.

grams

Note: Please refer to case style drawing for details Demo Board MCL P/N: TB-929+ Suggested PCB Layout (PL-495)



NOTES:

31.56 28.36 16.00 12.07 9.53 6.48 1.02

1. TRACE WIDTH IS SHOWN FOR IT180, WITH DIELECTRIC THICKNESS .059"±.005". COPPER: 1/2 0z EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC

(SOLDER MASK OVER BARE COPPER)


DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- Low insertion loss
- 75Ω Impedance
- Excellent return loss 24 dB typ.
- · Low group delay variation
- · High cross over isolation
- · High rejection

Applications

• Cable TV systems (DOCSIS 3.1 standard) • Multiband radio systems



Generic photo used for illustration purposes only CASE STYLE: QC2228

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Pa	rameter	Port	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Insertion Loss	Low Pass	5-65	-	1.0	1.5	dB
		High Pass	85-1220	-	1.0	1.5	
	Return Loss	Low Pass	5-65	20	24	-	dB
Pass Band		High Pass	85-1220	20	24	-	
		Common	5-65	20	24	-	
			85-1220	20	24	-	
	i.		85-1220	43	50	-	dB
Stop Band Isolation		High Pass	5-65	50	55	-	
		Cross over	65-85	35	40	-	
			62-63.5	-	7	10	ns
Group Delay Variation		Low Pass	63.5-65	-	10	13	
		High Pass	112-116	-	1	2	
			120-124	-	1	1.5	

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)		RETURN LOSS (dB)		
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
5.0	0.08	78.27	46.33	49.89	0.03
10.0	0.09	73.74	39.46	43.70	0.02
35.0	0.19	61.67	30.83	30.62	0.09
62.0	0.84	60.58	28.49	25.34	0.42
63.5	0.97	58.20	31.14	26.82	0.45
65.0	1.16	59.11	36.14	34.55	0.48
68.0	2.20	50.60	14.85	14.02	0.56
69.0	3.29	43.05	9.92	8.94	0.59
70.5	6.78	32.11	5.04	4.13	0.67
72.0	12.68	23.32	2.86	2.05	0.80
72.5	15.05	20.92	2.52	1.72	0.86
73.0	17.57	18.72	2.29	1.47	0.95
73.5	20.25	16.67	2.15	1.30	1.06
74.5	26.13	13.00	2.13	1.06	1.40
75.0	29.40	11.35	2.24	0.98	1.64
77.0	46.39	6.08	3.71	0.78	3.51
78.0	56.56	4.31	5.23	0.72	5.17
80.0	58.15	2.29	9.79	0.63	9.95
85.0	61.00	1.03	25.23	0.52	27.14
112.0	52.85	0.42	30.57	0.43	28.69
116.0	51.96	0.39	28.94	0.42	27.45
120.0	51.36	0.38	27.89	0.42	26.60
124.0	50.94	0.36	27.13	0.42	26.04
250.0	53.12	0.23	30.03	0.34	41.07
500.0	51.82	0.26	26.79	0.31	26.77
750.0	50.00	0.32	25.61	0.34	24.85
900.0	50.24	0.38	29.39	0.41	25.67
1000.0	53.60	0.42	34.24	0.51	26.88
1220.0	52.81	0.57	26.33	0.67	34.04

Functional Schematic - LOW PASS GH PASS PORT

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's tandard Terms and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp


REV. A ECO-011290 EDU2533 DPLC-6585A0M+ URJ 220113 Page 2 of 3

DPLC-6585A0M+

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Performance Charts

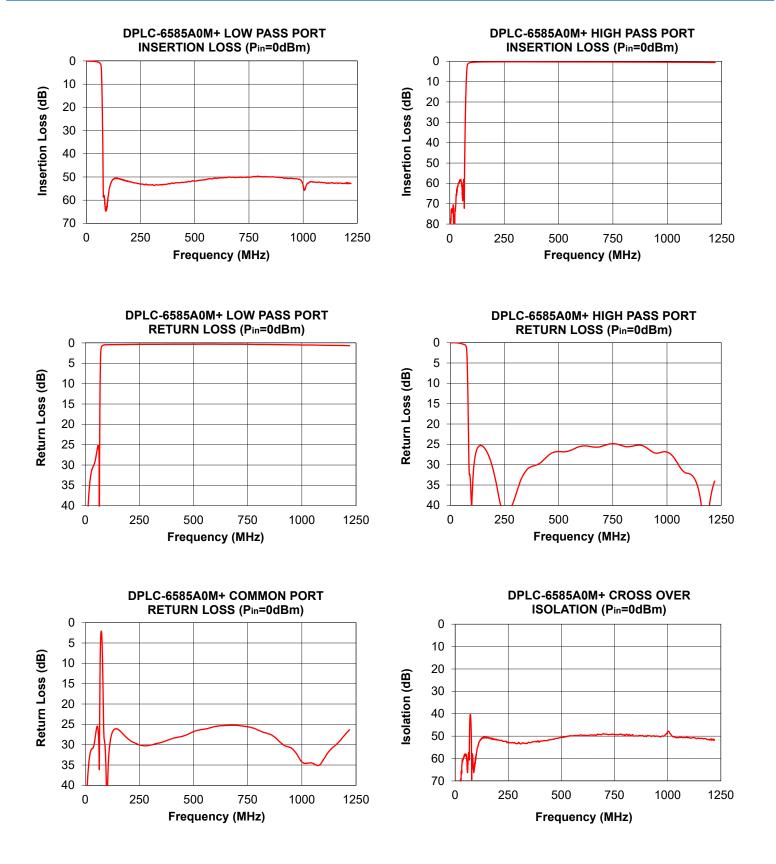

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard leimited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits