

Gain Equalizer

EQY-10-453+

Mini-Circuits

50Ω 10 dB DC to 45 GHz

THE BIG DEAL

- Wide bandwidth, DC to 45 GHz
- Excellent Return Loss, 20 dB typ.
- 10.2 dB Slope from DC to 45 GHz
- Small Package 2 x 2 mm MCLP
- Patent pending



Generic photo used for illustration purposes only

CASE STYLE: MC1630-1

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

Cellular Infrastructure

- 5G
- Wideband Communications
- Test Instrumentation
- Defense

PRODUCT OVERVIEW

EQY-10-453+ is an absorptive Gain Equalizer fabricated using highly repetitive GaAs IPD MMIC process incorporating resistors, capacitors and inductors having negative insertion loss slope. EQY-10-453+ has a nominal attenuation slope of 10.2 dB and is packaged in tiny 2 x 2 mm, 6-Lead MCLPTM package.

KEY FEATURES

| Feature | Advantages |
|---|--|
| Negative Insertion Loss Slope vs. Frequency | Useful for compesating negative gain slope of amplifiers, receivers, transmitters to achieve flat gain versus frequency. |
| Wide range of values available 3,4,5,6,7,8,9,10 dB | Enables circuit designer to change nominal insertion loss values without motherboard redesign making the EQY series ideal for select at test application. |
| Wideband operation, DC to 45 GHz | Supports a wide array of applications including wireless cellular, microwave communications, satellite, defense and aerospace, medical broadband and optic applications. |
| Excellent Power Handling Capability up to +30 dBm | Enables its use at the output of a variety of amplfiers |
| Small Size and simple to use (2 mm x 2 mm) | As a single chip solution, the EQY series occupies less board space than a lumped or distributed element approach, minimizes component count and ensures repeatable performance over wide frequency range. |

*GaAs IPD (Gallium Arsenide Integrated Passive Device)





MMIC MICROWAVE

Gain Equalizer

ELECTRICAL SPECIFICATIONS¹ AT 25°C, 50Ω, UNLESS OTHERWISE NOTED.

| Parameter | Frequency (GHz) | Min. | Тур. | Max. | Units |
|-----------------|-----------------|------|------|------|-------|
| Frequency Range | | DC | | 45 | GHz |
| Insertion Loss | 0.01 | 11.7 | 12.0 | 12.2 | |
| | 10 | 9.5 | 10.0 | 10.2 | |
| | 20 | _ | 6.9 | _ | dB |
| | 30 | 3.7 | 4.3 | 4.7 | |
| | 40 | _ | 2.4 | _ | |
| | 45 | _ | 1.8 | _ | |
| VSWR | 0.01 -10 | _ | 1.17 | _ | |
| | 10 - 20 | _ | 1.20 | _ | |
| | 20 -30 | _ | 1.27 | _ | :1 |
| | 30 - 40 | _ | 1.28 | _ | |
| | 40 - 45 | _ | 1.44 | _ | |

1. Measured on Mini-Circuits Characterization Test Board TB-EQY-10-453+. See Characterization Test Circuit (Fig. 1)

MAXIMUM RATINGS²

| Parameter | Ratings |
|-----------------------------|----------------|
| Operating Case Temperature | -55°C to 105°C |
| Storage Temperature | -65°C to 150°C |
| RF Input Power ³ | +28 dBm |


Permanent damage may occur if any of these limits are excedeed.
Derates linearly to +24 dBm at 105°C




MMIC MICROWAVE

Gain Equalizer

SIMPLIFIED SCHEMATIC & PAD DESCRIPTION





| Function | Pad Number | Description |
|----------|------------------|---------------|
| RF-IN | 2 | RF-Input pad |
| RF-OUT | 5 | RF-Output pad |
| GND | 1,3,4,6 & Paddle | Ground |

CHARACTERIZATION TEST CIRCUIT





Fig 1. Block Diagram of Test Circuit used for characterization. Test Board TB-EQY-10-453+ Conditions: Attenuation & Return Loss Pin=0 dBm

PRODUCT MARKING



Marking may contain other features or characters for internal lot control



Gain Equalizer

Mini-Circuits


ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS CLICK HERE

| | Data Table |
|--|---|
| Performance Data | Swept Graphs |
| | S-Parameter (S3P Files) Data Set (.zip file) |
| Case Style | MC1630-1 Plastic package, Lead finish: Matte-tin |
| Tape & Reel Standard quantities available on reel | F66 7″ reels with 20, 50, 100, 200, 500,1K or 2K devices |
| Suggested Layout for PCB Design | PL-663 |
| Evaluation Board | TB-EQY-10-453+ & TB-EQY-10-453C+ |
| Environmental Ratings | ENV08T1 |

ESD RATING

Human Body Model (HBM): Class 2 (Pass 2000V) in accordance with ANSI/ESD STM 5.1 - 2001 Machine.

MSL TEST FLOW CHART

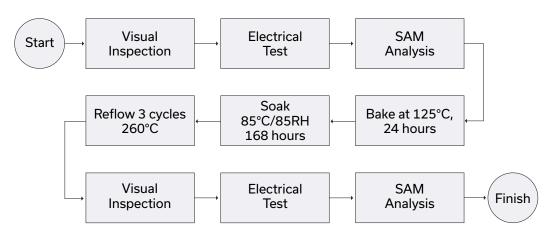

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html