



FLEXIBLE

# Coaxial Cable

## FL141-9SM+

50Ω 9 inch DC to 18 GHz SMA-Male

### THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 0.5 dB typ. at 18 GHz
- Excellent Return Loss, 26 dB at 18 GHz
- 10mm bend radius for tight installations
- Insulated outer jacket standard
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

<b>Model No.</b>	FL141-9SM+
<b>Case Style</b>	SG2637-9
<b>Connectors</b>	SMA-Male

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Replacement for custom bent 0.141" semi-rigid cables
- Communication Receivers and Transmitters
- Military and Aerospace Systems
- Environmental and Test Chambers
- Test Accessory

### PRODUCT OVERVIEW

The FL141 Series Flexible Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have brass coupling nut over nickel plated body with a gold plated brass center conductor. The FL141 Series Flexible cables are available in variety of length to meet your requirements.

### KEY FEATURES

Feature	Advantages
Flexible RF Cables	The FL141 Series Flexible cables are ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 10mm bend radius, the FL141 Flexible series is able to make connections in tight spaces making these cables ideal for dense system integration
Excellent Return Loss <ul style="list-style-type: none"> <li>• 28 dB typ. at 6 GHz</li> <li>• 28 dB typ. at 18 GHz</li> </ul>	The FL141 Series Flexible Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability <ul style="list-style-type: none"> <li>• 57W at 0.5 GHz</li> <li>• 33W at 18 GHz</li> </ul>	Mini-Circuits FL141 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes.





FLEXIBLE

# Coaxial Cable

**FL141-9SM+**

Mini-Circuits

50Ω 9 inch DC to 18 GHz SMA-Male

## ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	—	18	GHz
Length <sup>1</sup>		9			inches
Insertion Loss	DC - 2	—	0.09	0.24	dB
	2 - 6	—	0.21	0.44	
	6 - 10	—	0.30	0.59	
	10 - 18	—	0.37	0.83	
Return Loss	DC - 2	23	37	—	dB
	2 - 6	23	32	—	
	6 - 10	18	29	—	
	10 - 18	18	32	—	

1. Custom sizes available, consult factory.

## ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
Power Handling at 25°C, Sea Level	198W at 0.5 GHz 140W at 1 GHz 99W at 2 GHz 57W at 6 GHz 45W at 10 GHz 33W at 18 GHz

Permanent damage may occur if any of these limits are exceeded.





FLEXIBLE


# Coaxial Cable

FL141-9SM+

Mini-Circuits

50Ω 9 inch DC to 18 GHz SMA-Male


## CABLE CONSTRUCTION



- Center Conductor: Silver Plated Copper Clad Steel
- Dielectric: Fine Powder PTFE
- Inner Shield: Silver Plated Copper Tape
- Outer Shield: Silver Plated Copper Braid
- Jacket: FEP, Blue  
(Unjacketed cable also available upon request)

Connectors:  
 Coupling Nut: Stainless Steel Passivated  
 Body: Stainless Steel Gold Plated  
 Center Pin: Brass, Gold Plated

## OUTLINE DRAWING

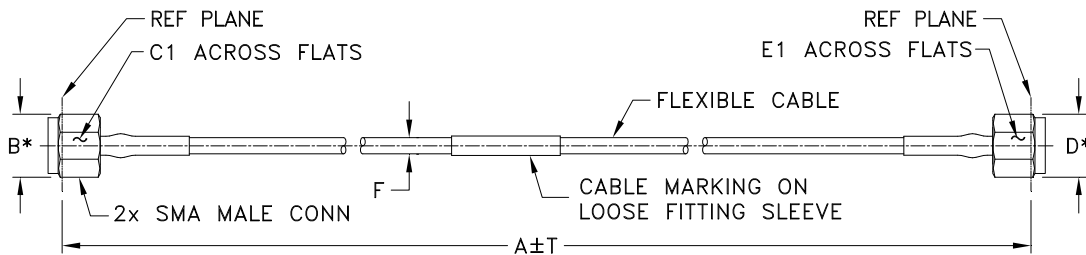

\* OVERALL CONNECTOR DIMENSION

## OUTLINE DIMENSIONS (Inch/mm)

A	B	C1	C2	D	E1	E2	F	T	wt
9.0	0.36	0.315	--	0.36	0.315	--	0.163±.006	0.05	grams
228.60	9.14	8.0	--	9.14	8.0	--	4.14±0.15	1.27	14.56





FLEXIBLE

# Coaxial Cable



## FL141-9SM+



50Ω 9 inch DC to 18 GHz SMA-Male

### TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMA-Male	SMA-Male
100	0.03	39.36	39.32
1000	0.11	38.86	38.38
2000	0.15	38.80	36.81
2500	0.16	40.55	38.00
4000	0.19	35.55	34.91
5000	0.23	27.97	28.34
6000	0.26	24.80	24.86
7000	0.28	23.81	24.10
8000	0.30	24.43	25.07
10000	0.32	33.48	34.97
12000	0.34	30.96	29.47
14000	0.37	31.89	30.21
16000	0.40	29.79	29.58
17000	0.42	26.32	25.90
18000	0.43	25.39	26.13

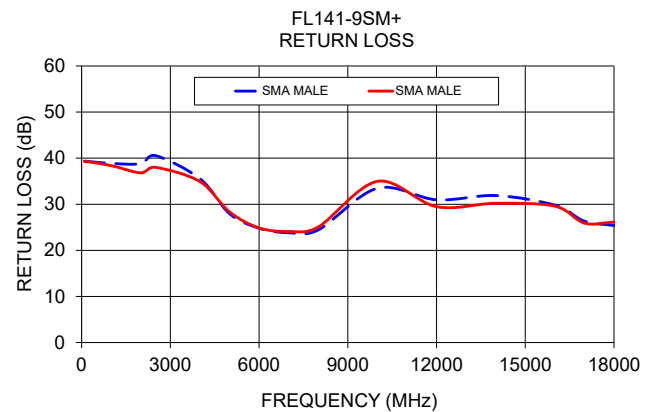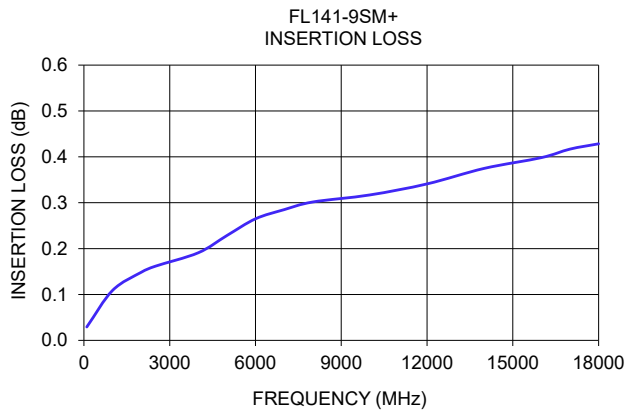

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

