

FLEXIBLE

Coaxial Cable

FL47-12SSMP+

 50Ω 12 inch DC to 40 GHz SMMP-Female

THE BIG DEAL

- · Wideband frequency coverage, DC to 40 GHz
- Low Loss, 2.7 dB typ. at 40 GHz
- Excellent Return Loss, 20 dB typ.
- 5 mm static bend, 10 mm dynamic bend
- · Insulated outer jacket standard
- Connector interface, meets IEEE STD 287-2007 standard
- Ideal for interconnect of assembled systems

APPLICATIONS

- · Replacement for custom bent semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers
- Test accessory



Generic photo used for illustration purposes only

Model No.	FL47-12SSMP+
Case Style	UL3032-12
Connectors	SMMP-Female

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualification:

PRODUCT OVERVIEW

The FL47 Series Flexible Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body with gold plated brass center conductor. The FL47 Series Flexible cables are available in variety of length to meet your requirements.

KEY FEATURES

Feature	Advantages			
Flexible RF Cables	The FL47 Series Flexible cables are ideal for use integrating coaxial components and subassemblies without the need for special cable-bending tools and alleviating the risk of damageduring the bending process typical of semi-rigid coaxial cable assemblies.			
Tight Bend Radius: 5mm static bend, 10mm dynamic	Capable of only 5mm static bend, 10mm dynamic bend radius, the FL47 Flexible series is able to make connections in tight spaces making these cables ideal for dense system integration			
Excellent Return Loss, • 28 dB at 26.5 GHz	The FL47 Series Flexible Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.			
Good Power Handling Capability: • 61W at 0.5 GHz • 8W at 18 GHz	Mini-Circuits FL47 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes			

PAGE 1 OF 4



Coaxial Cable

FL47-12SSMP+

 50Ω 12 inch DC to 40 GHz SMMP-Female

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Тур.	Max.	Units
Frequency Range		DC	-	40	GHz
Length ¹		12			inches
Insertion Loss	DC - 26.5	-	1.31	3.1	dB
	26.5 - 40	-	2.34	4.0	
Return Loss	DC - 26.5	17.7	28.73	-	dB
	26.5 - 40	14.6	23.92	-	

^{1.} Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings		
Operating Temperature	-55°C to +100°C		
Storage Temperature	-55°C to +100°C		
	61W at 0.5 GHz		
	16W at 6 GHz		
Down Llondling at 25°C Cool avail	8W at 18 GHz		
Power Handling at 25°C, Sea Level	6W at 26.5 GHz		
	2W at 40 GHz		
	1W at 50 GHz		

Permanent damage may occur if any of these limits are exceeded.


FLEXIBLE

Coaxial Cable


FL47-12SSMP+

 50Ω 12 inch DC to 40 GHz SMMP-Female

CABLE CONSTRUCTION

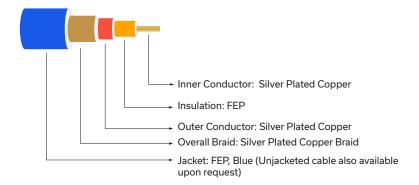

OUTLINE DRAWING

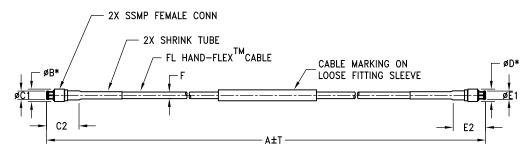

OUTLINE DIMENSIONS (Inch)

wt	Т	F	E1	D	C2	C1	В	Α
grams	.10	.055	.093	.14	.303	.093	.14	12.0
2.28	2.54	1.40	2.36	3.56	7.70	2.36	3.56	304.80




Coaxial Cable


FL47-12SSMP+

 50Ω 12 inch DC to 40 GHz SMMP-Female

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)		
		Input SMMP-Female	Output SMMP-Female	
100	0.20	37.59	37.42	
1000	0.50	30.36	30.14	
10000	1.31	43.44	43.27	
15000	1.59	34.45	30.73	
16000	1.63	37.13	33.98	
18000	1.74	28.60	28.56	
20000	1.83	30.86	31.80	
24000	2.04	21.58	24.81	
26000	2.12	24.02	26.32	
30000	2.30	24.94	23.51	
32000	2.39	26.34	21.89	
36000	2.61	18.57	18.44	
40000	2.74	19.88	25.92	

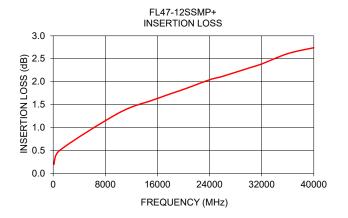

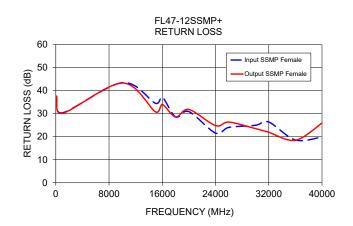

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html