



MMIC SURFACE MOUNT


Power Splitter/Combiner

GP2S+

2 Way-0° 50Ω 800 to 2100 MHz

FEATURES

- Wide bandwidth, 800 to 2100 MHz
- Excellent isolation, 24 dB typ.
- Excellent amplitude unbalance, 0.02 dB typ.
- Good phase unbalance, 0.8 deg. typ.
- Small size, 0.118"x0.118"x0.035"
- High ESD level
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Cellular
- GPS
- DCS
- WCDMA
- GSM
- Korea PCS

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		800		2100	MHz
Insertion Loss* (above 3.0 dB)	800-2100	—	0.8	1.4	dB
Isolation	800-2100	17	24	—	dB
Amplitude Unbalance	800-2100	—	—	0.2	dB
Phase Unbalance	800-2100	—	—	4	deg.
VSWR (Port S)	800-2100		1.2		:1
VSWR (Ports 1,2)	800-2100		1.2		


* De-embedded from demo board loss.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40 °C to 85 °C
Storage temperature	-65 °C to 150 °C
Power Input (as a splitter)	1.5 W max.
Internal Dissipation	0.75 W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

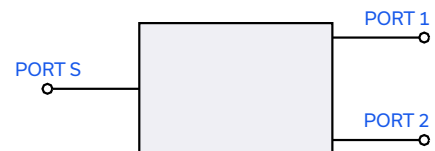





PAD CONNECTIONS

SUM PORT	2
PORT 1	7
PORT 2	9
GROUND	1,3,4,5,6,8,10,11,12, paddle

OUTLINE DRAWING

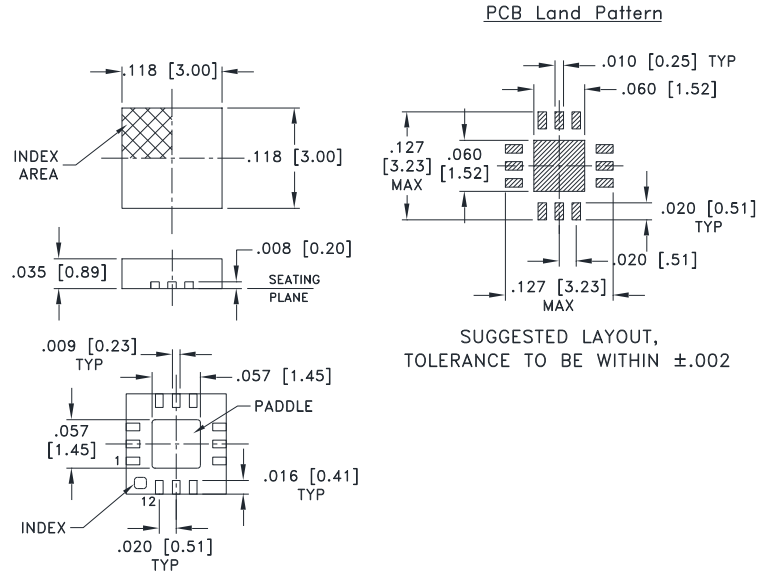

DEMO BOARD MCL P/N: TB-453-GP2S+ SUGGESTED PCB LAYOUT (PL-282)

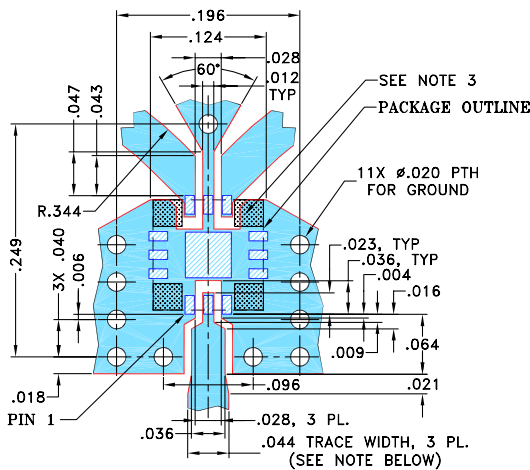


NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

PRODUCT MARKING

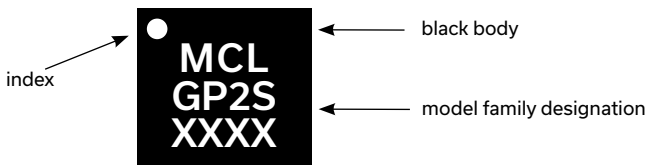

Marking may contain other features or characters for internal lot control

TAPE & REEL INFORMATION: F66




TYPICAL PERFORMANCE DATA AND CHARTS


Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
790	3.61	3.61	0.00	22.30	0.49	1.21	1.17	1.16
880	3.60	3.60	0.00	29.08	0.52	1.12	1.14	1.12
980	3.61	3.62	0.01	33.32	0.57	1.07	1.11	1.09
1070	3.64	3.65	0.01	26.49	0.66	1.10	1.09	1.07
1170	3.69	3.72	0.02	22.70	0.72	1.16	1.06	1.04
1260	3.74	3.77	0.04	21.01	0.78	1.22	1.04	1.02
1360	3.79	3.83	0.04	20.20	0.83	1.27	1.05	1.03
1450	3.84	3.88	0.04	20.24	0.87	1.30	1.07	1.05
1550	3.88	3.92	0.04	21.14	0.91	1.32	1.10	1.08
1640	3.91	3.94	0.03	22.91	0.97	1.30	1.14	1.11
1740	3.93	3.96	0.03	26.76	1.05	1.27	1.17	1.14
1830	3.95	3.97	0.02	34.69	1.16	1.22	1.20	1.17
1930	3.96	3.98	0.02	32.63	1.28	1.15	1.22	1.19
2020	3.98	3.99	0.01	24.55	1.41	1.08	1.24	1.21
2120	4.00	4.01	0.01	19.78	1.57	1.04	1.24	1.22

1. Total Loss = Insertion Loss + 3dB splitter loss.


GP2S+ TOTAL LOSS

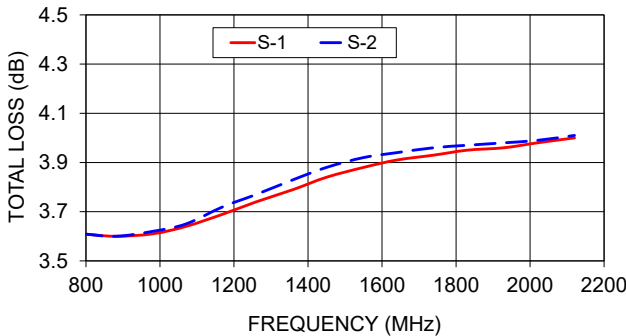

GP2S+ ISOLATION

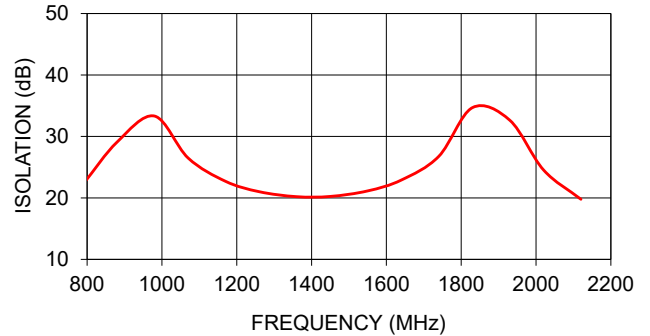

GP2S+ VSWR

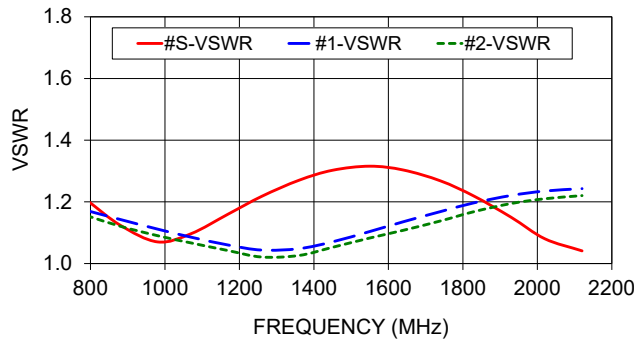

ESD RATING

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

