



COAXIAL

RF Instrument Amplifier **HPA-20M2G7025+**

50Ω 20 to 2700 MHz Broadband 25 W N-Type Female

THE BIG DEAL

- Broadband, 20 to 2700 MHz
- High Gain, 50 dB typ.
- High P1dB, +40 dBm typ.
- High OIP3, +49 dBm typ.
- Built-in 110/220V AC power supply




Generic photo used for illustration purposes only

APPLICATIONS

- Communication Systems
- R&D, Production, and OTA Test Systems
- General Laboratory Applications
- Test & Measurement Equipment

FUNCTIONAL DIAGRAM

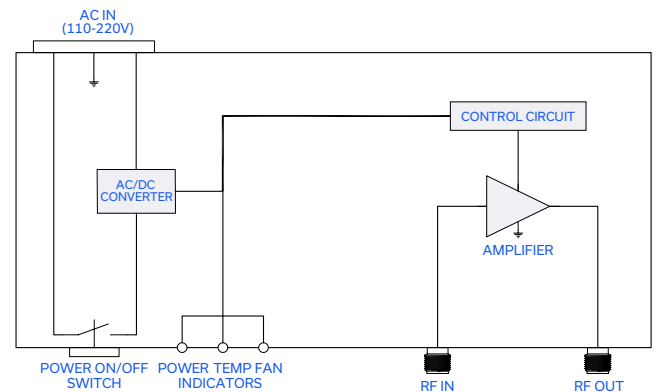

PRODUCT OVERVIEW

Mini-Circuits' HPA-20M2G7025+ is an instrument amplifier providing 25 W of output power with a typical small signal gain of 50 dB over the 20 to 2700 MHz frequency band. The amplifier uses state-of-the-art semiconductor technology and can be used in a wide range of applications. The amplifier runs on a built-in 110/220V power supply, making it easy to use in most lab environments. It features thermal self-protection, preventing damage to the amplifier and providing added reliability. It is housed in a lightweight aluminum alloy case (15.35 x 8.27 x 3.25") with N-type connectors, ideal for bench-top use.

KEY FEATURES

Features	Advantages
Extremely Broadband, 20 to 2700 MHz, and High Power, 25 W	One single amplifier that covers the entire frequency band delivering rated power.
High Gain, 50 dB Typ.	High gain allows low drive levels to achieve rated output power which can be obtained from many standard lab generators.
High OIP3, +49 dBm Typ.	High OIP3 makes the amplifier suitable for applications requiring high linearity such as digitally modulated signals.
Built-in 110V/220V power supply	Operating from a standard AC line power supply, the HPA-20M2G7025+ can be powered from 110 to 220V, making the amplifier versatile for use in most lab environments.
Thermally-self-protected	A built-in sensing feature signals the unit to power off when the amplifier reaches its maximum rated operating temperature, preventing damage to the equipment and providing added reliability.
CE marked	Meets conformity standards for sale within the European Economic Area (EEA).





Mini-Circuits

COAXIAL

RF Instrument Amplifier

HPA-20M2G7025+

50Ω 20 to 2700 MHz Broadband 25 W N-Type Female

ELECTRICAL SPECIFICATIONS AT $T_{\text{AMBIENT}} = +25^{\circ}\text{C}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Frequency Range	f		20		2700	MHz
Small Signal Gain	G_{SS}	$P_{\text{OUT}} = -25 \text{ dBm}$	45	50	55	dB
Small Signal Gain Flatness	$G_{\text{SS-FLAT}}$	$P_{\text{OUT}} = -25 \text{ dBm}$		± 0.8	± 2.0	dB
Output Power at 1dB compression	$P_{1\text{dB}}$	$P_{\text{OUT-REF}} = +35 \text{ dBm}$	+36	+40		dBm
Output Power at 3dB compression	$P_{3\text{dB}}$	$P_{\text{OUT-REF}} = +35 \text{ dBm}$	+40	+44		dBm
Output Power at Saturation	P_{SAT}	$P_{\text{OUT-REF}} = +35 \text{ dBm}$	+42	+45		dBm
Noise Figure	NF			10		dB
Output Third Order Intercept Point	OIP3	$P_{\text{OUT}} = +30 \text{ dBm/tone}$	+40	+49		dBm
Input Return VSWR	I-VSWR	$P_{\text{OUT}} = -25 \text{ dBm}$		1.2:1	2.5:1	dB
Output Return VSWR	O-VSWR	$P_{\text{OUT}} = -25 \text{ dBm}$		1:9:1	5:1	dB
AC Supply Voltage	V_{AC}		85	110/220	264	V
Power Consumption		AC = 220 V, $P_{\text{OUT}} = 25 \text{ W}$		200	300	W





COAXIAL







RF Instrument Amplifier

HPA-20M2G7025+

Mini-Circuits

50 Ω 20 to 2700 MHz Broadband 25 W N-Type Female

TYPICAL PERFORMANCE CHARTS AT $T_{\text{AMBIENT}} = +25^{\circ}\text{C}$, 50 OHM

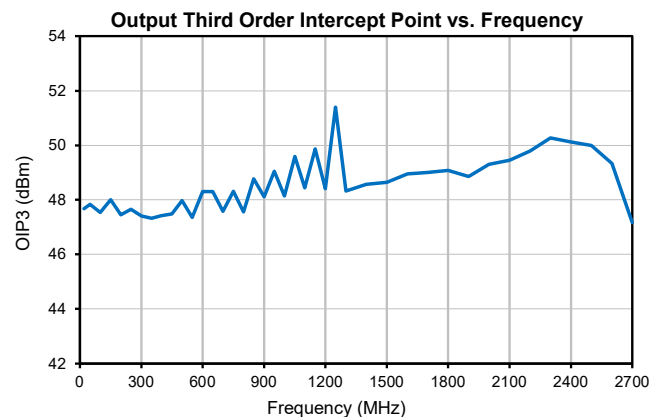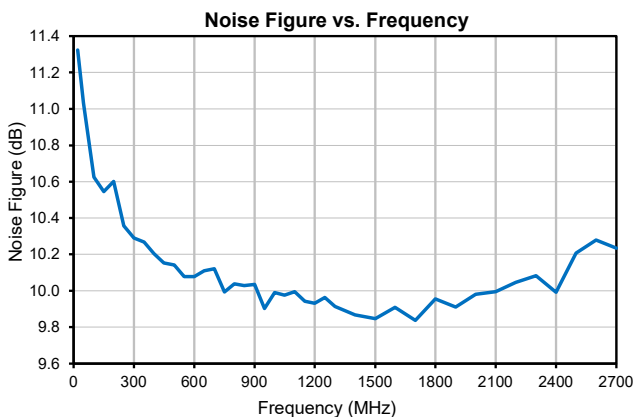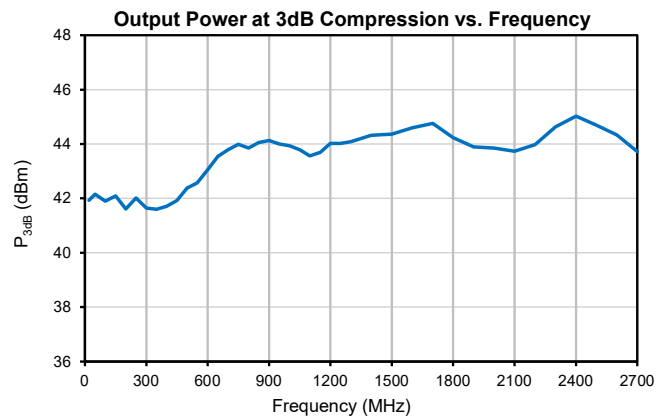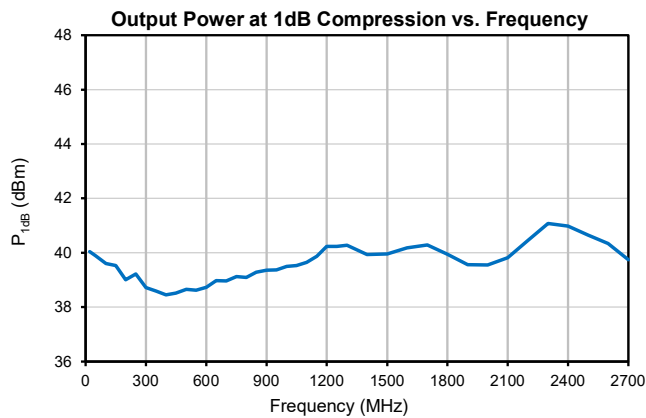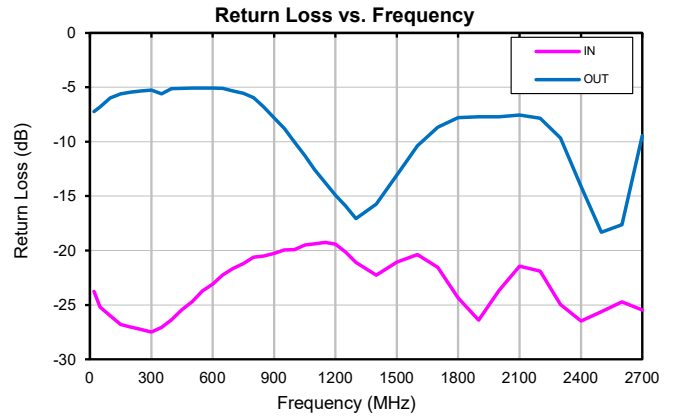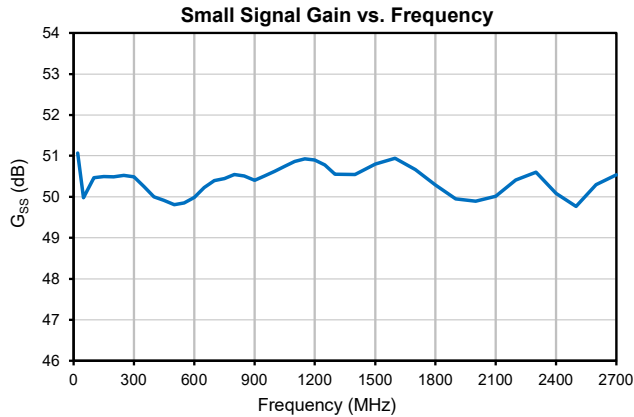

Mini-Circuits



Mini-Circuits

COAXIAL

RF Instrument Amplifier **HPA-20M2G7025+**

50Ω 20 to 2700 MHz Broadband 25 W N-Type Female

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	T_{AMBIENT} : 0 °C to +50 °C
Storage Temperature	-20 °C to +70 °C
No damage with an open or short output load under +42 dBm CW output power (2 minutes)	
RF Input Power (no damage)	+5 dBm

Permanent damage may occur if any of these limits are exceeded.

LED INDICATORS ON THE FRONT PANEL

Parameter	LED Color
Power	Green at Normal Operation
HPA Temperature Shutdown	Red at Temperature Shutdown (85 °C internal heatsink temperature \pm 5 °C)
Fan #1 and Fan #2	Red at Fan Failure

FRONT PANEL D-SUB PIN-OUTS FOR ALARMS

Pin#	Status	D-Sub Pin-Out
1	TTL High (3.3V) in case of High-Temperature Shut down	
2	TTL High (3.3V) in case of Fan Failure	
3	Ground	





COAXIAL


RF Instrument Amplifier **HPA-20M2G7025+**

50Ω 20 to 2700 MHz Broadband 25 W N-Type Female

COAXIAL CONNECTIONS

IN (RF IN)	N-Female
OUT (RF OUT)	N-Female

CASE STYLE DRAWING

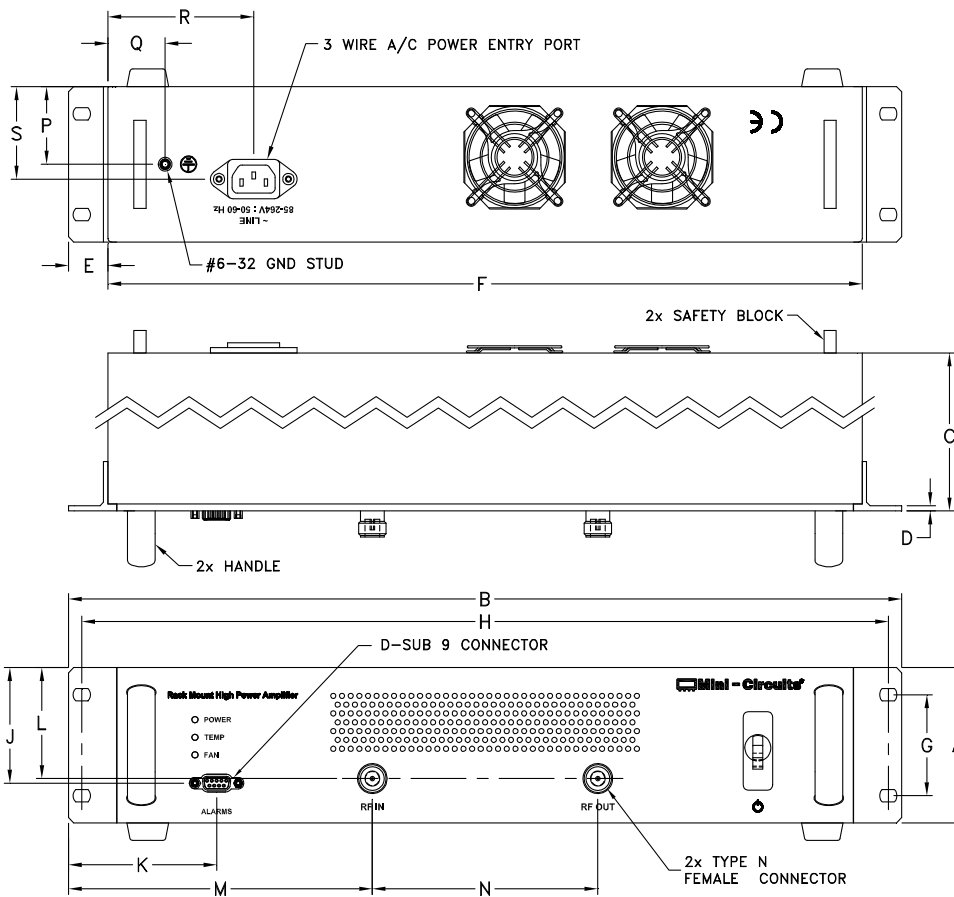

CASE #	A	B	C	D	E	F	G	H	J	K	L
NG1942-1	3.46 (88.0)	18.91 (480.4)	20.2 (513.0)	.12 (3.0)	.89 (22.7)	17.13 (435.0)	2.25 (57.2)	18.31 (465.0)	2.58 (65.5)	3.36 (85.4)	2.48 (62.9)

CASE #	M	N	P	Q	R	S	T	WT, GRAMS
NG1942-1	6.90 (175.2)	5.12 (130.0)	1.73 (44.0)	1.30 (33.0)	3.31 (84.1)	2.06 (52.4)	--	13910

Dimensions are in inches (mm). Tolerances: 2Pl. ±.03; 3Pl. ±.015 inch





Mini-Circuits

COAXIAL

RF Instrument Amplifier **HPA-20M2G7025+**

50Ω 20 to 2700 MHz Broadband 25 W N-Type Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
RoHS Status	Compliant
Environmental Ratings	ENV76

ORDERING INFORMATION

Model No. Links	HPA-20M2G7025+
Case Style	NG1942-1
Connector	IN (N-Female) / OUT (N-Female)

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

