

# Phase Shifter

50Ω 180° Voltage Variable 400 to 660 MHz

## JSPHS-661+



Generic photo used for illustration purposes only

CASE STYLE: BK276

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm max.
Control Voltage	20V



Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

IN	1
OUT	7
BIAS	4,6^
GROUND	2,3,5,8,9,10,11,12,13,14

^ proper operation is achieved with pins 4 or 6 or both connected to BIAS.

### Outline Drawing

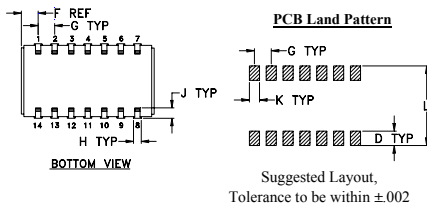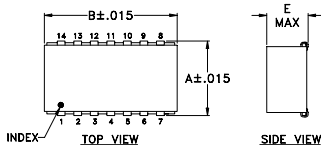


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.450	.803	--	.100	.250	.102	.100
11.43	20.40	--	2.54	6.35	2.59	2.54

H	J	K	L	wt
.047	.065	.065	.470	grams
1.19	1.65	1.65	11.94	3.0

### Demo Board MCL P/N: TB-122 Suggested PCB Layout (PL-030)

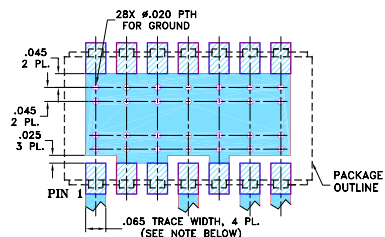

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- low insertion loss, 1.2 dB typ.
- good VSWR, 1.2:1 typ.
- J-leads for excellent solderability and strain relief
- aqueous washable

### Applications

- signal processing

### Phase Shifter Electrical Specifications

FREQUENCY (MHz)	PHASE RANGE (Degrees)	INSERTION LOSS (dB)		CONTROL VOLTAGE (V)	CONTROL BANDWIDTH (kHz)	VSWR (:1)
	Min.	Typ.	Max.		Typ.	Typ.
400-660	180	1.2	2.5	0-12	DC-50	1.2 2.2




Maximum operating power, 0 dBm

DC input resistance at Control port: 2000 ohms typ.


### Typical Performance Data

Control Voltage (V)	Phase Shift* (Degrees)			VSWR (:1)			Insertion Loss (dB)		
	400 MHz	510 MHz	660 MHz	400 MHz	510 MHz	660 MHz	400 MHz	510 MHz	660 MHz
0.0	0.01	0.01	0.02	1.71	1.45	1.56	1.50	1.38	1.37
1.0	27.08	14.39	6.14	1.64	1.44	1.56	1.50	1.43	1.41
2.0	57.73	32.00	13.34	1.56	1.37	1.55	1.44	1.45	1.45
3.0	93.24	57.12	23.57	1.50	1.29	1.54	1.32	1.46	1.56
4.0	129.69	93.86	40.22	1.48	1.18	1.48	1.19	1.41	1.54
5.0	159.07	136.75	67.58	1.51	1.09	1.35	1.09	1.27	1.56
6.0	178.10	170.91	105.08	1.55	1.08	1.15	1.07	1.13	1.51
7.0	189.31	192.06	141.95	1.57	1.10	1.03	1.04	1.06	1.40
8.0	196.02	204.60	169.46	1.59	1.13	1.09	1.06	1.02	1.28
9.0	200.35	212.48	188.21	1.60	1.15	1.11	1.07	1.00	1.18
10.0	203.35	217.84	201.16	1.61	1.16	1.10	1.07	1.00	1.11
11.0	205.58	221.75	210.54	1.62	1.17	1.09	1.07	0.99	1.06
12.0	207.31	224.74	217.61	1.62	1.18	1.07	1.07	0.99	1.02

\* Normalized at control voltage = 0V

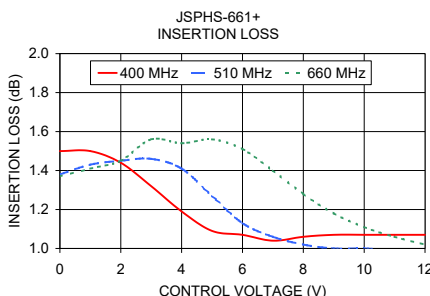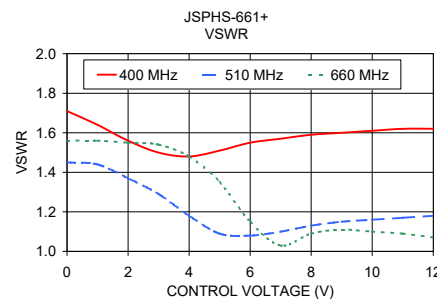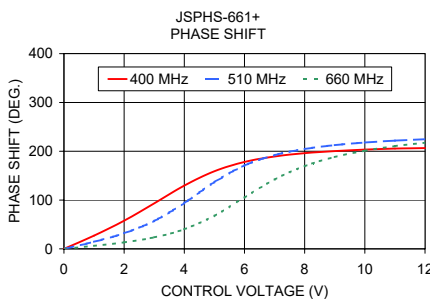

### electrical schematic

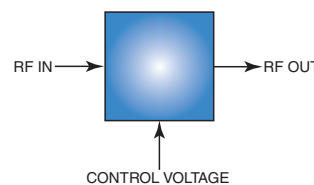

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

