


LOW PASS & HIGH PASS FILTERS *Designer's Kit K-LHP*

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION!

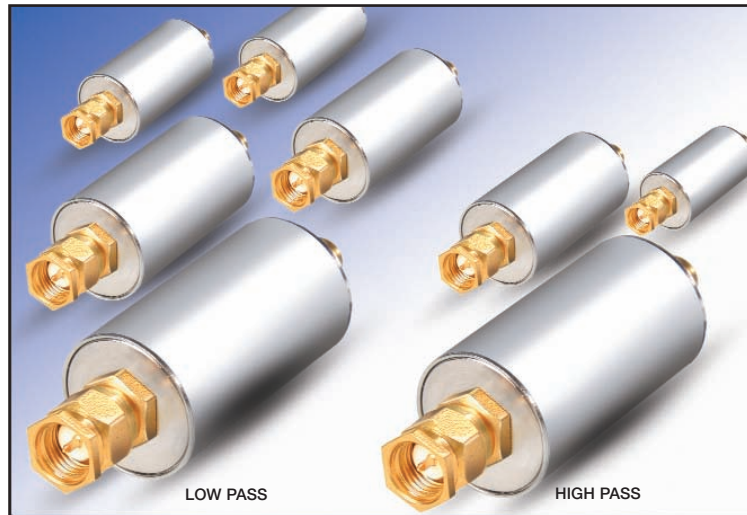

DC to 1800 MHz

SLP/SHP Features

- Wideband, 50 Ω
- Input pwr. 0.5 W max.
- Shielded stainless steel case
- SMA Male & Female connectors
- Low Pass: good attenuation rate (1.35 typ. 20 dB/3 dB BW ratio)

only **\$249⁰⁰** *ea. kit (8 models, 1 of each, 8 total)*

Kit K-LHP Electrical specifications of each model

Low Pass						
Model	Passband (MHz)	fco (MHz) Nom.	Stopband (MHz)		VSWR (:1)	
	(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
SLP-50	DC -48	55	70-90	90-200	1.7	18
SLP-100	DC -98	108	146-189	189-400	1.7	18
SLP-300	DC -270	297	410-550	550-1200	1.7	18
SLP-550	DC -520	570	750-920	920-2000	1.7	18
SLP-1000	DC -900	990	1340-1750	1750-2000	1.7	18

High Pass						
Model	Stopband (MHz)		fco (MHz) Nom.	Passband (MHz)	VSWR (:1)	
	(loss > 40 dB)	(loss > 20 dB)	(loss 3 dB)	(loss < 1 dB)	Stopband Typ.	Passband Typ.
SHP-200	DC -90	90-116	164	185-800	17	1.6
SHP-400	DC -210	210-290	360	395-1600	17	1.7
SHP-700	DC -400	400-520	640	700-1800	17	1.6

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF & MICROWAVE COMPONENTS

REV. A
M110332
K-LHP