

Surface Mount Attenuator/Switch

LRAS-2-75

75Ω Bi-Phase 10 to 1000 MHz



CASE STYLE: QQ130


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

INPUT	4
OUTPUT	1
CONTROL	5
GROUND	2,3,6

Outline Drawing

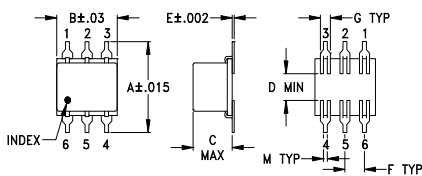


PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27
H	J	K	L	M	wt	
.420	.120	.060	.100	.020	grams	
10.67	3.05	1.52	2.54	0.51	0.55	

suggested control port biasing configuration

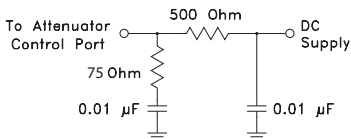

Demo Board MCL P/N: TB-34 Suggested PCB Layout (PL-043)

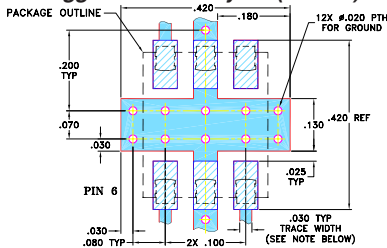

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 10 to 1000 MHz
- excellent phase and amplitude unbalance

Applications

- bi-phase modulator




Attenuator/Switch Electrical Specifications

FREQUENCY (MHz)		CON	INSERTION LOSS (dB) ±20 mA		MAX. INPUT PWR (dBm) ±20 mA		IN-OUT ISOLATION (dB) 0 mA			BI-PHASE X (±20 mA) Typ.							
f _L -f _U	Mid-Band m		Total Range	1 dB compr.	no damage	L	M	U	Δ AMP (dB)	Phase (deg.) deviation from 180°							
Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Total Range	Total Range						
10-1000	DC-0.05	4.1	6.0	4.5	7.5	20	25	58	40	42	28	39	20	0.15	0.3	1.5	3.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U] m = [2 f_L to f_U/2]
Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)		20mA ΔPhase (deg.)		Isolation (dB) (in-out)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl deg.			Input VSWR		
		10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz			10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz			
\bar{x}	σ	\bar{x}	\bar{x}	\bar{x}	\bar{x}	\bar{x}	\bar{x}	\bar{x}										
10.0	3.85	0.03	0.02	179.9	68	41	10.1	0.0000	72.9	42.4	27.4	77.0	123.7	-103.5	2.1	3.1	3.1	
11.1	3.82	0.03	0.02	179.9	68	40	10.2	0.0003	55.2	42.7	27.4	11.3	120.0	-102.9	2.1	3.1	3.1	
18.9	3.74	0.03	0.02	179.9	63	36	10.6	0.0005	53.2	42.9	27.5	7.8	118.9	-102.6	2.1	3.1	3.1	
20.0	3.74	0.03	0.02	180.0	63	35	10.7	0.0012	51.4	43.0	27.5	3.9	117.5	-102.4	2.1	3.1	3.1	
31.6	3.76	0.02	0.02	180.0	60	31	10.7	0.0020	48.6	43.5	27.5	-0.2	112.3	-101.5	2.1	3.1	3.1	
88.8	3.89	0.03	0.02	179.9	51	23	10.3	0.0057	43.1	45.3	27.5	1.3	90.0	-98.1	2.1	3.1	3.0	
100.0	3.92	0.03	0.02	179.9	50	22	10.2	0.0100	39.5	44.9	27.5	3.7	57.7	-94.3	2.0	3.1	3.0	
249.1	4.03	0.04	0.03	179.8	42	16	8.9	0.0159	36.4	42.4	27.5	5.1	30.2	-89.7	2.0	3.1	3.0	
297.8	4.07	0.05	0.03	179.8	41	15	8.5	0.0285	31.8	36.4	27.2	6.5	7.1	-79.2	2.0	3.0	2.9	
417.3	4.11	0.07	0.05	179.6	38	15	7.9	0.0446	28.2	32.0	26.8	7.2	-1.1	-68.6	1.9	2.9	2.8	
498.9	4.00	0.08	0.06	179.2	37	16	7.9	0.0715	24.6	27.7	25.4	7.4	-5.8	-54.2	1.8	2.8	2.7	
596.4	3.94	0.09	0.08	178.5	37	18	8.5	0.1020	21.8	24.5	23.6	7.5	-7.7	-43.6	1.7	2.7	2.6	
699.0	3.81	0.10	0.11	177.8	36	20	10.0	0.1879	17.4	19.7	20.0	7.0	-9.0	-27.2	1.5	2.5	2.4	
756.8	3.86	0.12	0.11	177.5	36	19	11.1	0.3050	14.2	16.2	16.9	6.3	-8.9	-17.7	1.4	2.3	2.2	
787.4	3.89	0.14	0.15	177.4	35	18	12.0	0.4255	12.2	14.0	14.9	5.7	-8.5	-12.5	1.2	2.1	2.0	
887.0	4.40	0.24	0.24	176.4	35	13	13.7	0.7057	9.7	11.2	12.3	4.5	-7.4	-6.6	1.1	2.0	1.8	
941.4	4.82	0.31	0.39	175.6	35	11	15.6	0.9950	8.3	9.6	10.9	3.7	-6.6	-3.4	1.2	1.9	1.6	
979.5	5.15	0.36	0.39	175.1	35	9	15.2	1.7446	6.5	7.4	9.2	2.5	-4.9	0.2	1.4	1.8	1.5	
999.1	5.30	0.38	0.40	175.0	35	9	14.5	5.6985	4.4	4.8	7.6	0.6	-1.6	1.8	1.8	1.8	1.2	
1019.2	5.47	0.41	0.45	175.1	35	8	13.8	15.0090	3.7	3.9	7.3	0.0	0.0	0.1	2.1	1.9	1.1	

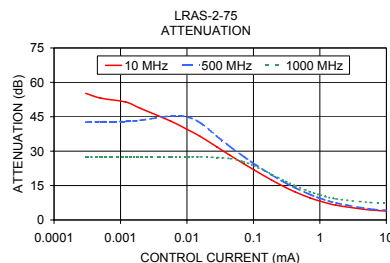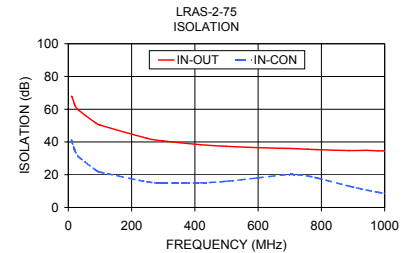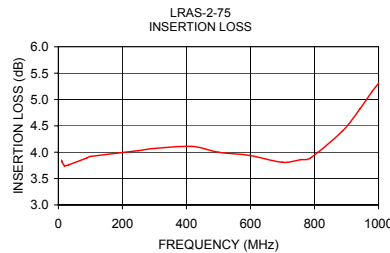

electrical schematic

