Xtra Long Life SPDT Switch

MSP2TA-18-12+ MSP2TA-18-12BM+

50 Ω DC to 18 GHz, 12 Volt, Absorptive

The Big Deal

- Extra long life 10 million cycles
- Low insertion loss, 0.25 dB
- High isolation, 80 dB
- Absorptive
- · Reliable sleep mode switching



Product Overview

Mini-Circuits' MSP2TA Series are ultra-reliable, rugged-duty absorptive fail-safe SP2T switches designed in breakbefore-make configuration offering an Ultra long switching life. Powered by +12VDC, the device has a typical switching speed of 20 milliseconds, insertion loss of 0.25 dB and high isolation of 80 dB. The MSP2TA Series are suitable for use across a wide range of applications, including switching for automated test equipment and redundancy switching.

Key Features

| Feature | Advantages |
|---|---|
| Extra long service life | Exceptionally long service life improves system reliability and reduces the need to replace switches often, making it ideal for automatic test systems. |
| High isolation, 80 dB typ. | Prevents interference from unwanted signals, ensuring signal integrity and accuracy of testing. |
| Reliable sleep-mode switching | Offers dependable performance even after being set at a fixed position for prolonged periods. Highly-reliable sleep mode switching averts failures due to "wake up," making it suitable for automatic testing as well as redundancy switching applications. |
| High repeatability between switching cycles | High repeatability of insertion loss between switching cycles ensures reliable performance critical for automated testing and other measurement applications. |

Xtra Long Life SPDT Switch

50 Ω DC to 18 GHz, 12 Volt, Absorptive

Features

- low voltage operation, 12V
- low insertion loss, 0.25 dB typ.
- high isolation, 80 dB typ.
- high power handling, 20W
- ultra reliable
- break-before-make configuration
- absorptive failsafe switch
 protected by US Patents 5,272,458; 6,414,577; 6,650,210; 7,633,361; 7,843,289

Applications

- Automatic Test Equipment (ATE)
- · redundancy switching for microwave radio

MSP2TA-18-12+ MSP2TA-18-12BM+



Generic photo used for illustration purposes only

| MSP2TA-18 | MSP2TA-18-12+ | | | | | | |
|-----------------|---------------|-------------------|---------------|--|--|--|--|
| Model No. | Connectors | Bracket Option | Case Style | | | | |
| MSP2TA-18-12+ | SMA | _ | FP914 | | | | |
| MSP2TA-18-12BM+ | SMA | Base Mount | FP914-BM | | | | |

See Page 4 for Mounting Options Available Option must be specified when ordering

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

| Parameter | Condition | Min. | Typ. (Note 1) | Max. | Unit | |
|-------------------------|-------------|-------------|---------------|------|--------|--|
| Frequency Range | | DC | _ | 18 | GHz | |
| | DC - 1 GHz | _ | 0.10 | 0.15 | | |
| Insertion Loss | 1 - 8 | _ | 0.15 | 0.30 | dB | |
| Insertion Loss | 8 - 12 | _ | 0.25 | 0.40 | UB | |
| | 12 - 18 | _ | 0.30 | 0.50 | | |
| | DC - 1 GHz | 85 | 100 | _ | | |
| Isolation | 1 - 8 | 75 | 90 | _ | dB | |
| Isolation | 8 - 12 | 70 | 80 | _ | UD UD | |
| | 12 - 18 | 60 | 66 | _ | | |
| | DC - 1 GHz | - | 1.05 | 1.10 | | |
| VSWR (Note 2) | 1 - 8 | _ | 1.20 | 1.30 | :1 | |
| VSWR (1002) | 8 - 12 | _ | 1.20 | 1.35 | | |
| | 12 - 18 | _ | 1.15 | 1.40 | | |
| Control Signal (Note 3) | at 12V | - | 350 | 430 | mA | |
| RF Power Cold Switching | DC - 18 GHz | _ | _ | 20 | w | |
| | 0.1W | 10 million | _ | _ | | |
| RF Power Hot Switching | 1W | — 3 million | | _ | Cycles | |

Notes

1. The performance values represents a common value for the frequency range. For typical performance across the frequency band, see performance graphs in the next page.

2. All ports, all states.

3. +12 Volt applied to energized port, COM is negative.

| Additional Specifications | | | | | | | | | |
|---------------------------|-----------------|--|--|--|--|--|--|--|--|
| Operating Voltage Range | 12V (nom) ±0.5V | | | | | | | | |
| Switching Time (Typ.) | 20ms | | | | | | | | |

Maximum Ratings

 Operating Temperature
 -15°C to +45°C


 Storage Temperature
 -15°C to +85°C

 RF Power (at IN port)
 20W

 RF Power (at J1 and J2)
 1W

 Control Voltage
 13VDC

 Permanent damage may occur if any of these limits are exceeded

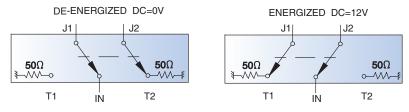



Switching States


MSP2TA-18-12+ MSP2TA-18-12BM+


| FREQ. (MHz) | ON INSERTION LOSS (dB) | | OFF ISOLATION (dB) | | | 'R, IN :1) | | R (J2) 1) | VSWR (J1) (:1) | | |
|----------------|------------------------------|-------|-----------------------|--------|------------------|---------------|------------------|--------------|-------------------|-----------|--|
| | IN-J2 | IN-J2 | IN-J1 | IN-J2 | De- Energized | Energized | De- Energized | Energized | De- Energized | Energized | |
| 10.0 | 0.01 | 0.01 | 79.15 | 78.83 | 1.00 | 1.01 | 1.06 | 1.00 | 1.01 | 1.04 | |
| 100.0 | 0.01 | 0.01 | 98.51 | 106.49 | 1.00 | 1.00 | 1.06 | 1.00 | 1.00 | 1.04 | |
| 1000.0 | 0.04 | 0.04 | 121.18 | 105.44 | 1.01 | 1.01 | 1.05 | 1.01 | 1.01 | 1.04 | |
| 2000.0 | 0.06 | 0.06 | 101.35 | 101.29 | 1.01 | 1.02 | 1.03 | 1.01 | 1.02 | 1.04 | |
| 3000.0 | 0.07 | 0.07 | 104.33 | 102.22 | 1.04 | 1.05 | 1.01 | 1.04 | 1.04 | 1.03 | |
| 4000.0 | 0.09 | 0.09 | 102.39 | 97.90 | 1.09 | 1.09 | 1.04 | 1.09 | 1.09 | 1.05 | |
| 5000.0 | 0.11 | 0.12 | 108.21 | 98.20 | 1.15 | 1.14 | 1.09 | 1.15 | 1.14 | 1.10 | |
| 6000.0 | 0.13 | 0.14 | 101.25 | 96.96 | 1.20 | 1.18 | 1.14 | 1.19 | 1.18 | 1.15 | |
| 7000.0 | 0.14 | 0.15 | 98.22 | 99.67 | 1.20 | 1.19 | 1.17 | 1.20 | 1.19 | 1.18 | |
| 8000.0 | 0.15 | 0.15 | 96.08 | 97.15 | 1.17 | 1.16 | 1.18 | 1.17 | 1.17 | 1.18 | |
| 9000.0 | 0.14 | 0.15 | 94.61 | 105.59 | 1.11 | 1.12 | 1.16 | 1.11 | 1.12 | 1.15 | |
| 10000.0 | 0.14 | 0.15 | 95.45 | 97.35 | 1.07 | 1.07 | 1.13 | 1.07 | 1.08 | 1.10 | |
| 11000.0 | 0.15 | 0.16 | 90.97 | 96.67 | 1.05 | 1.06 | 1.10 | 1.06 | 1.06 | 1.08 | |
| 12000.0 | 0.16 | 0.17 | 88.97 | 94.03 | 1.08 | 1.08 | 1.10 | 1.08 | 1.08 | 1.08 | |
| 13000.0 | 0.18 | 0.20 | 89.02 | 87.71 | 1.15 | 1.13 | 1.12 | 1.14 | 1.13 | 1.10 | |
| 14000.0 | 0.20 | 0.23 | 87.29 | 85.40 | 1.21 | 1.18 | 1.16 | 1.20 | 1.18 | 1.13 | |
| 15000.0 | 0.22 | 0.26 | 84.63 | 83.93 | 1.23 | 1.20 | 1.20 | 1.22 | 1.20 | 1.17 | |
| 16000.0 | 0.23 | 0.28 | 83.48 | 80.49 | 1.21 | 1.20 | 1.23 | 1.22 | 1.20 | 1.21 | |
| 17000.0 | 0.23 | 0.29 | 80.95 | 79.21 | 1.16 | 1.17 | 1.22 | 1.20 | 1.17 | 1.21 | |
| 18000.0 | 0.24 | 0.32 | 79.20 | 77.24 | 1.16 | 1.17 | 1.20 | 1.20 | 1.17 | 1.21 | |



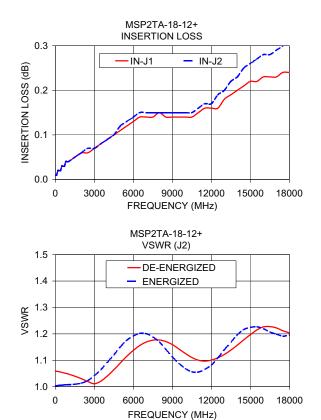

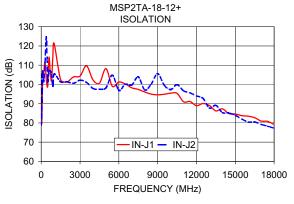



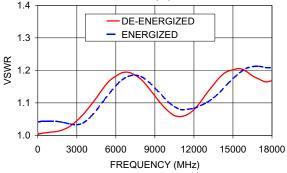


Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




MSP2TA-18-12+ MSP2TA-18-12BM+

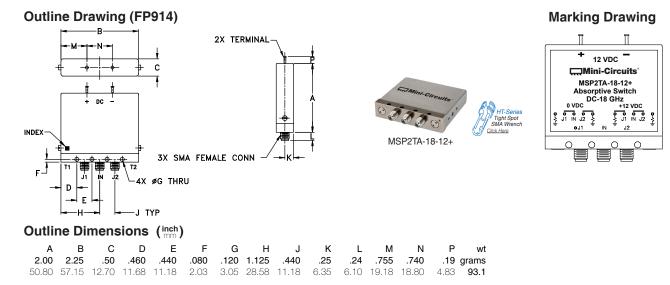

Outline Drawing (FP914-BM) Base Mount Bracket



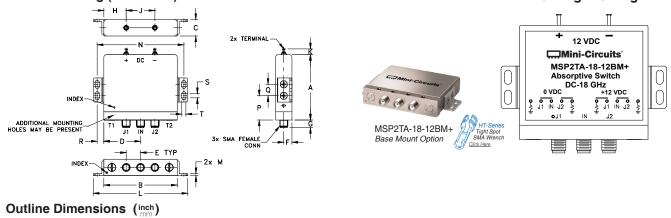

| Α | В | С | D | Е | F | G | н | J | K | L | М | Ν | Р | Q | R | S | т | wt |
|-------|-------|-------|-------|-------|------|------|-------|-------|------|-------|------|-------|-------|------|------|------|------|-------|
| 2.00 | 2.25 | .50 | 1.125 | .440 | .25 | .24 | .755 | .740 | .19 | 2.90 | .062 | 2.660 | .74 | .350 | .205 | .125 | .125 | grams |
| 50.80 | 57.15 | 12.70 | 28.58 | 11.18 | 6.35 | 6.10 | 19.18 | 18.80 | 4.83 | 73.66 | 1.57 | 67.56 | 18.80 | 8.89 | 5.21 | 3.18 | 3.18 | 96.6 |