

Coaxial High Pass Filter

50Ω 910 to 3000 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- rugged shielded case
- other standard and custom NHP models available with wide selection of fco

Applications

- lab use
- transmitters/receivers
- radio communications

NHP-900+
NHP-900



CASE STYLE: FF57			
Connectors	Model	Price	Qty.
N-Type	NHP-900(+)	\$39.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


High Pass Filter Electrical Specifications

STOPBAND (MHz)	fco (MHz) Nom.	PASSBAND (MHz)	VSWR (:1)
(loss > 40 dB)	(loss 3 dB)	(loss < 1 dB)	Stopband Typ. Passband Typ.
DC-520	520-660	820	17 1.8


Outline Drawing

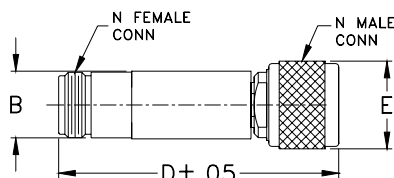

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
$\bar{x}$	σ			
10.00	72.21	5.66	200.00	0.70
100.00	89.68	6.07	300.00	0.51
200.00	76.93	0.41	400.00	0.70
300.00	65.78	0.70	500.00	0.81
400.00	56.60	0.75	555.00	0.84
500.00	46.37	0.63	560.00	0.85
555.00	39.93	0.58	600.00	0.96
560.00	39.31	0.58	650.00	1.10
600.00	34.17	0.57	690.00	1.33
650.00	27.47	0.60	695.00	1.36
690.00	21.80	0.63	700.00	1.36
700.00	20.35	0.64	705.00	1.41
760.00	11.49	0.69	760.00	2.07
805.00	5.35	0.58	805.00	2.98
810.00	4.78	0.55	810.00	3.08
815.00	4.25	0.52	815.00	3.17
820.00	3.76	0.49	820.00	3.24
825.00	3.31	0.45	825.00	3.30
830.00	2.90	0.41	830.00	3.33
900.00	0.77	0.03	900.00	2.40
950.00	0.66	0.04	950.00	1.81
1000.00	0.60	0.04	1000.00	1.44
1100.00	0.50	0.02	1100.00	1.19
1200.00	0.45	0.01	1200.00	0.99
1300.00	0.44	0.01	1300.00	0.85
1400.00	0.43	0.02	1400.00	0.75
1500.00	0.44	0.02	1500.00	0.67
1600.00	0.46	0.02	1600.00	0.62
2000.00	0.50	0.02	2000.00	0.48
3000.00	0.56	0.01	3000.00	0.38

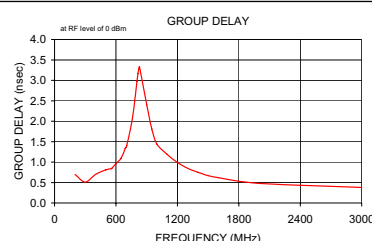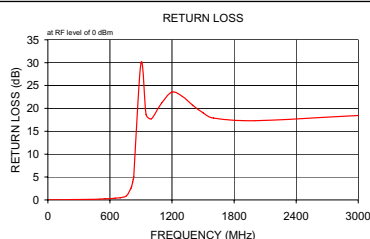

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. C
M98898
NHP-900
070221