

Coaxial

Low Pass Filter

50Ω DC to 1.9 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- rugged shielded case
- other NLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment

NLP-1.9+

NLP-1.9



CASE STYLE: FF57

Connectors	Model	Price	Qty.
N-Type	NLP-1.9(+)	\$37.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-1.9	2.5	3.4-4.7 4.7-200	1.7 18

1 dB compression at +13 dBm input power


Outline Drawing

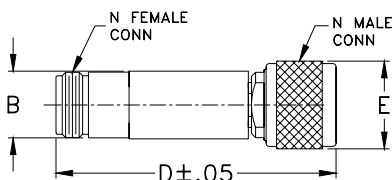


Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

typical frequency response






electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ		
0.10	0.09	0.01	1.00	390.94
1.20	0.24	0.02	1.00	393.92
1.40	0.26	0.01	1.10	397.21
1.60	0.31	0.01	1.10	400.27
1.80	0.40	0.02	1.20	406.34
1.90	0.45	0.02	1.30	410.76
2.10	0.75	0.12	1.30	417.77
2.30	2.93	0.75	1.40	425.39
2.50	8.32	1.21	1.40	434.33
2.70	14.69	1.17	1.50	444.37
2.80	17.71	1.12	1.60	455.27
3.00	23.30	1.01	1.60	468.79
3.10	25.89	0.96	1.70	484.50
3.30	30.68	0.90	1.80	506.65
3.40	32.92	0.87	1.90	554.15
3.60	37.12	0.84	1.90	579.78
3.80	41.00	0.81	2.00	642.41
4.00	44.61	0.79	2.10	720.76
4.30	49.67	0.81	2.20	779.41
4.50	52.78	0.80	2.30	768.87
4.70	55.74	0.88	2.40	675.19
5.00	60.00	0.86	2.50	579.64
29.40	92.50	4.17	2.70	390.84
53.80	91.19	3.63	2.80	286.22
78.10	92.39	2.10	3.00	230.56
102.50	87.80	2.75	3.10	182.81
126.90	89.05	3.87	3.30	153.96
151.30	87.17	2.60	3.40	132.22
175.60	92.87	7.14	3.60	109.19
200.00	86.82	4.04	3.80	92.80

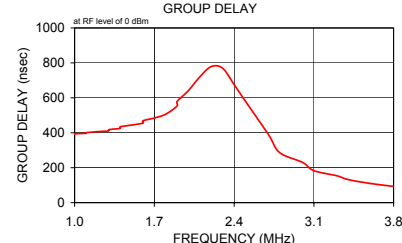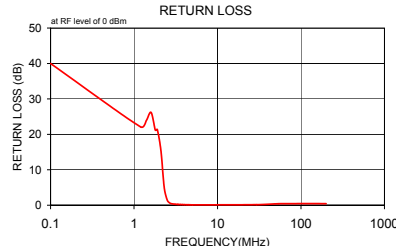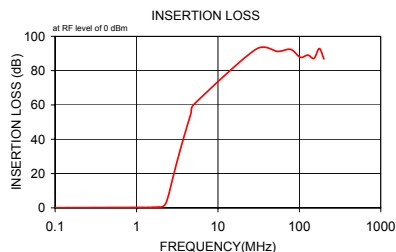

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M111708
NLP-1.9
070822