

Coaxial

Low Pass Filter

50Ω DC to 15 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other NLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment



CASE STYLE: FF57

Connectors	Model	Price	Qty.
N-Type	NLP-15(+)	\$35.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-15	17	23-32 32-200	1.7 18


Outline Drawing

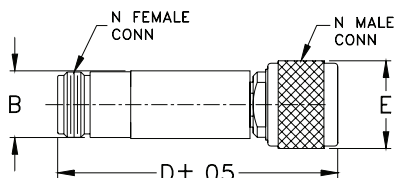


Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

typical frequency response




electrical schematic




Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$ σ			
1.00	0.21 0.04	24.91	1.00	48.07
3.00	0.26 0.04	20.32	1.10	47.91
5.00	0.30 0.04	20.46	1.30	48.21
7.00	0.33 0.05	25.27	1.40	47.67
9.00	0.38 0.05	24.09	1.60	48.07
11.00	0.47 0.07	20.00	1.80	47.68
13.00	0.58 0.07	19.00	2.00	48.30
15.00	0.81 0.06	16.36	2.30	48.44
17.00	2.32 0.37	7.61	2.50	48.37
19.00	8.82 0.63	2.63	2.90	48.63
19.80	12.25 0.57	2.04	3.20	48.63
20.60	15.66 0.53	1.72	3.60	48.80
21.40	18.93 0.50	1.51	4.00	48.88
22.20	22.02 0.48	1.36	4.60	49.48
23.00	24.94 0.48	1.25	5.10	49.49
23.80	27.72 0.47	1.15	5.80	50.43
25.40	32.87 0.50	0.99	6.50	50.77
27.10	37.90 0.60	0.86	7.30	51.87
28.70	42.24 0.70	0.76	8.20	53.05
30.40	46.55 0.86	0.67	9.30	54.47
32.00	50.45 1.02	0.60	10.40	56.61
33.60	54.18 1.48	0.55	11.70	60.33
54.40	77.82 6.04	0.22	13.10	66.08
75.20	77.17 4.69	0.12	15.00	80.27
96.00	81.80 4.39	0.09	17.00	100.53
116.80	80.95 4.80	0.08	18.80	81.42
137.60	80.75 3.87	0.07	21.10	43.84
158.40	83.26 4.95	0.07	23.00	28.31
179.20	79.58 3.64	0.06	26.60	15.72
200.00	80.96 5.21	0.06	30.00	10.37


INSERTION LOSS

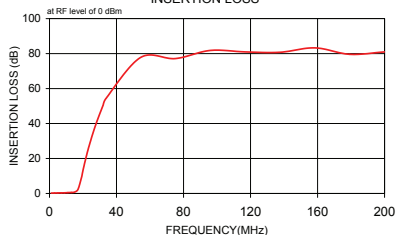

RETURN LOSS

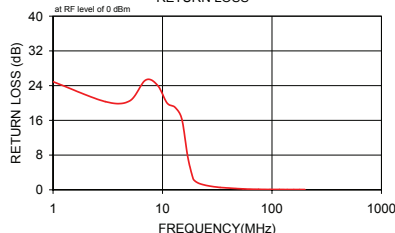

GROUP DELAY

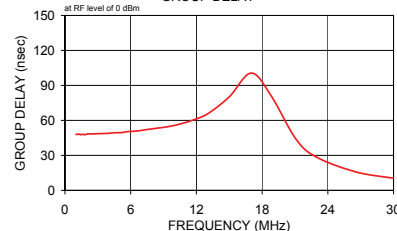

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. A
M98898
NLP-15
070308