

Ultra-Small Ceramic LTCC Power Splitter/Combiner

QCS-162+

2 Way-90° 50Ω 1550 to 1620 MHz

The Big Deal

- High Power handling (3W)
- Low Unbalance, 0.5 dB & 2 deg. typ.



CASE STYLE: GE0805C-14

Product Overview

Mini-Circuits new 90° Power Splitter, model: QCS-162+, offers an industry leading combination of operating bandwidth and size. The outstanding phase and amplitude unbalance make this component a versatile building block for use in a variety of systems and sub-system designs.

Key Features

Feature	Advantages
Small Size	Offered in the EIA-0805 package size, the QCS-162+ offers an industry leading combination of size, bandwidth and frequency. The small footprint (2.0mm x1.25mm) allows for reduced parasitics in systems with improved performance and simplified layout.
Low Phase and Amplitude Unbalance	Supporting 2 deg. and 0.5 dB unbalance make this 90° hybrid applicable for use in higher level integrated components such as image reject mixers, single sideband modulators, phase shifters, variable attenuators, and balance amplifiers.
High Power Handling	Capable of operating up to 3W, the LTCC construction of the QCS-162+ makes this 90° hybrid a robust, rugged product that can be used effectively in either the transmit or receive paths.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

QCS-162+

2 Way-90° 50Ω 1550 to 1620 MHz



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-14

Maximum Ratings

Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
Power Input (as a splitter)	3W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	2
PORT 1 (0°)	4
PORT 2 (+90°)	3
50 OHM TERM EXTERNAL	1

Features

- Low Insertion Loss, 0.5 dB typ
- High Isolation, 15 dB typ
- Miniature size, 0.079"x0.049"x0.028
- LTCC Construction

Applications



- Satcom
- Aeronautics

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000


Outline Drawing

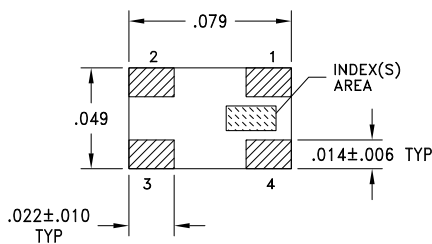

Outline Dimensions (inch/mm)

A	B	C	D	E	wt
.079	.049	.028	.022	.014	grams
2.01	1.24	0.71	0.56	0.36	.008


Electrical Schematic

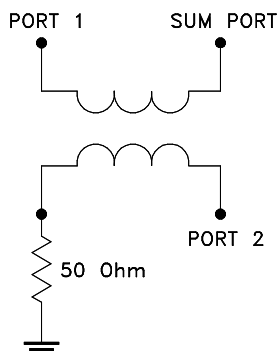

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		1550		1620	MHz
Insertion Loss (Avg. Of Coupled Outputs) above 3 dB	1550-1620	—	0.5	0.9	dB
Isolation	1550-1620	15	20	—	dB
Phase Unbalance	1550-1620	—	2	5	Degree
Amplitude Unbalance	1550-1620	—	0.5	1.2	dB
Return Loss	1550-1620	10	14	—	dB

Demo Board MCL P/N: TB-QCS-162+ Suggested PCB Layout (PL-696)

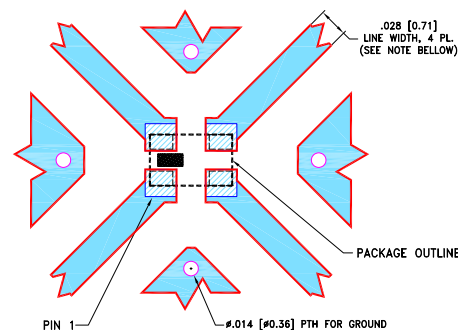

- NOTES:**
1. LINE WIDTH IS SHOWN FOR FR4 IT-180A, DIELECTRIC THICKNESS: .016±.001; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS LINE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Notes





- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

Frequency (MHz)	Total Loss' (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1550	3.21	3.17	0.04	23.04	89.53	1.13	1.15	1.17
1555	3.23	3.16	0.07	23.08	89.54	1.13	1.15	1.17
1560	3.24	3.15	0.10	23.15	89.54	1.13	1.15	1.17
1565	3.26	3.13	0.13	23.21	89.55	1.13	1.15	1.17
1570	3.28	3.11	0.16	23.31	89.57	1.13	1.15	1.17
1575	3.29	3.10	0.19	23.34	89.58	1.13	1.15	1.17
1580	3.31	3.09	0.22	23.39	89.58	1.13	1.15	1.17
1585	3.32	3.07	0.25	23.45	89.59	1.13	1.15	1.17
1590	3.34	3.05	0.28	23.51	89.60	1.13	1.15	1.17
1595	3.35	3.04	0.31	23.58	89.60	1.13	1.15	1.17
1600	3.37	3.03	0.34	23.63	89.61	1.13	1.15	1.17
1605	3.38	3.01	0.37	23.68	89.62	1.13	1.15	1.17
1610	3.40	3.00	0.40	23.73	89.63	1.13	1.15	1.17
1615	3.42	2.98	0.43	23.79	89.64	1.13	1.15	1.17
1620	3.43	2.97	0.46	23.82	89.65	1.13	1.15	1.17

1. Total Loss = Insertion Loss + 3dB splitter loss.

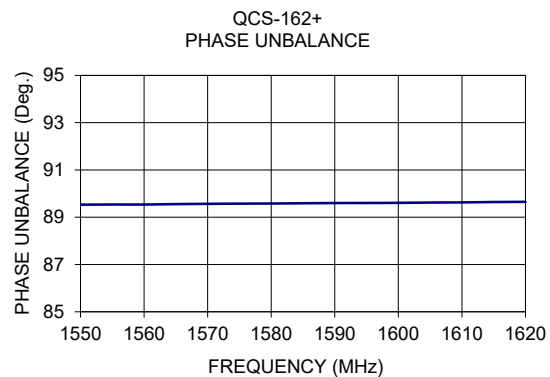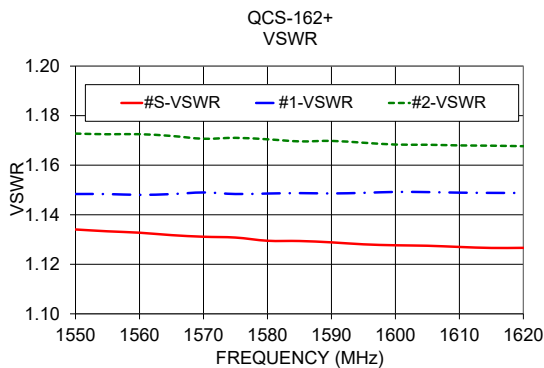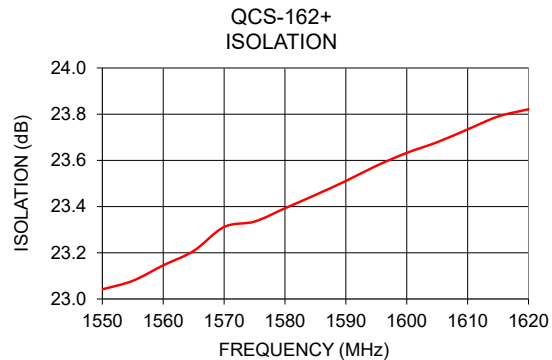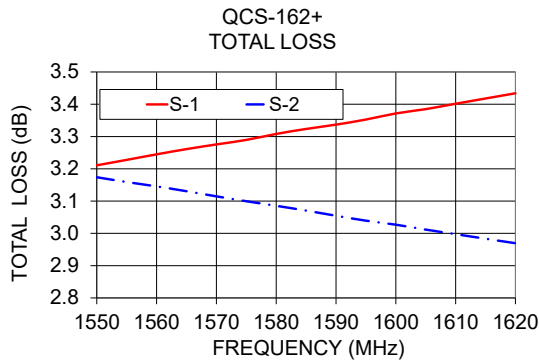

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

