

# Programmable Attenuator

RC4DAT-8G-95

50Ω 0 – 95 dB, 0.25 dB step 1 to 8000 MHz

## The Big Deal

- Four independently programmable channels
- Over 100 dB Isolation between channels
- Supports U-NII bands 5-8 (5.925 to 7.125 GHz)
- Fine attenuation resolution, 0.25 dB
- Automation via Ethernet & USB

## Applications

- Wi-Fi 6E MIMO development
- LTE / 5G / IoT / Bluetooth / Zigbee
- Cellular handover testing
- C-band radar / satcom testing
- Automated signal sweeping / fading

## Product Overview

Mini-Circuits' RC4DAT-8G-95 is a 4-channel programmable attenuator capable of supporting a wide range of signal level control applications from 1 MHz to 8 GHz. All 4 channels can be independently controlled with 0.25 dB attenuation resolution and more than 100 dB isolation between the channels. The dynamic range of each channel is 0 to 95 dB for applications up to 7.2 GHz and 0 to 90 dB up to 8 GHz. The unique attenuation design maintains linear attenuation change per dB, even at the highest attenuation settings.

All 4 bi-directional RF channels are housed in a single, compact and rugged package with SMA female connectors on all RF ports, a standard Ethernet port (RJ45) and a USB type C power and control port.

The attenuator can be controlled via USB or Ethernet (supporting HTTP, Telnet and SSH network protocols). Full software support is provided and can be downloaded from our website any time at <http://www.minicircuits.com/softwaredownload/patt.html>. The package includes our user-friendly GUI application for Windows® and a full API with programming instructions for Windows® and Linux® environments (both 32-bit and 64-bit systems).

## Key Features

| Feature  | Advantages  |
|--|---|
| USB & Ethernet control                           | USB HID and Ethernet (HTTP / Telnet / SSH) interfaces provide easy compatibility with a wide range of software setups and programming environments. The device draws all power requirements through the USB port. |
| Programmable attenuation sweep and Hop sequences | The RC4DAT-8G-95 can be programmed with a timed sequence of attenuation settings, to run without any additional external control  |
| 95 dB attenuation range                          | The RC4DAT-8G-95 provides high-accuracy attenuation up to 95 dB, allowing the user precise level control over a broad attenuation and frequency range.  |
| High linearity                                   | Typical input IP3 of +51 dBm up to 8000 MHz   |

**Trademarks:** Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Linux is a registered trademark of Linus Torvalds. Mac is a registered trademark of Apple Corporation. Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits RC4DAT-series attenuators are affiliated with or endorsed by the owners of the above referenced trademarks.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.



Generic photo used for illustration purposes only

Software Package

Case Style: QE2972

### Included Accessories

| Model No.     | Description       | Qty. |
|---------------|-------------------|------|
| USB-CBL-AC-3+ | 3.3 ft. USB cable | 1    |

### RoHS Compliant

See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications<sup>1,2</sup> at 0 to +50°C

| Parameter  | Frequency range                      | Conditions                                       | Min.                       | Typ. | Max.                       | Units |
|--|--------------------------------------|--|----------------------------|------|----------------------------|-------|
| Attenuation range  | 1 - 7200 MHz                         | 0.25 dB step                                     | 0                          | -    | 95                         | dB    |
|  | 7200 - 8000 MHz                      |  | 0                          | -    | 90                         |       |
| Attenuation accuracy <sup>3</sup>                                  | 1 - 2000 MHz                         | 0.25 - 20 dB                                     | -0.7                       | 0.4  | 0.4+5% of nominal value    | dB    |
|  |                                      | 20.25 - 60 dB                                    | -0.4-0.5% of nominal value | 1.7  | 0.9+4.5% of nominal value  |       |
|  |                                      | 60.25 - 80 dB                                    | -0.4-0.5% of nominal value | 3.0  | -0.4+6% of nominal value   |       |
|  |                                      | 80.25 - 95 dB                                    | -0.4-0.5% of nominal value | 3.7  | -3.6+10% of nominal value  |       |
|  | 2000 - 4000 MHz                      | 0.25 - 20 dB                                     | -0.7                       | 1.0  | 0.4+5% of nominal value    |       |
|  |                                      | 20.25 - 60 dB                                    | -0.7                       | 1.0  | 0.8+4.5% of nominal value  |       |
|  |                                      | 60.25 - 80 dB                                    | -0.6-1% of nominal value   | 2.0  | -0.8+6.5% of nominal value |       |
|  |                                      | 80.25 - 95 dB                                    | -0.6-1% of nominal value   | 2.8  | -3+9% of nominal value     |       |
|  | 4000 - 6000 MHz                      | 0.25 - 20 dB                                     | -0.4-5% of nominal value   | -0.2 | 0.75+4% of nominal value   | dB    |
|  |                                      | 20.25 - 60 dB                                    | -0.5-4.5% of nominal value | -0.6 | 1.2+2% of nominal value    |       |
|  |                                      | 60.25 - 80 dB                                    | -0.2-5% of nominal value   | -1.7 | 2+0.5% of nominal value    |       |
|  |                                      | 80.25 - 95 dB                                    | 3-9% of nominal value      | -2.3 | 2+0.5% of nominal value    |       |
|  | 6000 - 7200 MHz                      | 0.25 - 20 dB                                     | -0.4-5% of nominal value   | -0.5 | 0.7                        |       |
|  |                                      | 20.25 - 60 dB                                    | -0.7-4.5% of nominal value | -1.8 | 0.7                        |       |
|  |                                      | 60.25 - 80 dB                                    | 0.2-6% of nominal value    | -3.0 | 0.9                        |       |
|  |                                      | 80.25 - 95 dB                                    | 3.6-10% of nominal value   | -3.7 | 0.9                        |       |
|  | 7200 - 8000 MHz                      | 0.25 - 20 dB                                     | -0.6-6% of nominal value   | -0.6 | 0.3                        |       |
|  |                                      | 20.25 - 60 dB                                    | -1.2-4.5% of nominal value | -2.1 | 0.3                        |       |
|  |                                      | 60.25 - 80 dB                                    | -0.7-4.5% of nominal value | -2.7 | 0.2+2% of nominal value    |       |
|  |                                      | 80.25 - 90 dB                                    | -0.7-4.5% of nominal value | -2.9 | -1.7+6% of nominal value   |       |
| Insertion Loss   | 1 - 2000 MHz                         | 0 dB   | -                          | 4.2  | 6.0                        | dB    |
|  | 2000 - 4000 MHz                      |  | -                          | 5.6  | 8.0                        |       |
|  | 4000 - 6000 MHz                      |  | -                          | 7.4  | 9.0                        |       |
|  | 6000 - 7200 MHz                      |  | -                          | 8.3  | 11.5                       |       |
|  | 7200 - 8000 MHz                      |  | -                          | 10   | 12.0                       |       |
| Isolation In - Out (within a channel)                              | 1 - 8000 MHz                         | Note 4   | -                          | 100  | -                          | dB    |
| Isolation (between channels) <sup>5</sup>                          | 1 - 8000 MHz                         | 0 - 95 dB  | 100                        | 125  | -                          |       |
| Input operating power <sup>6</sup><br>(RF In and RF Out out ports) | 1 - 50 MHz                           | 0 - 95 dB  | -                          | -    | Note 7                     | dBm   |
|  | 50 - 8000 MHz                        |  | -                          | -    | +28                        |       |
| IP3 Input <sup>8</sup>   | 1 - 5000 MHz                         | 0 dB setting<br>(P <sub>IN</sub> =+5 dBm)        | -                          | +53  | -                          | dBm   |
|  | 5000 - 8000 MHz                      |  | -                          | +48  | -                          |       |
| VSWR   | 1 - 2000 MHz                         | 0 - 95 dB  | -                          | 1.15 | -                          | :1    |
|  | 2000 - 4000 MHz                      |  | -                          | 1.20 | -                          |       |
|  | 4000 - 6000 MHz                      |  | -                          | 1.25 | -                          |       |
|  | 6000 - 7200 MHz                      |  | -                          | 1.50 | -                          |       |
|  | 7200 - 8000 MHz                      |  | -                          | 1.80 | -                          |       |
| Min Dwell Time per channel <sup>9</sup>                            | 1 - 8000 MHz                         | High speed mode                                  | -                          | 600  | -                          | μsec  |
| Channel Synchronization <sup>10</sup>                              | 1 - 8000 MHz                         | Note 9   | -                          | 400  | -                          | μsec  |
| Attenuation Transition Time <sup>11</sup>                          | 1 - 8000 MHz                         | -  | -                          | 650  | -                          | nsec  |
| Supply Voltage   | -                                    | via USB port                                     | 4.75                       | 5    | 5.25                       | V     |
| USB current draw   | -                                    | -  | -                          | 210  | 330                        | mA    |
| Ethernet Communication   | Protocol                             | TCP / IP, HTTP, Telnet, DHCP, UDP (limited), SSH |                            |      |                            |       |
|  | Max Data Rate                        | 100 Mbps (100 Base-T Full Duplex)                |                            |      |                            |       |
| USB Communication  | Protocol                             | HID (Human Interface Device) - High Speed        |                            |      |                            |       |
|  | Min Communication Time <sup>12</sup> | 400 μs typ (full transmit/recieve cycle)         |                            |      |                            |       |

<sup>1</sup> Attenuator RF ports are interchangeable, and support simultaneous, bidirectional signal transmission, however the specifications are guaranteed for the RF in and RF out as noted on the label. There may be minor changes in performance when injecting signals to the RF Out port.

<sup>2</sup> RF performance specified per channel, performance of all four channels is identical.

<sup>3</sup> Min/Max accuracy defined as [absolute error+-% of attenuation setting] for example when setting the attenuator to 90 dB attenuation the maximum error at 7500 MHz will be Min=(-0.7-0.045x90)=(-0.7-4.05)=-4.75 dB, Max=(-1.7+0.06\*90)=(-1.7+5.4)=3.7 dB, meaning actual attenuation will be in the 93.7 to 85.25 dB range.

<sup>4</sup> Isolation In-Out is defined as max attenuation plus insertion loss; this is the path loss through the attenuator when initially powered up. After a brief delay (~0.5 sec typically) the attenuator will revert to a user defined "power-up" state (either max attenuation or a pre-set value).

<sup>5</sup> Isolation between channels may drop to 95 dB when both channels being tested are at 0 dB attenuation state.

<sup>6</sup> Total operating input power per channel from both RF In and RF Out out ports. Compression level not noted as it exceeds max safe operating power level.

<sup>7</sup> Derate linearly from +28 dBm at 50 MHz to +17 dBm at 1MHz.

<sup>8</sup> Tested with 1 MHz span between signals.

<sup>9</sup> Minimum Dwell Time is the time the module will take to respond to a command to change attenuation states in a channel without communication delays. In PC control add communication delays (on the order of msec for USB) to get actual response time.


<sup>10</sup> Channel Synchronization is the delay between the first and last attenuator transitions beginning, in response to a command to set all channels.

<sup>11</sup> Attenuation Transition Time is specified as the time between starting to change the attenuation state and settling on the requested attenuation state.


<sup>12</sup> USB min communication time is based on the polling interval of the USB HID protocol(125 μs polling interval, 64 bytes per packet), medium CPU load and no other high speed USB devices using the USB bus.



## Programmable Attenuator response to communication interrupt

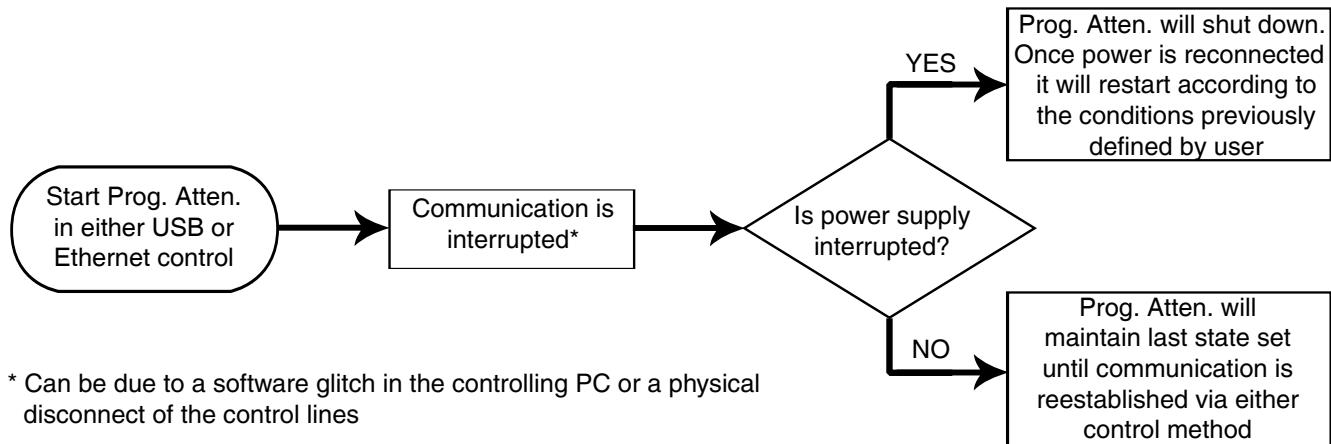

## Block Diagram

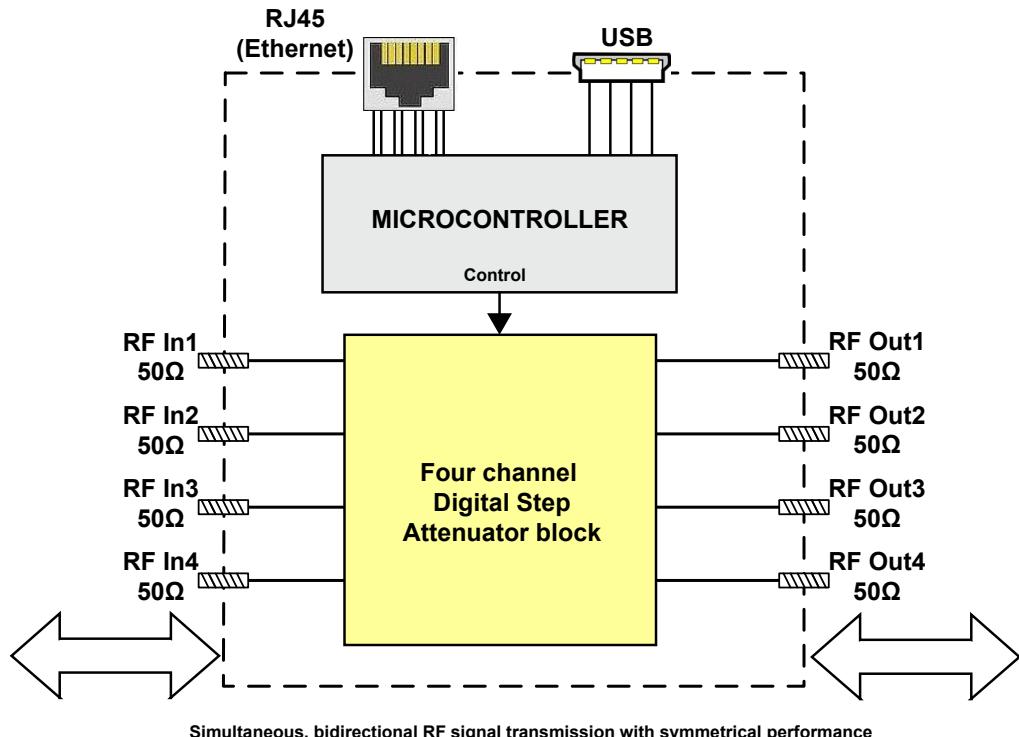

## Connections

|                        |                     |
|------------------------|---------------------|
| RF In 1,2,3,4          | (SMA female)        |
| RF Out 1,2,3,4         | (SMA female)        |
| USB                    | (USB type C female) |
| Network (Ethernet/LAN) | (RJ45 socket)       |

## Absolute Maximum Ratings


|                                      |                                 |  |
|--------------------------------------|---------------------------------|--|
| Operating Temperature                | 0°C to 50°C                     |  |
| Storage Temperature                  | -20°C to 85°C                   |  |
| V <sub>USB</sub> Max.                | 6V                              |  |
| DC voltage at RF port                | 16V                             |  |
| Total RF power for<br>RF In & RF Out | @ 1 - 50 MHz<br>@ 50 - 8000 MHz | Derates linearly from +33 @ 50 MHz to +20 @ 1 MHz<br>+33 dBm |

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

# USB/Ethernet Programmable Attenuator


**RC4DAT-8G-95**

## Outline Drawing (QE2972)

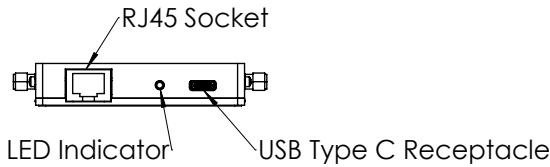

### Connections

|                        |                     |
|------------------------|---------------------|
| RF IN 1, 2, 3, 4       | (SMA female)        |
| RF OUT 1, 2, 3, 4      | (SMA female)        |
| USB                    | (USB type C female) |
| Network (Ethernet/LAN) | (RJ45 socket)       |

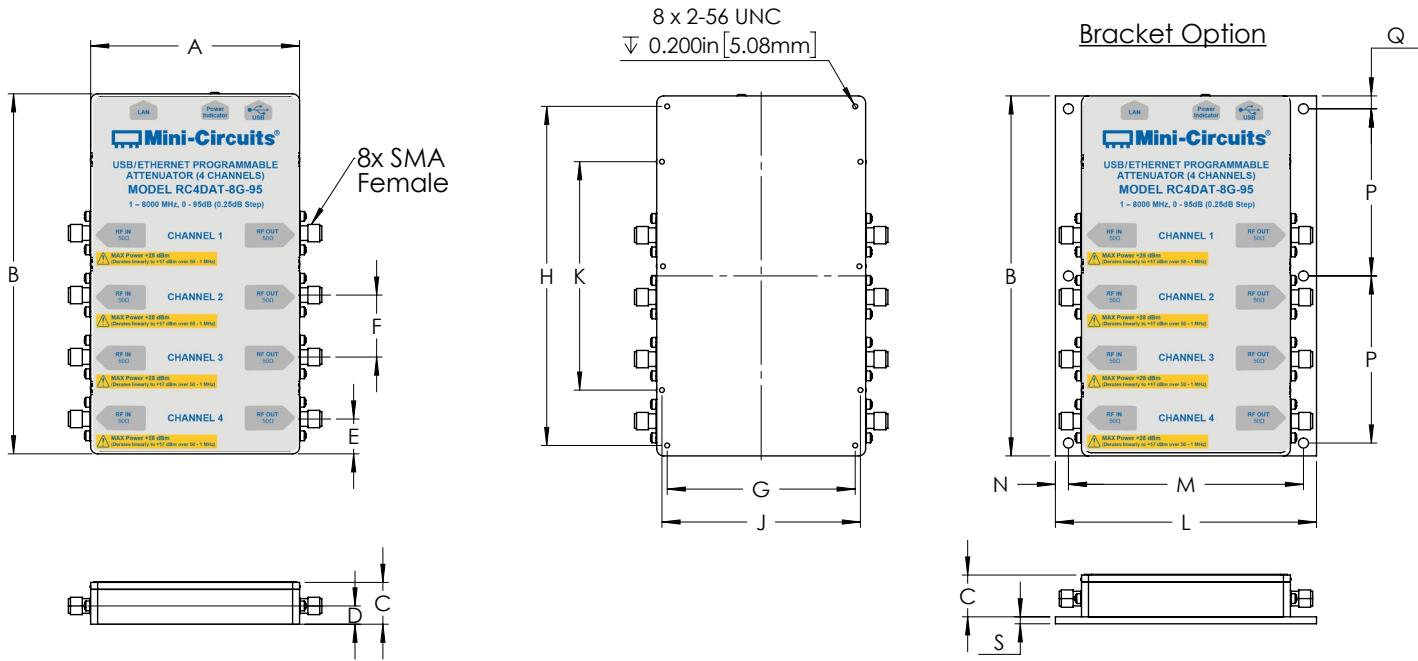

### Instruction for mounting bracket:

1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

### Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

| A    | B     | C     | D     | E    | F    | G     | H     | J     | K     | L     | M     | N     | P     | Q     | R     | S     | WT.<br>GRAMS |
|------|-------|-------|-------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|
| 3.00 | 5.17  | 0.600 | 0.262 | 0.50 | 0.89 | 2.700 | 4.870 | 2.850 | 3.280 | 3.75  | 3.375 | 0.188 | 2.400 | 0.185 | 0.144 | 0.100 | 300          |
| 76.2 | 131.3 | 15.24 | 6.65  | 12.7 | 22.6 | 68.58 | 123.7 | 72.39 | 83.31 | 95.25 | 85.72 | 4.76  | 60.96 | 4.70  | 3.66  | 2.54  |              |







**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Page 4 of 10







## Typical Performance Curves \*

\*at +25°C unless noted otherwise

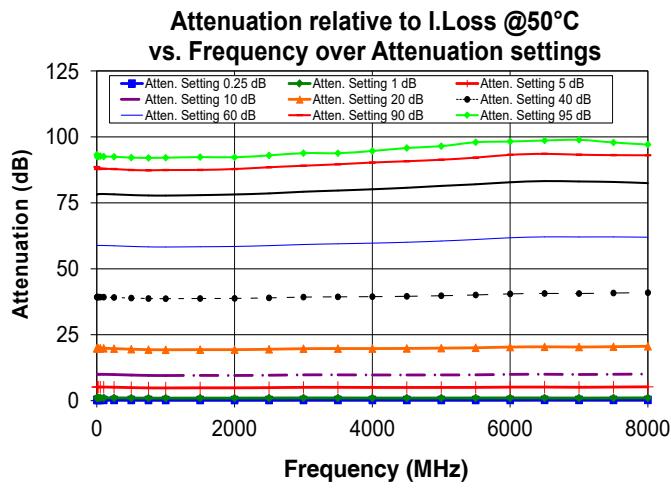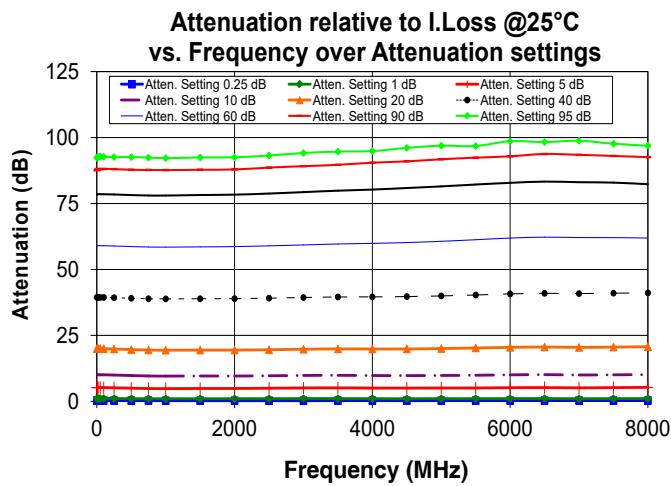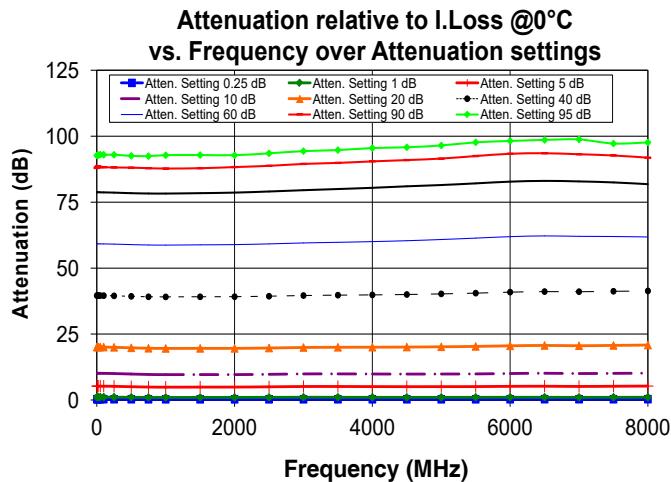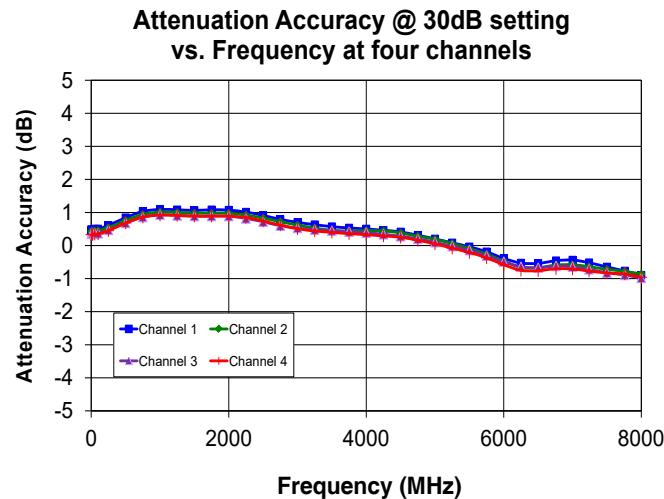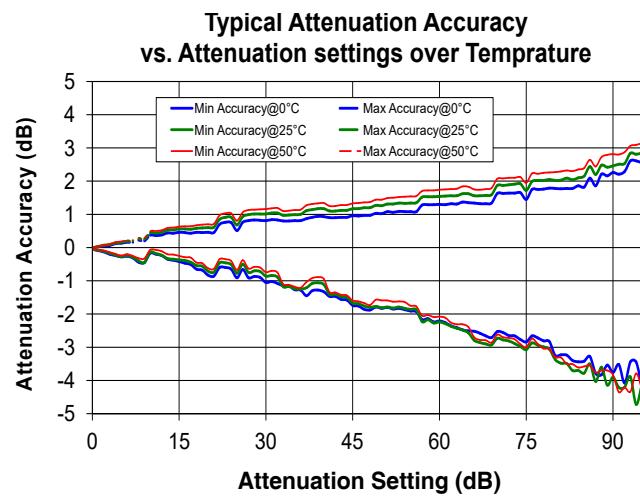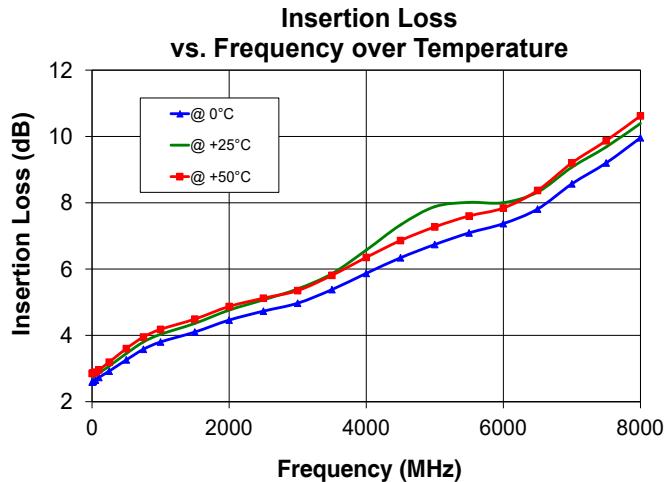

**Typical Performance Curves (Continued) \***

\*at +25°C unless noted otherwise

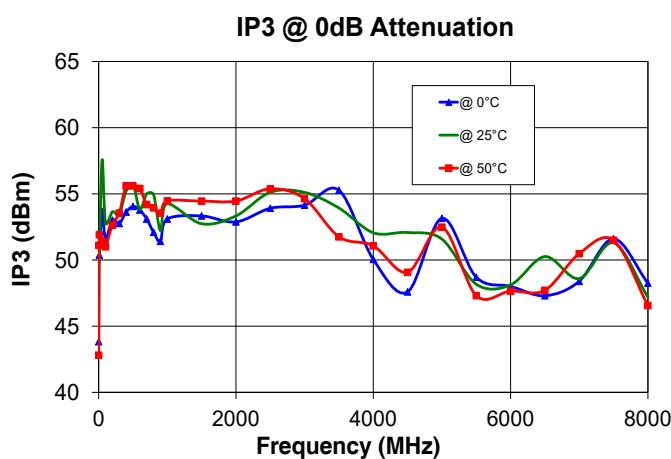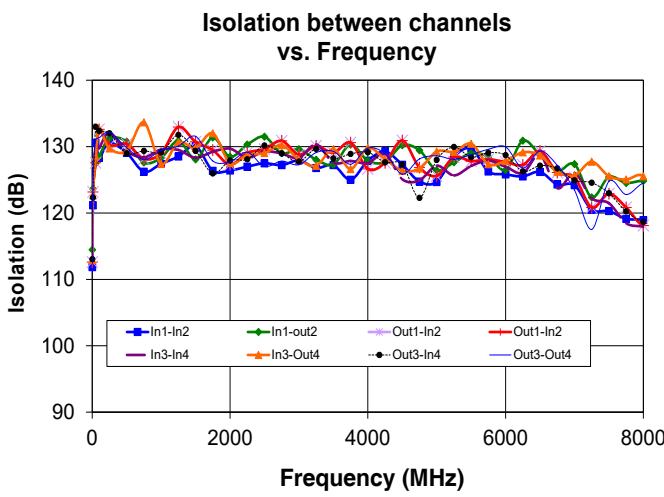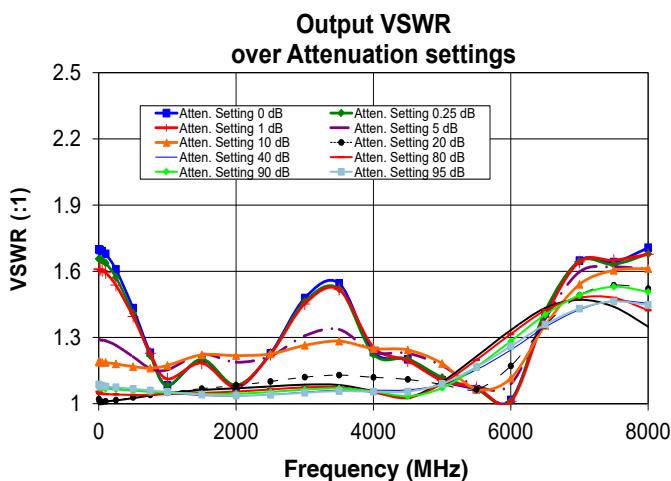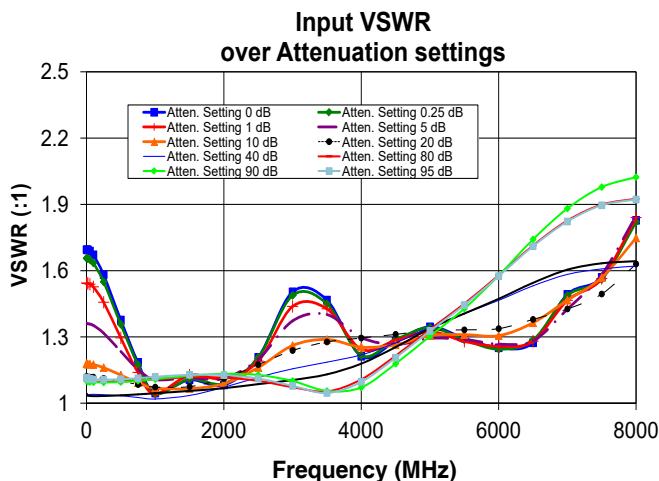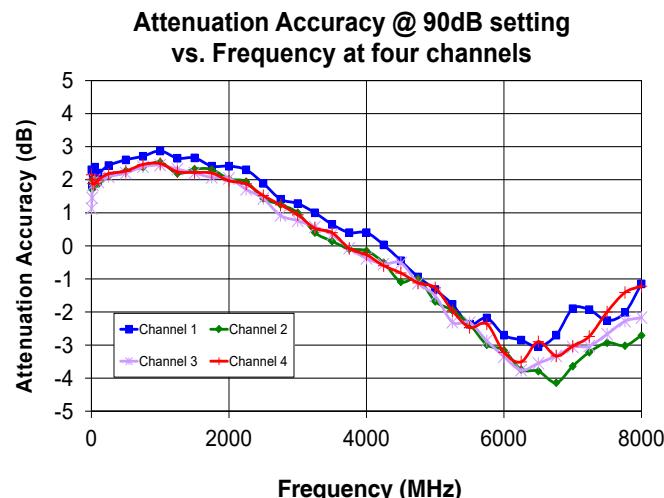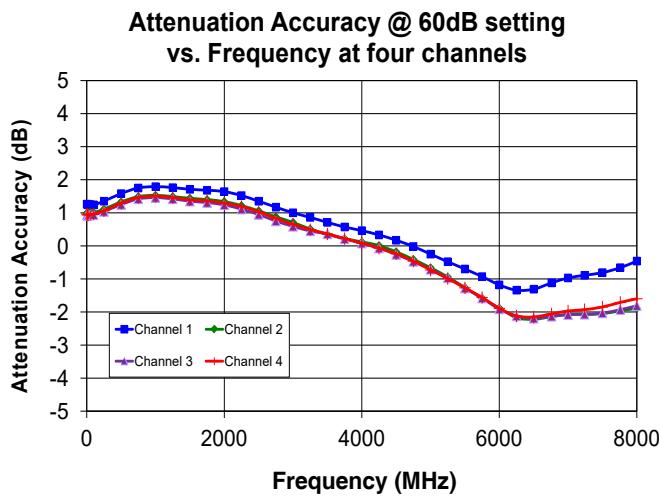

**Typical Performance Data\***

\*at +25°C unless noted otherwise

| FREQ.<br>(MHz) | Attenuation relative to I. Loss @ 0°C<br>(dB) |      |       |       |       |       |       |       |       | Attenuation relative to I. Loss @ +25°C<br>(dB) |      |       |       |       |       |       |       |       | Attenuation relative to I. Loss @ +50°C<br>(dB) |      |       |       |       |       |       |       |       |
|----------------|---|------|-------|-------|-------|-------|-------|-------|-------|---|------|-------|-------|-------|-------|-------|-------|-------|---|------|-------|-------|-------|-------|-------|-------|-------|
|                | @ Attenuation setting (dB)                    |      |       |       |       |       |       |       |       | @ Attenuation setting (dB)                      |      |       |       |       |       |       |       |       | @ Attenuation setting (dB)                      |      |       |       |       |       |       |       |       |
|                | 0.25  | 5    | 10    | 20    | 40    | 60    | 80    | 90    | 95    | 0.25  | 5    | 10    | 20    | 40    | 60    | 80    | 90    | 95    | 0.25  | 5    | 10    | 20    | 40    | 60    | 80    | 90    | 95    |
| 1              | 0.30  | 5.25 | 10.14 | 20.09 | 39.60 | 59.20 | 78.74 | 87.99 | 92.69 | 0.29  | 5.21 | 10.05 | 19.96 | 39.41 | 59.01 | 78.39 | 87.60 | 92.27 | 0.29  | 5.17 | 9.98  | 19.86 | 39.26 | 58.83 | 78.14 | 88.56 | 93.21 |
| 20             | 0.30  | 5.25 | 10.13 | 20.08 | 39.60 | 59.19 | 78.79 | 88.53 | 92.91 | 0.29  | 5.20 | 10.05 | 19.96 | 39.41 | 59.00 | 78.55 | 88.12 | 92.66 | 0.29  | 5.17 | 9.98  | 19.86 | 39.26 | 58.85 | 78.31 | 87.88 | 92.62 |
| 100            | 0.30  | 5.23 | 10.10 | 20.05 | 39.56 | 59.16 | 78.71 | 88.27 | 92.96 | 0.29  | 5.19 | 10.04 | 19.94 | 39.39 | 58.99 | 78.50 | 88.13 | 92.74 | 0.29  | 5.16 | 9.97  | 19.85 | 39.24 | 58.83 | 78.34 | 87.88 | 92.55 |
| 300            | 0.29  | 5.15 | 10.01 | 19.94 | 39.45 | 59.05 | 78.57 | 88.13 | 92.77 | 0.28  | 5.11 | 9.92  | 19.81 | 39.25 | 58.85 | 78.39 | 88.04 | 92.67 | 0.28  | 5.06 | 9.84  | 19.70 | 39.08 | 58.67 | 78.16 | 87.82 | 92.50 |
| 500            | 0.28  | 5.04 | 9.86  | 19.78 | 39.30 | 58.90 | 78.41 | 88.09 | 92.56 | 0.27  | 4.99 | 9.77  | 19.64 | 39.07 | 58.68 | 78.19 | 87.81 | 92.58 | 0.27  | 4.95 | 9.69  | 19.52 | 38.90 | 58.48 | 77.95 | 87.45 | 92.14 |
| 700            | 0.27  | 4.94 | 9.73  | 19.64 | 39.16 | 58.77 | 78.29 | 87.86 | 92.52 | 0.26  | 4.89 | 9.64  | 19.49 | 38.92 | 58.53 | 78.06 | 87.67 | 92.32 | 0.26  | 4.86 | 9.57  | 19.38 | 38.74 | 58.33 | 77.81 | 87.30 | 92.02 |
| 900            | 0.26  | 4.88 | 9.65  | 19.56 | 39.08 | 58.71 | 78.22 | 87.80 | 92.81 | 0.26  | 4.84 | 9.57  | 19.41 | 38.84 | 58.47 | 77.99 | 87.65 | 92.25 | 0.25  | 4.82 | 9.51  | 19.31 | 38.67 | 58.27 | 77.74 | 87.23 | 92.02 |
| 1000           | 0.26  | 4.87 | 9.64  | 19.55 | 39.08 | 58.71 | 78.27 | 87.76 | 92.81 | 0.26  | 4.84 | 9.56  | 19.40 | 38.84 | 58.47 | 78.01 | 87.68 | 92.20 | 0.25  | 4.82 | 9.51  | 19.30 | 38.67 | 58.26 | 77.75 | 87.43 | 92.11 |
| 1200           | 0.26  | 4.88 | 9.64  | 19.55 | 39.08 | 58.74 | 78.32 | 88.02 | 92.72 | 0.25  | 4.86 | 9.58  | 19.42 | 38.85 | 58.49 | 78.05 | 87.64 | 92.38 | 0.25  | 4.84 | 9.53  | 19.32 | 38.68 | 58.29 | 77.83 | 87.43 | 92.01 |
| 1400           | 0.26  | 4.90 | 9.66  | 19.57 | 39.12 | 58.79 | 78.38 | 87.93 | 92.68 | 0.25  | 4.88 | 9.60  | 19.44 | 38.89 | 58.54 | 78.11 | 87.74 | 92.55 | 0.25  | 4.87 | 9.55  | 19.34 | 38.72 | 58.34 | 77.86 | 87.47 | 92.10 |
| 1600           | 0.25  | 4.91 | 9.66  | 19.57 | 39.13 | 58.83 | 78.50 | 88.11 | 92.65 | 0.25  | 4.89 | 9.60  | 19.44 | 38.90 | 58.57 | 78.19 | 87.81 | 92.32 | 0.25  | 4.88 | 9.55  | 19.35 | 38.74 | 58.38 | 77.96 | 87.65 | 92.21 |
| 1800           | 0.25  | 4.91 | 9.65  | 19.56 | 39.14 | 58.86 | 78.53 | 88.22 | 93.04 | 0.25  | 4.89 | 9.58  | 19.43 | 38.91 | 58.61 | 78.19 | 87.73 | 92.68 | 0.25  | 4.87 | 9.54  | 19.35 | 38.75 | 58.42 | 78.09 | 87.66 | 92.38 |
| 2000           | 0.25  | 4.91 | 9.65  | 19.57 | 39.16 | 58.90 | 78.63 | 88.31 | 92.80 | 0.25  | 4.89 | 9.58  | 19.44 | 38.93 | 58.66 | 78.35 | 87.92 | 92.52 | 0.24  | 4.87 | 9.53  | 19.35 | 38.77 | 58.47 | 78.17 | 87.81 | 92.27 |
| 2100           | 0.25  | 4.92 | 9.66  | 19.58 | 39.18 | 58.94 | 78.64 | 88.31 | 93.01 | 0.25  | 4.90 | 9.59  | 19.45 | 38.95 | 58.70 | 78.46 | 88.11 | 92.96 | 0.24  | 4.87 | 9.53  | 19.35 | 38.79 | 58.52 | 78.22 | 87.85 | 92.61 |
| 2400           | 0.25  | 4.98 | 9.72  | 19.66 | 39.29 | 59.09 | 78.92 | 88.71 | 93.27 | 0.25  | 4.95 | 9.65  | 19.54 | 39.07 | 58.88 | 78.68 | 88.29 | 93.11 | 0.25  | 4.91 | 9.59  | 19.44 | 38.91 | 58.69 | 78.45 | 88.28 | 93.07 |
| 2700           | 0.26  | 5.06 | 9.82  | 19.79 | 39.45 | 59.33 | 79.23 | 89.06 | 93.85 | 0.26  | 5.01 | 9.73  | 19.65 | 39.21 | 59.09 | 78.97 | 88.51 | 93.64 | 0.25  | 4.99 | 9.69  | 19.59 | 39.10 | 58.95 | 78.88 | 88.42 | 93.19 |
| 3000           | 0.27  | 5.12 | 9.90  | 19.91 | 39.60 | 59.53 | 79.54 | 89.50 | 94.34 | 0.26  | 5.07 | 9.80  | 19.76 | 39.36 | 59.29 | 79.31 | 89.15 | 94.14 | 0.26  | 5.05 | 9.77  | 19.71 | 39.26 | 59.20 | 79.21 | 89.07 | 93.84 |
| 3300           | 0.27  | 5.13 | 9.92  | 19.97 | 39.70 | 59.68 | 79.85 | 89.73 | 94.37 | 0.27  | 5.10 | 9.85  | 19.85 | 39.49 | 59.52 | 79.66 | 89.48 | 94.17 | 0.27  | 5.06 | 9.79  | 19.75 | 39.34 | 59.38 | 79.45 | 89.40 | 94.16 |
| 3600           | 0.28  | 5.12 | 9.90  | 19.99 | 39.76 | 59.83 | 80.05 | 89.91 | 94.99 | 0.27  | 5.09 | 9.84  | 19.86 | 39.58 | 59.70 | 79.96 | 90.06 | 94.79 | 0.27  | 5.04 | 9.76  | 19.75 | 39.37 | 59.52 | 79.71 | 89.51 | 94.06 |
| 3900           | 0.27  | 5.10 | 9.87  | 20.00 | 39.82 | 59.98 | 80.31 | 90.57 | 94.99 | 0.27  | 5.05 | 9.79  | 19.86 | 39.60 | 59.84 | 80.19 | 90.24 | 95.19 | 0.27  | 5.02 | 9.74  | 19.76 | 39.42 | 59.67 | 80.05 | 90.05 | 94.49 |
| 4200           | 0.27  | 5.07 | 9.85  | 20.02 | 39.89 | 60.15 | 80.63 | 90.75 | 96.03 | 0.27  | 5.01 | 9.73  | 19.82 | 39.62 | 59.96 | 80.36 | 90.53 | 95.53 | 0.27  | 5.01 | 9.72  | 19.78 | 39.48 | 59.84 | 80.35 | 90.29 | 95.43 |
| 4500           | 0.27  | 5.06 | 9.84  | 20.06 | 39.99 | 60.38 | 81.01 | 90.96 | 95.81 | 0.26  | 5.03 | 9.74  | 19.87 | 39.71 | 60.18 | 80.87 | 90.98 | 96.09 | 0.27  | 5.00 | 9.72  | 19.81 | 39.56 | 60.05 | 80.71 | 90.78 | 95.80 |
| 4800           | 0.27  | 5.07 | 9.85  | 20.12 | 40.13 | 60.65 | 81.32 | 91.37 | 96.42 | 0.27  | 5.06 | 9.78  | 19.97 | 39.86 | 60.46 | 81.16 | 91.37 | 95.86 | 0.26  | 5.01 | 9.73  | 19.87 | 39.68 | 60.33 | 81.00 | 91.19 | 96.17 |
| 5100           | 0.27  | 5.08 | 9.87  | 20.20 | 40.28 | 60.96 | 81.69 | 91.67 | 96.56 | 0.27  | 5.05 | 9.81  | 20.07 | 40.01 | 60.76 | 81.61 | 92.01 | 97.00 | 0.26  | 5.02 | 9.75  | 19.95 | 39.84 | 60.63 | 81.50 | 91.55 | 96.96 |
| 5400           | 0.27  | 5.08 | 9.89  | 20.28 | 40.45 | 61.25 | 81.99 | 91.91 | 97.34 | 0.27  | 5.06 | 9.86  | 20.19 | 40.23 | 61.13 | 82.00 | 92.13 | 97.18 | 0.26  | 5.02 | 9.77  | 20.03 | 40.01 | 60.97 | 81.86 | 91.93 | 97.78 |
| 5700           | 0.28  | 5.11 | 9.94  | 20.38 | 40.65 | 61.58 | 82.40 | 92.80 | 97.20 | 0.27  | 5.09 | 9.92  | 20.30 | 40.46 | 61.52 | 82.44 | 92.47 | 97.80 | 0.27  | 5.05 | 9.82  | 20.15 | 40.22 | 61.34 | 82.50 | 92.27 | 97.02 |
| 6000           | 0.29  | 5.18 | 10.04 | 20.54 | 40.89 | 61.93 | 82.77 | 93.35 | 98.19 | 0.28  | 5.16 | 10.03 | 20.47 | 40.73 | 61.88 | 82.84 | 92.87 | 98.59 | 0.28  | 5.13 | 9.95  | 20.33 | 40.48 | 61.74 | 82.80 | 93.22 | 98.26 |
| 6300           | 0.31  | 5.24 | 10.15 | 20.68 | 41.08 | 62.16 | 83.09 | 93.16 | 98.10 | 0.30  | 5.23 | 10.14 | 20.62 | 40.94 | 62.21 | 83.22 | 93.65 | 98.66 | 0.30  | 5.18 | 10.03 | 20.45 | 40.65 | 62.03 | 83.19 | 93.39 | 97.98 |
| 6600           | 0.31  | 5.19 | 10.10 | 20.63 | 41.08 | 62.17 | 83.08 | 93.54 | 98.82 | 0.31  | 5.16 | 10.05 | 20.53 | 40.90 | 62.19 | 83.24 | 93.85 | 98.56 | 0.31  | 5.11 | 9.95  | 20.37 | 40.62 | 62.03 | 83.19 | 93.12 | 98.25 |
| 6900           | 0.31  | 5.15 | 10.05 | 20.58 | 41.05 | 62.08 | 82.99 | 93.25 | 98.69 | 0.30  | 5.11 | 9.99  | 20.46 | 40.85 | 62.08 | 83.17 | 93.49 | 99.07 | 0.30  | 5.08 | 9.91  | 20.33 | 40.60 | 62.02 | 83.06 | 93.29 | 98.75 |
| 7200           | 0.30  | 5.17 | 10.06 | 20.61 | 41.12 | 62.02 | 82.76 | 92.97 | 98.79 | 0.29  | 5.14 | 10.01 | 20.49 | 40.91 | 62.06 | 83.02 | 93.15 | 98.69 | 0.29  | 5.11 | 9.94  | 20.39 | 40.69 | 62.06 | 83.10 | 93.07 | 98.91 |
| 7500           | 0.29  | 5.21 | 10.10 | 20.69 | 41.22 | 61.98 | 82.48 | 92.70 | 97.22 | 0.29  | 5.19 | 10.05 | 20.57 | 41.00 | 62.05 | 82.93 | 93.01 | 97.66 | 0.29  | 5.16 | 9.99  | 20.47 | 40.81 | 62.06 | 82.92 | 93.10 | 97.88 |
| 7800           | 0.30  | 5.24 | 10.12 | 20.75 | 41.28 | 61.86 | 82.09 | 92.13 | 97.21 | 0.29  | 5.22 | 10.07 | 20.63 | 41.05 | 61.94 | 82.53 | 92.86 | 97.10 | 0.29  | 5.19 | 10.02 | 20.54 | 40.88 | 61.99 | 82.69 | 93.04 | 97.59 |
| 8000           | 0.31  | 5.29 | 10.17 | 20.83 | 41.34 | 61.81 | 81.82 | 91.87 | 97.64 | 0.30  | 5.27 | 10.12 | 20.71 | 41.11 | 61.89 | 82.31 | 92.58 | 96.88 | 0.30  | 5.24 | 10.07 | 20.62 | 40.94 | 61.94 | 82.47 | 93.05 | 97.10 |



**Typical Performance Data(Continued)\***

\*at +25°C unless noted otherwise

| FREQ.<br>(MHz) | Insertion<br>Loss<br>(dB) |       |       | VSWR In<br>(:1)            |      |      |      |      |      |      |      |      |      | VSWR Out<br>(:1)           |      |      |      |      |      |      |      |      |      |      |      |
|----------------|---------------------------|-------|-------|----------------------------|------|------|------|------|------|------|------|------|------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|
|                |                           |       |       | @ Attenuation setting (dB) |      |      |      |      |      |      |      |      |      | @ Attenuation setting (dB) |      |      |      |      |      |      |      |      |      |      |      |
|                | 0°C                       | 25°C  | 50°C  | 0                          | 0.25 | 1    | 5    | 10   | 20   | 40   | 60   | 80   | 90   | 95                         | 0    | 0.25 | 1    | 5    | 10   | 20   | 40   | 60   | 80   | 90   | 95   |
| 1              | 2.59                      | 2.73  | 2.85  | 1.70                       | 1.66 | 1.54 | 1.36 | 1.18 | 1.12 | 1.05 | 1.04 | 1.11 | 1.10 | 1.12                       | 1.70 | 1.66 | 1.61 | 1.29 | 1.19 | 1.02 | 1.08 | 1.02 | 1.05 | 1.08 | 1.09 |
| 20             | 2.61                      | 2.76  | 2.87  | 1.69                       | 1.65 | 1.54 | 1.36 | 1.18 | 1.12 | 1.04 | 1.03 | 1.10 | 1.10 | 1.11                       | 1.70 | 1.65 | 1.61 | 1.29 | 1.19 | 1.01 | 1.08 | 1.01 | 1.05 | 1.07 | 1.08 |
| 100            | 2.73                      | 2.86  | 2.96  | 1.67                       | 1.64 | 1.53 | 1.35 | 1.17 | 1.12 | 1.04 | 1.03 | 1.10 | 1.09 | 1.11                       | 1.68 | 1.64 | 1.59 | 1.29 | 1.19 | 1.01 | 1.07 | 1.01 | 1.04 | 1.07 | 1.08 |
| 300            | 2.98                      | 3.14  | 3.27  | 1.54                       | 1.51 | 1.43 | 1.30 | 1.16 | 1.11 | 1.04 | 1.03 | 1.10 | 1.09 | 1.11                       | 1.58 | 1.55 | 1.51 | 1.26 | 1.18 | 1.02 | 1.07 | 1.02 | 1.04 | 1.06 | 1.07 |
| 500            | 3.26                      | 3.45  | 3.60  | 1.38                       | 1.36 | 1.30 | 1.23 | 1.13 | 1.10 | 1.03 | 1.04 | 1.10 | 1.10 | 1.11                       | 1.43 | 1.41 | 1.40 | 1.21 | 1.17 | 1.03 | 1.06 | 1.03 | 1.04 | 1.06 | 1.07 |
| 700            | 3.52                      | 3.74  | 3.89  | 1.22                       | 1.21 | 1.17 | 1.17 | 1.10 | 1.09 | 1.03 | 1.04 | 1.10 | 1.10 | 1.11                       | 1.27 | 1.26 | 1.26 | 1.17 | 1.16 | 1.04 | 1.06 | 1.04 | 1.04 | 1.05 | 1.06 |
| 900            | 3.72                      | 3.96  | 4.10  | 1.09                       | 1.09 | 1.07 | 1.12 | 1.08 | 1.08 | 1.02 | 1.04 | 1.11 | 1.11 | 1.12                       | 1.13 | 1.12 | 1.15 | 1.15 | 1.17 | 1.05 | 1.05 | 1.04 | 1.04 | 1.05 | 1.06 |
| 1000           | 3.80                      | 4.03  | 4.18  | 1.05                       | 1.04 | 1.04 | 1.11 | 1.07 | 1.07 | 1.02 | 1.04 | 1.11 | 1.11 | 1.12                       | 1.08 | 1.08 | 1.11 | 1.15 | 1.17 | 1.05 | 1.05 | 1.05 | 1.04 | 1.05 | 1.05 |
| 1200           | 3.91                      | 4.16  | 4.31  | 1.04                       | 1.04 | 1.07 | 1.10 | 1.06 | 1.07 | 1.02 | 1.05 | 1.11 | 1.12 | 1.12                       | 1.11 | 1.12 | 1.13 | 1.19 | 1.19 | 1.06 | 1.04 | 1.06 | 1.05 | 1.05 | 1.05 |
| 1400           | 4.03                      | 4.29  | 4.43  | 1.09                       | 1.09 | 1.11 | 1.11 | 1.06 | 1.07 | 1.03 | 1.05 | 1.12 | 1.12 | 1.13                       | 1.18 | 1.19 | 1.17 | 1.22 | 1.22 | 1.07 | 1.04 | 1.06 | 1.05 | 1.04 | 1.04 |
| 1600           | 4.17                      | 4.44  | 4.57  | 1.12                       | 1.12 | 1.14 | 1.12 | 1.07 | 1.08 | 1.04 | 1.06 | 1.12 | 1.13 | 1.13                       | 1.20 | 1.20 | 1.18 | 1.23 | 1.23 | 1.07 | 1.04 | 1.06 | 1.05 | 1.04 | 1.04 |
| 1800           | 4.32                      | 4.60  | 4.72  | 1.11                       | 1.12 | 1.14 | 1.12 | 1.08 | 1.09 | 1.06 | 1.06 | 1.12 | 1.13 | 1.13                       | 1.15 | 1.16 | 1.14 | 1.21 | 1.22 | 1.08 | 1.03 | 1.07 | 1.05 | 1.04 | 1.04 |
| 2000           | 4.46                      | 4.76  | 4.87  | 1.08                       | 1.09 | 1.11 | 1.11 | 1.09 | 1.11 | 1.07 | 1.07 | 1.12 | 1.13 | 1.13                       | 1.07 | 1.08 | 1.08 | 1.19 | 1.22 | 1.08 | 1.03 | 1.07 | 1.06 | 1.05 | 1.04 |
| 2100           | 4.53                      | 4.83  | 4.94  | 1.07                       | 1.08 | 1.10 | 1.12 | 1.10 | 1.12 | 1.08 | 1.07 | 1.11 | 1.13 | 1.13                       | 1.05 | 1.06 | 1.06 | 1.18 | 1.22 | 1.09 | 1.04 | 1.07 | 1.06 | 1.05 | 1.04 |
| 2400           | 4.69                      | 5.01  | 5.09  | 1.15                       | 1.15 | 1.14 | 1.17 | 1.14 | 1.16 | 1.11 | 1.08 | 1.11 | 1.13 | 1.12                       | 1.17 | 1.17 | 1.17 | 1.20 | 1.22 | 1.10 | 1.04 | 1.08 | 1.06 | 1.05 | 1.04 |
| 2700           | 4.81                      | 5.19  | 5.20  | 1.34                       | 1.33 | 1.30 | 1.27 | 1.20 | 1.20 | 1.13 | 1.09 | 1.09 | 1.12 | 1.10                       | 1.34 | 1.33 | 1.32 | 1.25 | 1.24 | 1.11 | 1.05 | 1.08 | 1.07 | 1.06 | 1.04 |
| 3000           | 4.97                      | 5.40  | 5.35  | 1.50                       | 1.49 | 1.44 | 1.37 | 1.26 | 1.24 | 1.16 | 1.10 | 1.07 | 1.10 | 1.08                       | 1.48 | 1.46 | 1.45 | 1.31 | 1.26 | 1.12 | 1.05 | 1.09 | 1.07 | 1.06 | 1.05 |
| 3300           | 5.20                      | 5.65  | 5.61  | 1.53                       | 1.51 | 1.47 | 1.41 | 1.29 | 1.27 | 1.17 | 1.12 | 1.06 | 1.07 | 1.05                       | 1.56 | 1.54 | 1.53 | 1.34 | 1.28 | 1.13 | 1.06 | 1.09 | 1.08 | 1.07 | 1.05 |
| 3600           | 5.48                      | 5.98  | 5.92  | 1.42                       | 1.40 | 1.39 | 1.39 | 1.28 | 1.28 | 1.19 | 1.14 | 1.06 | 1.05 | 1.05                       | 1.51 | 1.48 | 1.49 | 1.32 | 1.28 | 1.13 | 1.06 | 1.08 | 1.07 | 1.07 | 1.06 |
| 3900           | 5.77                      | 6.41  | 6.24  | 1.25                       | 1.25 | 1.27 | 1.32 | 1.26 | 1.29 | 1.21 | 1.17 | 1.09 | 1.06 | 1.08                       | 1.30 | 1.28 | 1.31 | 1.25 | 1.26 | 1.12 | 1.06 | 1.07 | 1.06 | 1.06 | 1.06 |
| 4200           | 6.07                      | 6.89  | 6.57  | 1.19                       | 1.20 | 1.22 | 1.27 | 1.25 | 1.30 | 1.24 | 1.21 | 1.15 | 1.11 | 1.14                       | 1.18 | 1.18 | 1.20 | 1.22 | 1.25 | 1.12 | 1.06 | 1.04 | 1.05 | 1.05 | 1.05 |
| 4500           | 6.34                      | 7.33  | 6.86  | 1.28                       | 1.29 | 1.28 | 1.27 | 1.26 | 1.31 | 1.27 | 1.25 | 1.21 | 1.18 | 1.21                       | 1.20 | 1.20 | 1.19 | 1.23 | 1.24 | 1.11 | 1.06 | 1.03 | 1.03 | 1.03 | 1.05 |
| 4800           | 6.59                      | 7.69  | 7.13  | 1.35                       | 1.35 | 1.33 | 1.29 | 1.29 | 1.32 | 1.31 | 1.30 | 1.29 | 1.25 | 1.28                       | 1.12 | 1.13 | 1.12 | 1.19 | 1.21 | 1.10 | 1.07 | 1.06 | 1.06 | 1.05 | 1.07 |
| 5100           | 6.81                      | 7.95  | 7.34  | 1.33                       | 1.33 | 1.31 | 1.29 | 1.31 | 1.33 | 1.36 | 1.35 | 1.36 | 1.33 | 1.35                       | 1.12 | 1.13 | 1.11 | 1.16 | 1.17 | 1.08 | 1.10 | 1.12 | 1.11 | 1.09 | 1.10 |
| 5400           | 7.03                      | 8.01  | 7.54  | 1.29                       | 1.28 | 1.28 | 1.29 | 1.31 | 1.33 | 1.39 | 1.39 | 1.43 | 1.40 | 1.42                       | 1.09 | 1.10 | 1.09 | 1.11 | 1.09 | 1.06 | 1.14 | 1.19 | 1.18 | 1.15 | 1.15 |
| 5700           | 7.22                      | 8.01  | 7.71  | 1.31                       | 1.30 | 1.29 | 1.29 | 1.31 | 1.33 | 1.43 | 1.43 | 1.50 | 1.49 | 1.50                       | 1.05 | 1.04 | 1.05 | 1.03 | 1.03 | 1.09 | 1.19 | 1.26 | 1.25 | 1.21 | 1.20 |
| 6000           | 7.37                      | 8.00  | 7.84  | 1.25                       | 1.24 | 1.26 | 1.27 | 1.31 | 1.34 | 1.47 | 1.47 | 1.58 | 1.58 | 1.58                       | 1.02 | 1.01 | 1.01 | 1.09 | 1.12 | 1.17 | 1.24 | 1.33 | 1.32 | 1.28 | 1.26 |
| 6300           | 7.57                      | 8.09  | 8.07  | 1.18                       | 1.19 | 1.21 | 1.25 | 1.33 | 1.36 | 1.51 | 1.52 | 1.66 | 1.68 | 1.66                       | 1.19 | 1.21 | 1.19 | 1.25 | 1.25 | 1.28 | 1.31 | 1.40 | 1.39 | 1.36 | 1.32 |
| 6600           | 8.04                      | 8.55  | 8.63  | 1.36                       | 1.37 | 1.35 | 1.32 | 1.39 | 1.39 | 1.55 | 1.56 | 1.75 | 1.78 | 1.74                       | 1.54 | 1.54 | 1.51 | 1.47 | 1.42 | 1.40 | 1.37 | 1.45 | 1.44 | 1.43 | 1.38 |
| 6900           | 8.43                      | 8.94  | 9.05  | 1.47                       | 1.47 | 1.45 | 1.40 | 1.45 | 1.42 | 1.58 | 1.59 | 1.81 | 1.86 | 1.80                       | 1.65 | 1.64 | 1.63 | 1.58 | 1.51 | 1.47 | 1.41 | 1.47 | 1.47 | 1.48 | 1.42 |
| 7200           | 8.82                      | 9.31  | 9.46  | 1.51                       | 1.50 | 1.49 | 1.48 | 1.50 | 1.45 | 1.60 | 1.62 | 1.86 | 1.92 | 1.86                       | 1.62 | 1.62 | 1.63 | 1.61 | 1.58 | 1.52 | 1.45 | 1.47 | 1.49 | 1.51 | 1.45 |
| 7500           | 9.20                      | 9.68  | 9.87  | 1.57                       | 1.56 | 1.56 | 1.58 | 1.57 | 1.49 | 1.61 | 1.63 | 1.90 | 1.98 | 1.90                       | 1.64 | 1.63 | 1.65 | 1.62 | 1.60 | 1.54 | 1.47 | 1.44 | 1.48 | 1.53 | 1.46 |
| 7800           | 9.66                      | 10.11 | 10.33 | 1.73                       | 1.72 | 1.73 | 1.74 | 1.67 | 1.57 | 1.62 | 1.64 | 1.92 | 2.01 | 1.92                       | 1.73 | 1.71 | 1.71 | 1.63 | 1.62 | 1.53 | 1.46 | 1.39 | 1.45 | 1.52 | 1.46 |
| 8000           | 9.96                      | 10.39 | 10.62 | 1.83                       | 1.82 | 1.84 | 1.85 | 1.75 | 1.63 | 1.62 | 1.64 | 1.92 | 2.02 | 1.92                       | 1.71 | 1.68 | 1.68 | 1.61 | 1.61 | 1.52 | 1.46 | 1.35 | 1.42 | 1.51 | 1.45 |

**Software & Documentation Download:**


- Mini-Circuits' full software and support package including user guide, Windows GUI, DLL files, programming manual and examples can be downloaded free of charge from <http://www.minicircuits.com/softwaredownload/patt.html>
- Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support

**Minimum System Requirements**

| Parameter           | Requirements  |  |
|---------------------|---|--|
| Interface           | USB HID or HTTP Get/Post or Telnet protocols or SSH protocols |  |
| System requirements | GUI:  | Windows 32 & 64 bit systems from Windows 98 up to Windows 10                                 |
|                     | USB API (ActiveX & .Net)                                      | Windows 32 & 64 bit systems with ActiveX or .Net support from Windows 98 up to Windows 10    |
|                     | USB direct programming support                                | Linux, Windows systems from Windows 98 up to Windows 10                                      |
|                     | HTTP, Telnet or SSH   | Any computer with a network port and Ethernet-TCP/IP (HTTP, Telnet or SSH protocols) support |
| Hardware            | Pentium® II or higher, RAM 256 MB                             |  |

**Graphical User Interface (GUI) for Windows****Key Features:**

- Manual attenuation setting
- Sweep and Hop attenuation sequences directed from the PC, or entire sequence loaded into RC4DAT.
- Attenuator address configuration and Firmware upgrade
- Attenuation at power up may be set to selected attenuation level or last attenuation state recorded.
- USB, HTTP or Telnet control of RC4DAT
- Setting Ethernet configuration

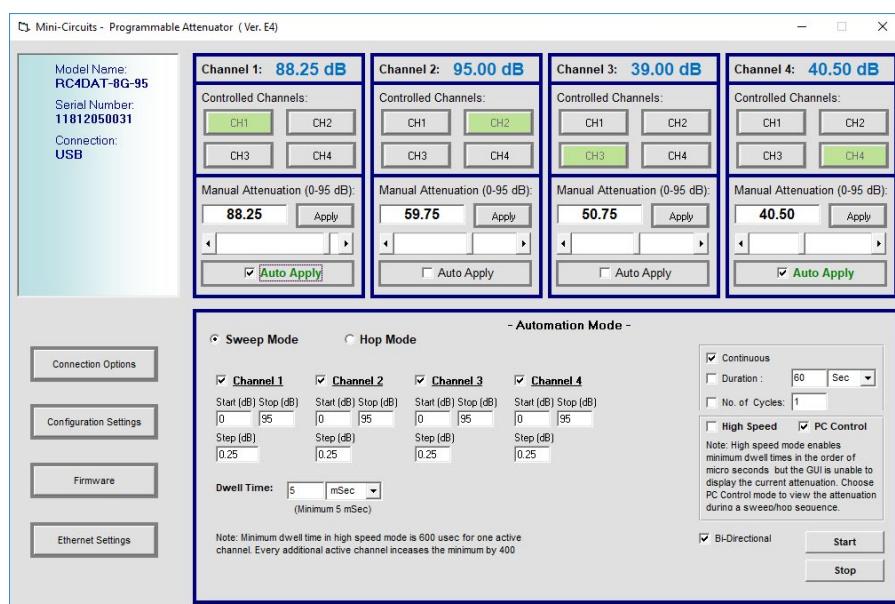**Application Programming Interface (API)**

Programming manual: [https://www.minicircuits.com/softwaredownload/Prog\\_Manual-6-Programmable\\_Attenuator.pdf](https://www.minicircuits.com/softwaredownload/Prog_Manual-6-Programmable_Attenuator.pdf)

**Windows Support:**

- API DLL files exposing the full switch functionality
  - ActiveX COM DLL file for creation of 32-bit programs
  - .Net library DLL file for creation of 32 / 64-bit programs
- Supported by most common programming environments (refer to application note [AN-49-001](#) for summary of tested environments)

**Linux Support:**

- Full attenuator control in a Linux environment is achieved by way of USB interrupt commands.

**Ordering Information**

| Model        | Description                                       |
|--------------|---|
| RC4DAT-8G-95 | USB/Ethernet four channel Programmable Attenuator |

| Included Accessories  | Part No.      | Description  |
|---|---------------|--|
|  | USB-CBL-AC-3+ | 3.3 ft (1.0 m) USB Cable: USB type A(Male) to USB type C(Male) |

| Optional Accessories | Description   |
|----------------------|---|
| USB-AC/DC-5          | AC/DC 5V <sub>DC</sub> Power Adapter with US, EU, IL, UK, AUS, and China power plugs <sup>13,14</sup>   |
| USB-CBL-AC-3+        | 3.3 ft (1.0 m) USB Cable: USB type A(Male) to USB type C(Male)  |
| CBL-RJ45-MM-5+       | 5 ft (1.5 m) Ethernet cable: RJ45(Male) to RJ45(Male) Cat 5E cable  |
| BKT-355-02+          | Bracket kit including 3.75" x 5.17" bracket, mounting screws and washers  |
| RKT-RC4DAT-2         | Rack-mounting bracket (19" width, 1U height) for up to 2 x RC4DAT-8G-95, including all required accessories for mounting within a rack cabinet.<br>Please contact <a href="mailto:testsolutions@minicircuits.com">testsolutions@minicircuits.com</a> for details. |



<sup>13</sup> The USB-AC/DC-5 may be used to provide the 5V<sub>DC</sub> power input via USB port if operating the RC4DAT with Ethernet control. Not required if using USB control.

<sup>14</sup> Power plugs for other countries are also available, if you need a power plug for a country not listed please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

**Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)