# Surface Mount Diplexer

**RDP-2R15+** 

**50**O DC to 2150 MHz (DC-20, 950-2150 MHz)

## **The Big Deal**

- Low insertion loss
- · High stopband insertion loss
- Miniature shielded package



CASE STYLE: CK605

## **Product Overview**

RDP-2R15+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 20 MHz and high pass port is designed for 950 to 2150 MHz. This diplexer can be used to pass, IF, pilot carrier or clock synchronizing signal, SATCOM modems, air-traffic control and other multiband radio systems.

## **Key Features**

Feature	Advantages		
Low passband insertion loss	Suitable for high performance application.		
Extended stopband rejection	Spurious rejection and avoids using additional filters.		
Shielded case.	Reduced interference with the surrounding components.		



IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard Terms?; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

# Surface Mount Diplexer

#### DC to 2150 MHz (DC-20, 950-2150 MHz) 50Ω


## **Maximum Ratings**

Operating Temperature	-40°C to 85°C					
Storage Temperature	-55°C to 100°C					
RF Power Input 2W at 25°C						
Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation						

## **Pin Connections**


HIGH PASS PORT	14
LOW PASS PORT	10
COMMON PORT	2
GROUND	1,3-9,11-13,15,16

## **Outline Drawing**

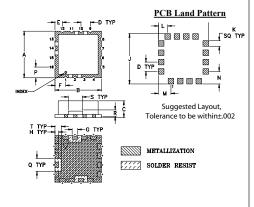

## Outline Dimensions (<sup>inch</sup><sub>mm</sub>)

Α	-	-	-			-		J	
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060
12.7	12.7	4.572	2.54	2.032	2.921	1.524	1.016	13.72 1	.524
L	M	N	Р	Q	R	S	т		wt.
-				Q .140		-			wt. rams
.100	.135	.135	.115	_	.070	.150	.070	gi	



### TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER WATERNLAS TRACE WIDTH WAY NEED TO BE MODIFIED. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. NOTES: 1. 2. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- Low insertion loss
- 50Ω Impedance
- · Combination of Low pass and High pass filters
- Miniature shielded package
- · Aqueous washable

## **Applications**

- SATCOM modem
- · Air-traffic control



**RDP-2R15+** 

Generic photo used for illustration purposes only CASE STYLE: CK605

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Electrical Specifications at 25°C

Par	ameter	Port Frequency (MHz)		Min.	Тур.	Max.	Unit
			Trequency (iiiiiz)		.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	maxi	01111
	Insertion Loss	Low Pass	DC-20	-	0.5	1.5	dB
		High Pass	950-2150	-	0.6	1.5	uD
	Flatness	High pass	950-2150	-	± 0.1	-	dB
Pass Band	Return Loss	Low Pass	DC-20	12	18	-	
		High Pass	950-2150	15	21	-	dB
		Common	DC-20	15	20	-	
			950-2150	15	20	-	
Stop Band Isolation		Low Pass	70-2150	20	30	-	dB
			950-2150	40	58	-	ub
			DC-250	20	32	-	dB
		High Pass	DC-20	-	86	-	uв

## Typical Performance Data at 25°C

FREQUENCY (MHz)		ON LOSS B)	RETURN LOSS (dB)			
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port	
1	0.22	108.92	32.17	31.85	0.00	
10	0.28	96.23	32.40	23.23	0.00	
20	0.46	87.25	20.50	17.94	0.01	
30	0.77	89.86	17.14	15.42	0.02	
40	5.78	86.18	2.56	2.32	0.03	
50	15.23	79.32	0.71	0.68	0.04	
60	23.43	76.90	0.42	0.46	0.06	
70	30.25	74.57	0.31	0.38	0.08	
100	45.94	67.00	0.18	0.26	0.17	
140	61.39	55.91	0.13	0.17	0.33	
250	73.23	31.77	0.18	0.09	1.00	
330	66.27	19.46	0.34	0.08	1.63	
420	59.77	8.74	1.18	0.07	2.80	
480	56.65	3.86	3.35	0.07	4.83	
520	55.69	2.00	6.15	0.08	7.32	
540	55.54	1.44	7.93	0.08	8.85	
600	55.91	0.67	14.06	0.08	13.76	
800	58.07	0.43	19.22	0.11	21.91	
950	59.29	0.39	20.06	0.13	26.85	
1000	59.25	0.38	20.75	0.14	29.18	
1500	62.06	0.36	30.83	0.21	28.00	
2150	58.86	0.46	21.58	0.28	28.15	

## **Functional Schematic**






For detailed performance specs & shopping online see web site


ISO 9001 ISO 14001 AS 9100 CERTIFIED P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine IF/RF MICROWAVE COMPONENTS

REV.OR M133609 EDU1494 RDP-2R15+ URJ 200501 Page 2 of 3


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's and terms and conditions (collective), "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.


# **Performance Charts**

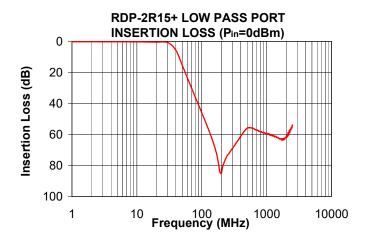

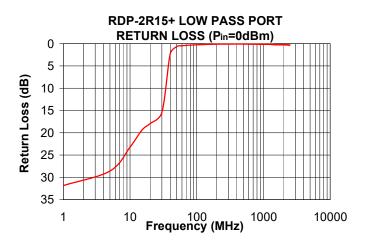

**RDP-2R15+ HIGH PASS PORT INSERTION LOSS (Pin=0dBm)** 0 20 Insertion Loss (dB) 40 60 80 100 120 Frequency (MHz) 1000 10000 1 10

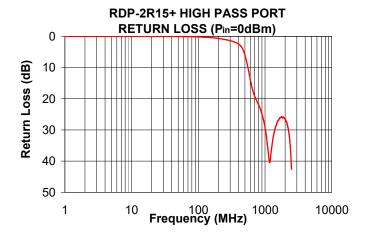

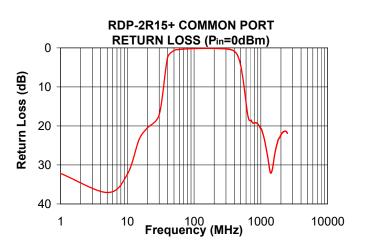

For detailed performance specs & shopping online see web site

ISO 9001 ISO 14001 AS 9100 CERTIFIED P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard Terms?; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

**/lini-Circuits**