

Surface Mount Frequency Mixer

RMS-42MH+

Level 13 (LO Power +13 dBm) 800 to 4200 MHz



Generic photo used for illustration purposes only

CASE STYLE: TT240

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6


Features

- wide frequency range, 800-4200 MHz
- conversion loss, 5.3 dB typ.
- small size, 0.25"x0.31"x0.2"

Applications

- satellite communications
- receivers/transmitters


Outline Drawing

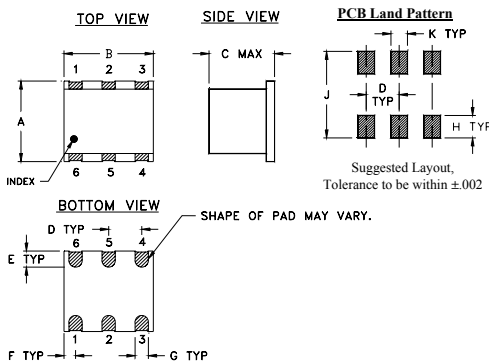

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

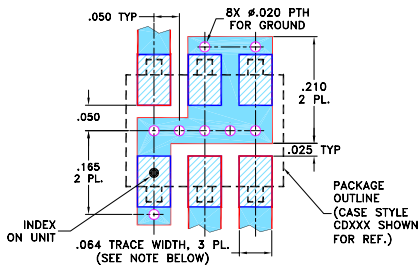

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
		L	U	L	U	
800-4200	DC-800	Typ.	Min.	Typ.	Min.	Typ.
		35	25	28	17	18


1 dB COMP: +9 dBm typ.
For phase detection, DC output positive with in-phase RF & LO.

L = 800-2100MHz
m = 1000-2000MHz
U = 2100-4200MHz

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
10.00	40.00	7.94	20.28	2.29	2.30
20.00	50.00	7.65	27.98	1.39	1.76
200.00	170.00	7.32	31.88	1.38	1.54
295.00	265.00	7.53	32.40	1.48	1.47
500.00	470.00	7.77	31.96	1.65	1.42
722.50	692.50	7.70	32.05	1.88	1.42
1000.00	970.00	7.67	32.59	2.09	1.45
1150.00	1120.00	7.63	32.84	2.18	1.37
1435.00	1405.00	6.82	35.06	2.18	1.47
1577.50	1547.50	7.65	34.54	2.08	1.58
1862.50	1832.50	7.75	36.03	2.74	1.73
2005.00	1975.00	8.44	34.15	2.05	1.95
2290.00	2260.00	8.70	30.53	30.66	2.44
2500.00	2470.00	8.40	31.06	30.74	2.78
2717.50	2687.50	8.50	29.50	31.68	3.21
3000.00	2970.00	8.07	33.65	32.53	3.16
3145.00	3115.00	7.62	33.58	31.08	3.37
3500.00	3470.00	7.57	32.49	26.48	3.33
3857.50	3827.50	7.73	28.41	24.34	2.13
4200.00	4170.00	8.84	29.31	25.00	1.19







Electrical Schematic

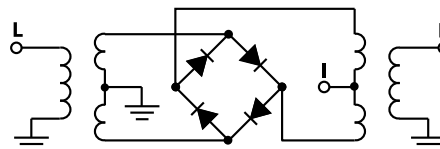

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
RMS-42MH+
200815
Page 1 of 2

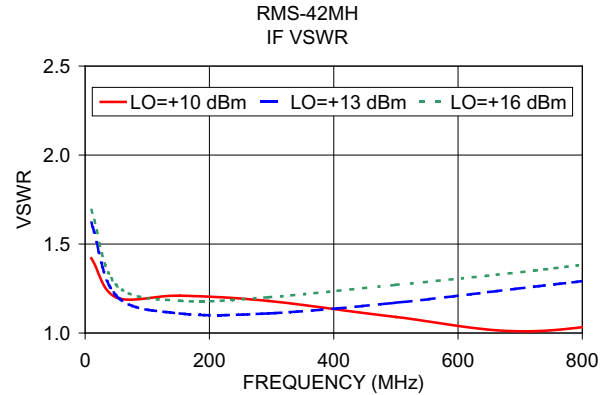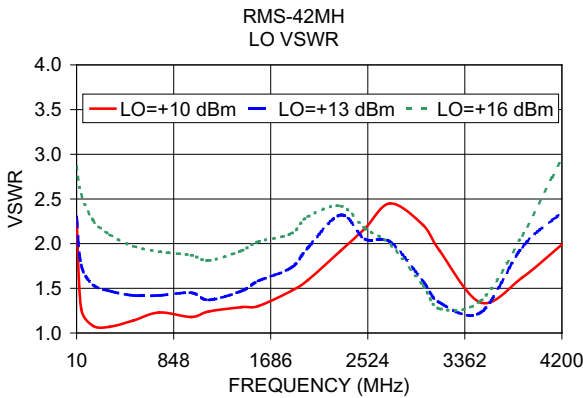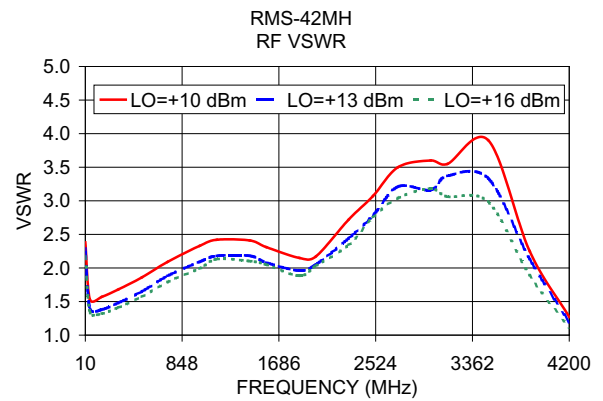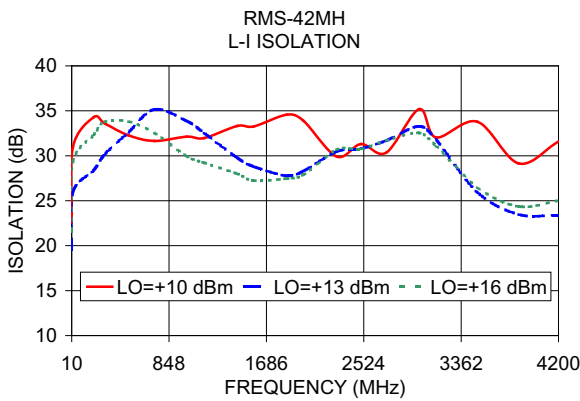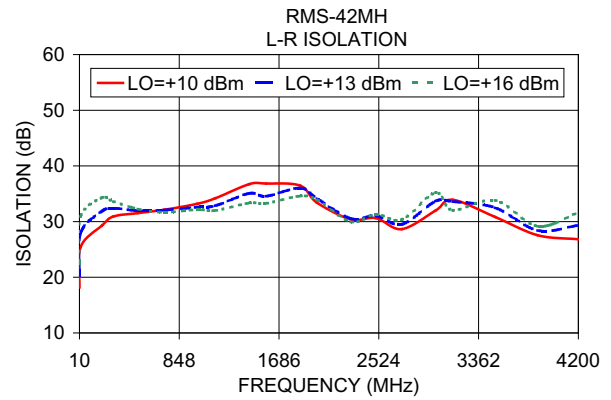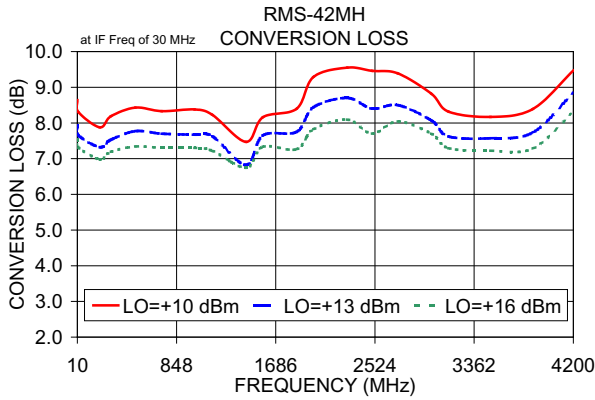

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

