

## Surface Mount Voltage Controlled Oscillator

### ROS-1600PV+

5V Tuning for PLL ICs 1520 to 1600 MHz



Generic photo used for illustration purposes only  
CASE STYLE: CK605

#### Features

- supply voltage, 5V
- tuning voltage, 5V
- linear tuning, 25-38 MHz/V typ.
- low phase noise, -100 dBc/Hz at 10 kHz offset, typ.
- aqueous washable

#### Applications

- PCS
- CDMA
- PLL circuitry

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### Electrical Specifications

FREQUENCY (MHz)	POWER OUTPUT (dBm)	TUNING VOLTAGE (V)	PHASE NOISE (dBc/Hz)				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER			
			SSB at offset frequencies: Typ.							Typ.	Max.		Voltage (V)	Current (mA)		
Min.	Max.	Typ.	Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Max.	Max.			
1520	1600	7	0.5	5.0	-75	-100	-120	-140	10	3.0	25-38	-26	-16	1.0	5	25

#### Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

#### Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+6V
Absolute Max. Tuning Voltage (Vtune)	+6V

all specifications: 50 ohm system  
Permanent damage may occur if any of these limits are exceeded.

#### Outline Drawing

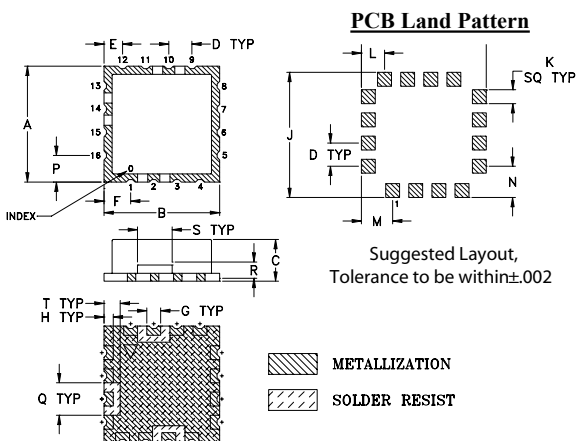

#### Demo Board MCL PIN: TB-10 Suggested PCB Layout (PL-012)

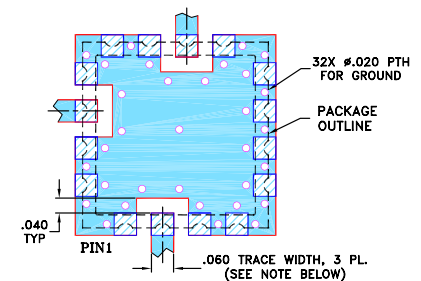

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

#### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)





# NON-CATALOG

## Performance Data & Curves


## ROS-1600PV+

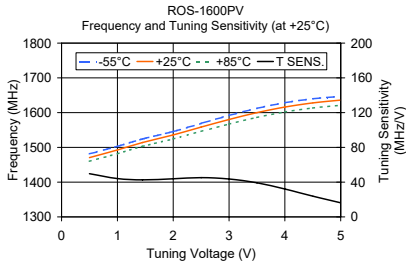

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
0.50	49.70	1481.38	1470.62	1460.02	4.36	6.65	8.06
1.00	44.10	1503.13	1492.65	1481.95	4.40	6.75	7.91
1.45	42.60	1524.32	1513.92	1503.01	4.59	6.73	7.83
2.00	43.90	1545.66	1535.90	1524.43	5.01	7.16	7.93
2.50	45.20	1569.15	1558.52	1546.12	5.07	7.50	8.43
3.00	43.60	1592.01	1580.33	1567.14	5.42	7.51	8.57
3.50	39.30	1612.34	1600.00	1586.13	5.74	8.03	8.86
4.00	32.10	1628.52	1616.05	1601.77	5.84	8.24	9.16
4.50	23.90	1639.88	1627.97	1613.35	5.90	8.41	9.36
5.00	16.20	1646.98	1636.06	1621.15	5.94	8.45	9.40

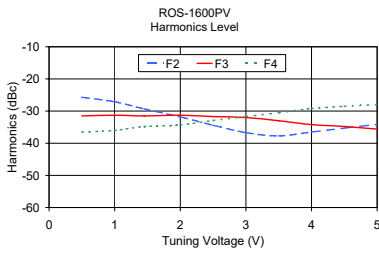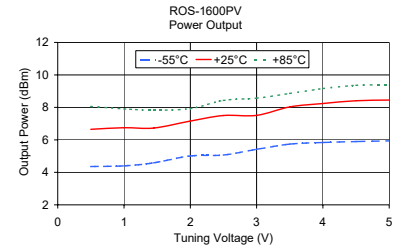

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
0.50	-25.70	-31.50	-36.50	1.82
1.00	-27.10	-31.30	-36.00	2.46
1.45	-29.30	-31.50	-34.80	2.98
2.00	-31.80	-31.30	-34.30	3.33
2.50	-34.40	-31.70	-32.90	3.33
3.00	-36.70	-32.00	-31.70	2.90
3.50	-37.70	-33.00	-30.50	2.31
4.00	-36.50	-34.20	-29.20	2.22
4.50	-35.30	-34.80	-28.50	2.92
5.00	-34.10	-35.60	-28.00	4.02

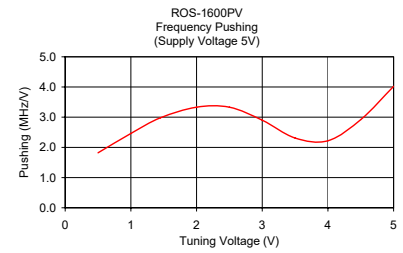

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)