

Surface Mount, Micro-Miniature NON-CATALOG Power Splitter/Combiner SBTC-2-22-75+

2 Way-0° 75Ω 500 to 2150 MHz

Features

- low insertion loss, 1.5 dB typ.
- excellent isolation 25 dB typ.
- very good phase unbalance, 1 deg. typ.
- small size, 0.166" x 0.150" x 0.155"
- temperature stable LTCC base
- small size
- low cost
- aqueous washable
- protected by US patent 6,963,255

For Model
with Leads see
SBTC-2-22-75L+



Generic photo used for illustration purposes only
CASE STYLE: AT790

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000, 2000

Applications

- internet over satellite modems
- VSAT
- L-Band

Electrical Specifications

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		500		2150	MHz
Insertion Loss Above 3.0 dB	500 - 2150	—	1.9	2.5	dB
	700 - 1500	—	0.9	1.6	
	950 - 2150	—	1.9	2.5	
Isolation	500 - 2150	16	28	—	dB
	700 - 1500	16	28	—	
	950 - 2150	16	25	—	
Phase Unbalance	500 - 2150	—	2	7	Degree
	700 - 1500	—	1	4	
	950 - 2150	—	2	7	
Amplitude Unbalance	500 - 2150	—	0.7	1.2	dB
	700 - 1500	—	0.4	0.8	
	950 - 2150	—	0.7	1.2	
VSWR (Port-S)	500 - 2150	—	1.8	2.2	:1
	700 - 1500	—	1.2	1.5	
	950 - 2150	—	1.8	2.2	
VSWR (Port 1-2)	500 - 2150	—	1.4	2.2	:1
	700 - 1500	—	1.2	1.6	
	950 - 2150	—	1.4	2.2	

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

Function	Pin Number
SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1,2
NOT USED	5


Electrical Schematic



NON-CATALOG

SBTC-2-22-75+


Outline Drawing

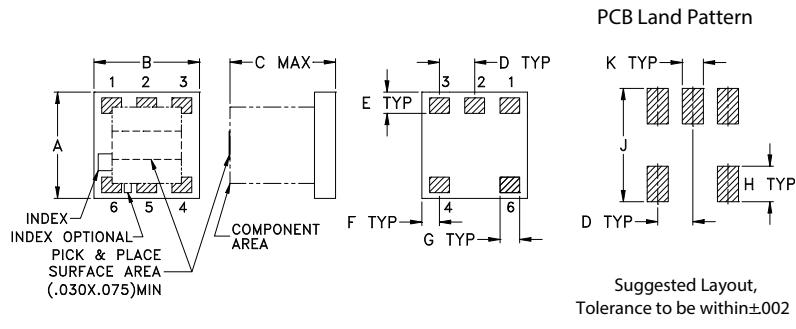

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	wt
.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	grams
3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	0.10

**Demo Board MCL P/N: TB-277
Suggested PCB Layout (PL-153)**

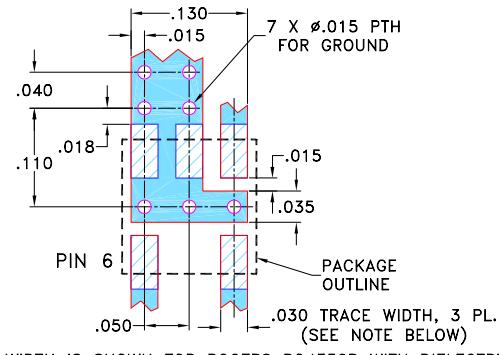

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500	4.13	3.56	0.57	22.55	1.86	1.11	1.65	1.51
600	3.97	3.49	0.48	25.60	0.96	1.08	1.50	1.40
800	3.88	3.46	0.42	40.69	0.05	1.08	1.30	1.27
950	3.85	3.54	0.31	39.45	0.38	1.10	1.20	1.21
1200	3.85	3.71	0.14	30.18	0.29	1.09	1.07	1.17
1300	3.86	3.80	0.05	30.46	0.36	1.11	1.04	1.18
1400	3.85	3.91	0.06	30.33	0.40	1.14	1.04	1.21
1600	3.86	4.11	0.25	26.30	0.53	1.25	1.13	1.30
1800	3.93	4.31	0.38	22.77	0.72	1.54	1.32	1.48
2000	4.15	4.67	0.52	25.59	0.20	1.78	1.55	1.71
2100	4.22	4.83	0.61	28.68	0.41	1.84	1.64	1.81
2110	4.22	4.84	0.62	28.05	0.45	1.85	1.65	1.82
2120	4.22	4.85	0.63	27.82	0.48	1.85	1.67	1.83
2130	4.21	4.85	0.64	27.98	0.51	1.86	1.68	1.85
2150	4.22	4.87	0.65	29.51	0.62	1.88	1.70	1.88

1. Total Loss = Insertion Loss + 3dB splitter loss.

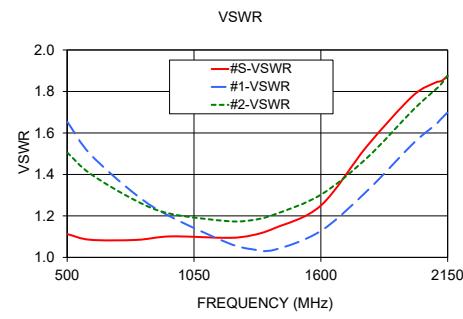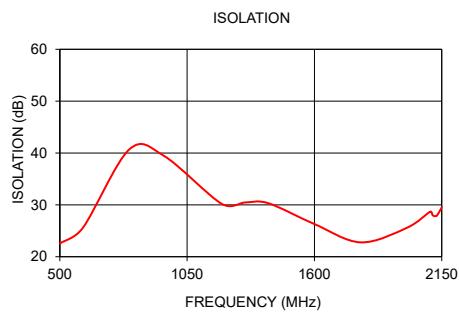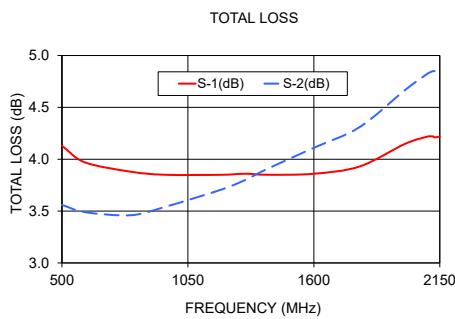

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Page 2 of 2