

DC Pass, High Power


Bi-Directional Coupler

SCBD-28-82HP+

50Ω Up to 100W 600 to 820 MHz

The Big Deal

- High power handling, 100W
- Very low mainline loss, 0.1 dB
- High directivity, 23 dB
- Excellent return loss, 30 dB (input/output/coupling)



CASE STYLE: JB1233-1

Product Overview

Mini-Circuits' SCBD-16-562HP+ surface-mount bi-directional coupler provides high-power handling up to 75W, low mainline loss and good input and output return loss over wideband. Covering frequencies from 2700 to 5600 MHz, this model supports a wide variety of applications from cellular and ISM to defense communications and more. The coupler is designed into an open printed laminate (0.70 x 0.32 x 0.20") with wrap-around terminations for good solderability and easy visual inspection.

Key Features

Feature	Advantages
Low mainline loss, 0.1 dB	Provides excellent through-path signal power transmission.
Good coupling flatness, 28 ±1.3 dB	SCBD-28-82HP+ provides consistent coupling performance across its full specified operating frequency range.
High directivity, 23 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
Excellent return loss, 30 dB (input/output/coupling)	Provides excellent matching for 50Ω systems and minimal signal reflection.
High power handling, 100W	Usable in systems with a wide range of high-power requirements.
DC current passing up to 2A	Suitable for use in systems where DC power is needed through the RF line.

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



DC Pass, High Power Bi-Directional Coupler

SCBD-28-82HP+

50Ω Up to 100W 600 to 820 MHz



Generic photo used for illustration purposes only

CASE STYLE: JB1233-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size 13" Devices/Reel 500

Maximum Ratings

Operating Temperature, case -55°C to 85°C

Storage Temperature -55°C to 100°C

DC Current 2A

*Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

INPUT 1,2,3,4

OUTPUT 2,1,4,3


COUPLED IN 4,3,2,1

COUPLED OUT 3,4,1,2

GROUND 5

Product Marking: SCBD-01+

Outline Drawing

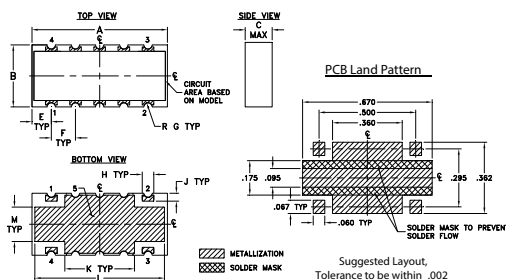


Outline Dimensions (inch mm)

A	B	C	E	F	G
.70	.32	.14	.100	.125	.022
17.78	8.13	3.56	2.54	3.18	0.56
H	J	K	L	M	wt
.060	.040	.360	.670	.175	grams
1.52	1.02	9.14	17.02	4.45	0.80

Demo Board MCL P/N: TB-774+

Suggested PCB Layout (PL-423)**

** Wraparound solder on ground pins may not be shown

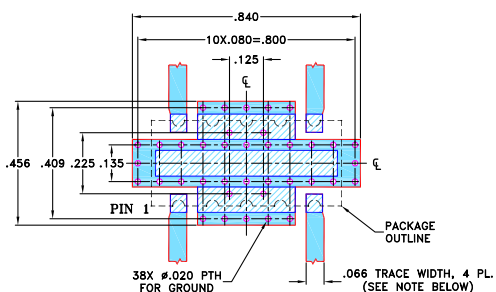

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030"±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wide frequency range, 600 to 820 MHz
- high directivity, 23 dB typ.
- good return loss
- high power, up to 100W
- DC current pass through input to output

Applications

- VHF / UHF
- SMR


Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		600		820	MHz
Mainline Loss ¹	600-820	—	0.1	0.2	dB
Coupling	600-820	—	28.0±1.3	—	dB
Coupling Flatness (±)	600-820	—	1.3	1.6	dB
Directivity	600-820	20	23	—	dB
Return Loss (Input)	600-820	20	30	—	dB
Return Loss (Output)	600-820	20	30	—	dB
Return Loss (Coupling)	600-820	20	30	—	dB
Input Power ² (up to +65°C case temp.)	600-820	—	—	100	W
Input Power (up to +85°C case temp.)	600-820	—	—	64	

1. Include coupling loss.

2. At 65°C with no DC. Derate linearly to 50W at 65°C with 2A DC current.

Electrical Schematic

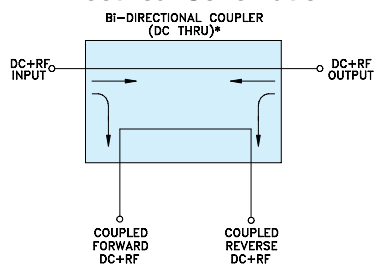

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
ECO-002026
ED-16374
SCBD-28-82HP+
WP/CP/AM
200302
Page 2 of 3

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
600	0.05	29.21	29.19	23.68	23.83	34.47	33.87	32.02	36.89
620	0.05	28.93	28.91	23.78	24.06	34.07	33.47	31.90	36.59
630	0.05	28.80	28.77	23.78	24.20	33.63	33.20	31.76	36.21
650	0.05	28.53	28.51	23.82	24.37	32.98	32.83	31.66	35.78
670	0.05	28.28	28.25	23.84	24.31	32.19	32.47	31.48	35.25
680	0.05	28.15	28.13	23.80	24.20	31.73	32.18	31.31	34.85
700	0.06	27.91	27.88	23.70	23.88	31.10	31.76	30.95	34.06
720	0.06	27.67	27.64	23.61	23.64	30.75	31.35	30.84	33.52
730	0.06	27.55	27.53	23.59	23.47	30.56	31.08	30.75	33.21
750	0.06	27.32	27.30	23.52	23.31	30.43	30.68	30.67	32.82
770	0.06	27.11	27.08	23.53	23.36	30.54	30.37	30.43	32.57
780	0.06	27.00	26.97	23.56	23.43	30.54	30.19	30.28	32.40
800	0.06	26.79	26.76	23.60	23.64	30.59	29.96	30.18	32.32
810	0.06	26.68	26.66	23.66	23.76	30.49	29.84	30.18	32.40
820	0.06	26.58	26.56	23.66	23.86	30.34	29.66	30.12	32.24

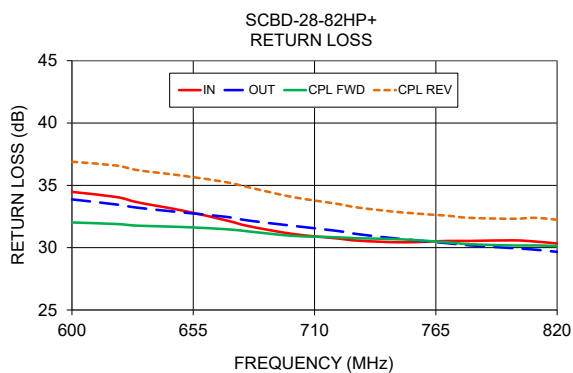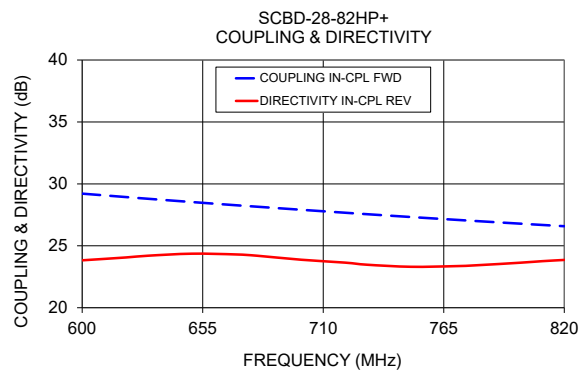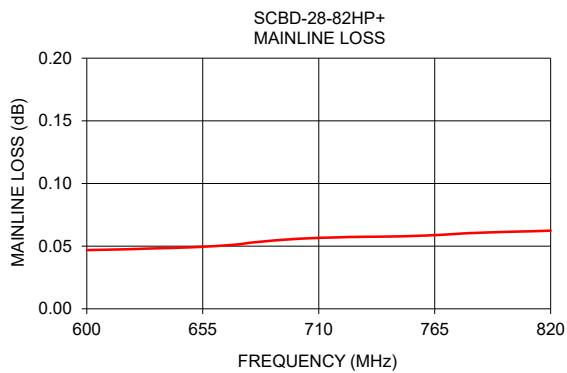

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

