


2 Way-0° 50Ω

0.1 to 400 MHz



CASE STYLE: YY101

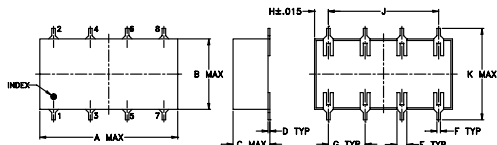

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

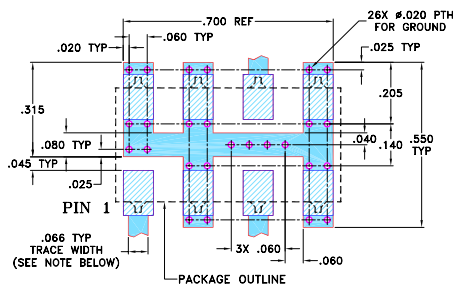
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8

Outline Drawing**PCB Land Pattern****Outline Dimensions (inch)**

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

**Demo Board MCL P/N: TB-50+
Suggested PCB Layout (PL-060)**

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 0.1 to 400 MHz
- low insertion loss, 0.2 dB typ.
- good isolation, 30 dB typ.
- good amplitude unbalance, 0.05 dB typ.

Applications

- VHF/UHF
- instrumentation
- communication receivers & transmitters

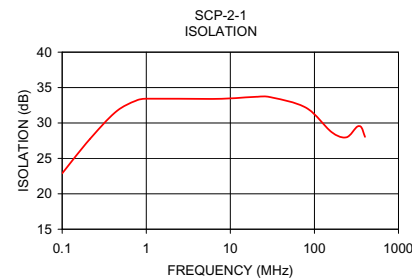
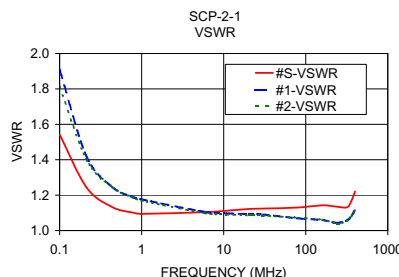
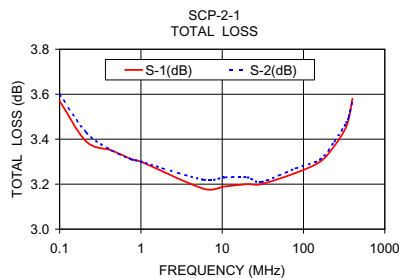
Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _L -f _U	25	15	30	20	25	20	0.3	1.2	0.2	0.6	0.4	1.1	2.0	2.0	3.0	0.15	0.2	0.3

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]**Typical Performance Data**

Frequency (MHz)	Total Loss ¹ (dB) S-1	Total Loss ¹ (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
0.10	3.57	3.60	0.03	22.88	0.28	1.54	1.91	1.81
0.21	3.39	3.43	0.03	27.70	0.11	1.24	1.42	1.40
0.44	3.35	3.35	0.01	31.60	0.08	1.13	1.25	1.25
0.78	3.31	3.31	0.01	33.21	0.09	1.10	1.19	1.19
1.00	3.30	3.30	0.01	33.43	0.06	1.09	1.18	1.17
5.88	3.18	3.22	0.04	33.40	0.20	1.10	1.11	1.10
10.75	3.19	3.23	0.04	33.49	0.18	1.11	1.10	1.09
20.50	3.20	3.23	0.04	33.70	0.03	1.12	1.09	1.09
30.25	3.20	3.21	0.01	33.64	0.11	1.12	1.09	1.08
80.00	3.25	3.27	0.02	32.14	0.02	1.13	1.07	1.07
160.00	3.30	3.31	0.02	28.71	0.12	1.14	1.06	1.06
240.00	3.37	3.39	0.02	27.98	0.10	1.13	1.04	1.04
320.00	3.44	3.46	0.02	29.46	0.15	1.13	1.06	1.06
360.00	3.49	3.50	0.00	29.42	0.29	1.17	1.08	1.08
400.00	3.58	3.57	0.01	28.04	0.34	1.22	1.11	1.13

1. Total Loss = Insertion Loss + 3dB splitter loss.

**electrical schematic****Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp