

Band Pass Filter

SXBP-EDU2580

Surface Mount

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

HF1139


ELECTRICAL SPECIFICATIONS 75Ω @ +25°C

Parameter	Min.	Typ.	Max.	Units
Passband (Loss < 2 dB)	5		42	MHz
Centre frequency		23		MHz
Low Band (Loss > 30 dB)	0.3	1		MHz
High Band (Loss > 20 dB)		54	58	MHz
High Band (Loss > 30 dB)		58	74	MHz
High Band (Loss > 40 dB)		74	300	MHz
High Band (Loss > 30 dB)		300	3000	MHz
Passband VSWR		1.3	1.67	(:1)
Stopband VSWR		20		(:1)

Functional Schematic

MAXIMUM RATINGS

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W

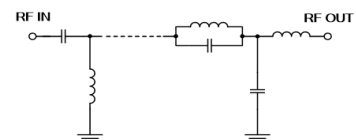

PIN CONNECTIONS

Input	1
Output	8
Ground	2,3,4,5,6,7

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

REV. X1
SXBP-EDU2580
URJ
170121
Page 1 of 1