



## SURFACE MOUNT

# Bi-Directional Coupler

## SYDC-30-12HP+

50Ω 30 dB Coupling 20 to 100 MHz 55 Watt

### FEATURES

- High power handling, 55 Watt max.
- Low mainline loss, 0.06 dB typ.
- Good return loss, 36 dB typ.



CASE STYLE: AH202-1

Generic photo used for illustration purposes only

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Military mobile
- ISM

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		20	—	100	MHz
Mainline Loss <sup>1</sup>	20-100	—	0.06	0.15	dB
Nominal Coupling	20-100	—	29±1.0	—	dB
Coupling Flatness(±)	20-100	—	±0.6	—	dB
Directivity	20-100	20	30	—	dB
Return Loss	20-100	—	36	—	dB
Input Power <sup>2</sup>	20-100	—	—	55	W

1. Mainline loss includes theoretical power loss at coupled port.


2. The user must provide adequate means of heat removal to limit the temperature of ground connections 2,3,6,7 to 85°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 35°C/W or less when the unit is driven at maximum specified RF input power, 15W. At higher ambient temperature, with the same heat sink. Input power in watts must not exceed 55W x (85°C - T<sub>AMBIENT</sub>) ÷ 60°C.

### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C Case*
Storage Temperature	-55°C to 100°C

\* Case temperature is defined as temperature on ground leads. Permanent damage may occur if any of these limits are exceeded.

### ELECTRICAL SCHEMATIC

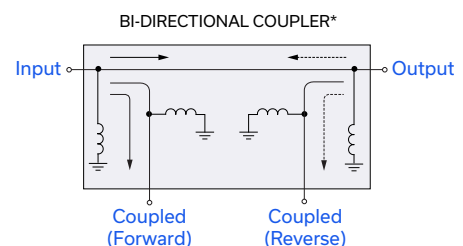

\*Electrical schematic is for Bi-Directional coupler with internal transformer(s) that routes DC from all ports to ground



# SURFACE MOUNT

# Bi-Directional Coupler

# SYDC-30-12HP+

Mini-Circuits

50Ω 30 dB Coupling 20 to 100 MHz 55 Watt


### PAD CONNECTIONS

INPUT	8
OUTPUT	1
COUPLED (FORWARD)	5
COUPLED (REVERSE)	4
GROUND	2, 3, 6, 7

**\*PRODUCT MARKING:** SYDC-30-12HP

\*Marking may contain other features or characters for internal lot control

### SUGGESTED PCB LAYOUT (PL-246)

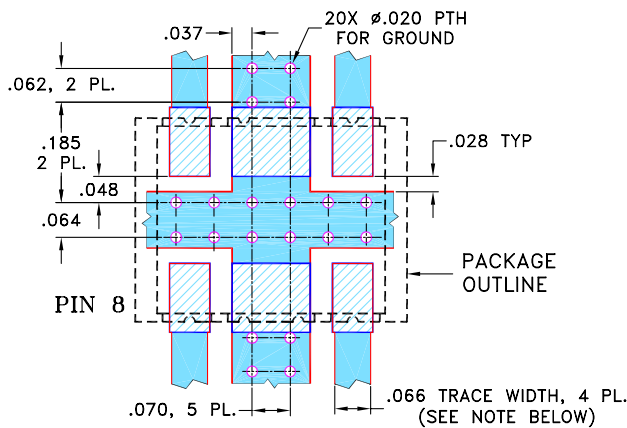


#### NOTES:


- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### OUTLINE DRAWING

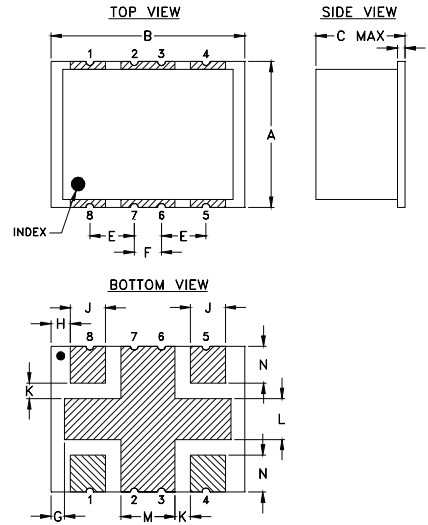

### PCB Land Pattern



Suggested Layout, Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G
.38	.50	.25	.020	.115	.070	.035
9.65	12.70	6.35	0.51	2.92	1.78	0.89
H	J	K	L	M	N	wt
.050	.090	.040	.105	.140	.095	grams
1.27	2.29	1.02	2.67	3.56	2.41	0.80

### TAPE & REEL INFORMATION: F61



**SURFACE MOUNT**

# Bi-Directional Coupler




**SYDC-30-12HP+**



50Ω 30 dB Coupling 20 to 100 MHz 55 Watt

**TYPICAL PERFORMANCE DATA**

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
		In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd
20.00	0.03	28.77	28.68	34.36	34.57	43.29	43.43	42.84	42.98
25.00	0.03	28.77	28.65	34.50	34.77	43.14	43.18	42.62	42.84
30.00	0.03	28.78	28.63	34.45	35.02	42.72	42.67	42.24	42.38
40.00	0.04	28.77	28.59	33.21	33.96	41.56	41.51	41.32	41.40
50.00	0.05	28.74	28.54	31.95	33.03	40.43	40.34	40.52	40.52
60.00	0.05	28.70	28.50	30.23	31.37	39.42	39.36	39.72	39.67
70.00	0.05	28.64	28.43	29.23	30.09	38.43	38.41	38.95	38.91
80.00	0.06	28.58	28.33	28.40	28.71	37.54	37.56	38.12	38.12
82.00	0.06	28.57	28.31	28.06	28.56	37.36	37.40	37.96	37.97
84.00	0.06	28.55	28.29	27.70	28.22	37.17	37.24	37.80	37.82
86.00	0.06	28.54	28.27	27.56	28.01	37.01	37.07	37.61	37.62
88.00	0.06	28.52	28.26	27.50	27.77	36.83	36.92	37.45	37.47
90.00	0.06	28.50	28.23	27.11	27.58	36.66	36.78	37.28	37.30
100.00	0.07	28.42	28.11	26.17	26.65	35.84	36.02	36.37	36.45

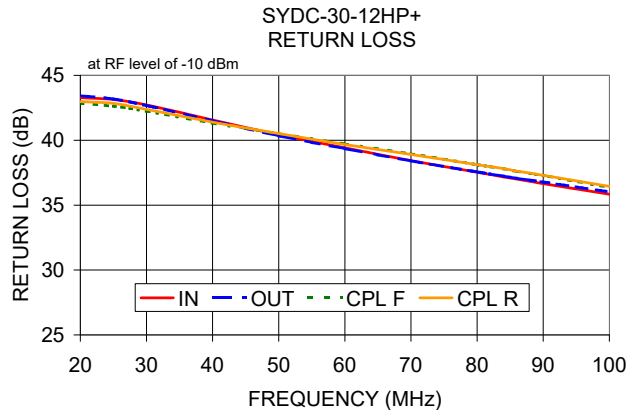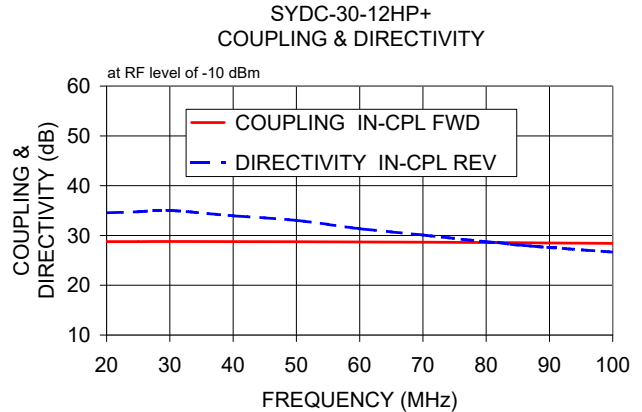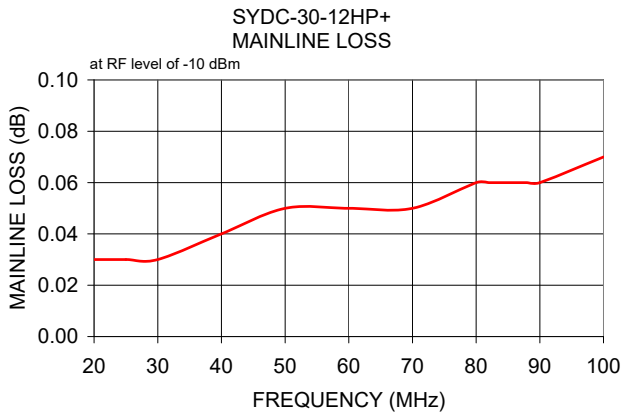

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

