

# **SURFACE MOUNT**

# RF Transformer

TC1-1T+

 $50\Omega$  0.4 to 500 MHz

## **FEATURES**

- Usable over 0.4-500 MHz
- Excellent amplitude unbalance, 0.1 dB typ. and phase unbalance, 2 deg typ. in 1 dB bandwidth
- Good return loss
- Plastic base with leads
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

# +RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

# **APPLICATIONS**

- VHF/UHF receivers/transmitters
- Push-pull amplifiers

## **ELECTRICAL SPECIFICATIONS AT +25°C**

Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit	
Impedance Ratio			1			
Frequency Range		0.4		500	MHz	
Insertion Loss*	04-500		3			
	0.5-300		2		dB	
	1-100		1			
Phase Unbalance	1-100		2		Deg.	
	0.5-300		5			
Amplitude Unbalance	1-100		0.1		dB	
	0.5-300		0.6			


<sup>\*</sup> Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

## **MAXIMUM RATINGS**

Parameter	Ratings		
Operating Temperature	-40°C to 85°C		
Storage Temperature	-55°C to 100°C		
RF Power	0.25W		
DC Current	30mA		

Permanent damage may occur if any of these limits are exceeded.

# **CONFIG. A**



REV. G ECO-021646 TC1-1T+ MCL NY 240424





# **SURFACE MOUNT**

# RF Transformer

TC1-1T+


 $50\Omega$  0.4 to 500 MHz

## **PIN CONNECTIONS**


Function	Pin Number	
PRIMARY DOT	6	
PRIMARY	4	
SECONDARY DOT	1	
SECONDARY	3	
SECONDARY CT	2	
NOT USED	5	

**PRODUCT MARKING: N/A** 

## **OUTLINE DRAWING**

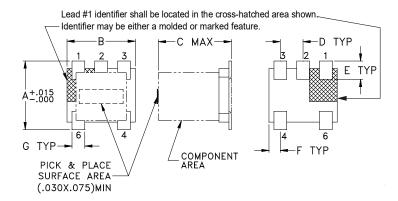

**PCB Land Pattern** 




Suggested Layout, Tolerance to be within±.002

# OUTLINE DIMENSIONS (Inch )

F	Е	D	С	В	Α
.025	.040	.050	.160	.150	.150
0.64	1.02	1.27	4.06	3.81	3.81
		K		Н	G
wt		• •	J	• • •	•
grams		.030	.190	.065	.028
0.15		0.76	4.83	1.65	0.71

**TAPE & REEL INFORMATION: F17** 



# RF Transformer


TC1-1T+

 $50\Omega$  0.4 to 500 MHz

#### **TYPICAL PERFORMANCE DATA**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
0.30	0.88	15.46	0.06	0.03
1.00	0.57	21.01	0.04	0.05
5.00	0.33	27.35	0.02	0.01
10.00	0.32	28.55	0.02	0.15
50.00	0.40	23.46	0.02	0.63
100.00	0.51	18.34	0.06	1.24
200.00	0.78	13.01	0.21	2.57
300.00	1.10	10.06	0.47	3.99
400.00	1.46	8.16	0.82	5.66
500.00	1.84	6.90	1.26	7.50



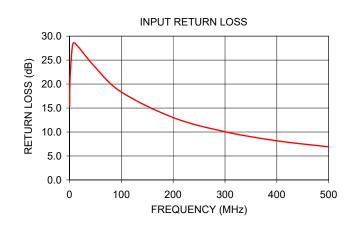

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

