

Mini-Circuits®

BALANCED TO UNBALANCED



RF Transformer

TC1-1T-152X-1+

50 Ω 5 to 1500 MHz Ratio 1:1

FEATURES

- Suitable for tin/lead and RoHS solder systems
- Wideband, 5 to 1500 MHz
- Balanced transmission line
- Excellent phase unbalance, 1.5° typ
- Excellent amplitude unbalance, 0.2 dB typ.
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT1521

APPLICATIONS

- VHF/UHF transmitters
- Cellular
- GPS
- Communication

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio			1		
Frequency Range		5	—	1500	MHz
Insertion Loss*	5-870	—	1.0	1.6	dB
	870-1000	—	1.2	1.7	
	1000-1500	—	1.8	2.5	
Amplitude Unbalance	5-870	—	0.1	0.7	dB
	870-1000	—	0.3	0.9	
	1000-1500	—	0.5	1.8	
Phase Unbalance	5-870	—	1.0	6	Degree
	870-1000	—	2.0	8	
	1000-1500	—	3.0	10	
Common mode rejection	5-1000	22	33	—	dB
	1000-1500	20	28	—	
Input Return Loss	5-870	—	15	—	dB
	870-1000	—	12	—	


* Insertion Loss is referenced to mid-band loss, 0.7 dB typ.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5W
DC Current	200mA

Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION M1

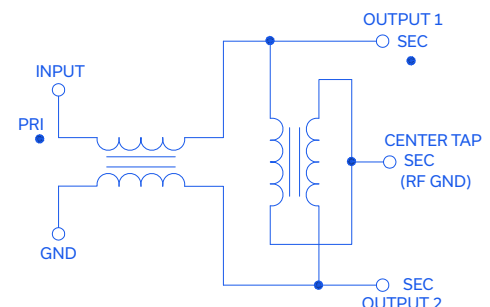


Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-021735
TC1-1T-152X-1+
MCL NY
240503

PAGE 1 OF 3



Mini-Circuits

BALANCED TO UNBALANCED



RF Transformer

TC1-1T-152X-1+


50 Ω 5 to 1500 MHz Ratio 1:1

PIN CONNECTIONS

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2


PRODUCT MARKING: WH

OUTLINE DRAWING

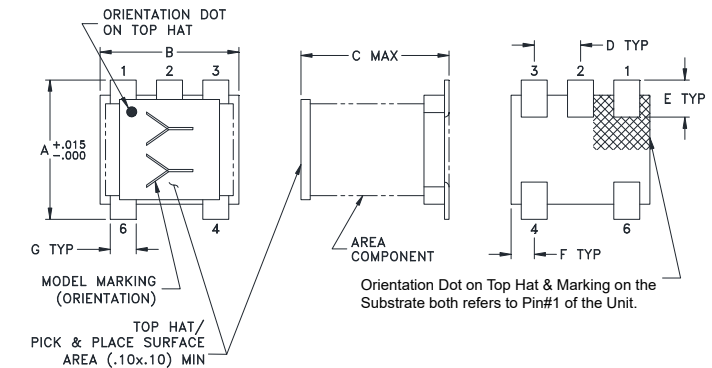

Top-hat total thickness: .013 inches MAX.

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76

Weight: 0.15 grams

TAPE & REEL INFORMATION: F17





Mini-Circuits

BALANCED TO UNBALANCED





RF Transformer

TC1-1T-152X-1+

50 Ω 5 to 1500 MHz Ratio 1:1

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)	CMRR (dB)
5	0.79	21.59	0.00	0.00	77.68
10	0.71	24.37	0.00	0.06	65.55
100	0.73	24.80	0.02	0.64	44.93
200	0.77	21.92	0.05	1.25	38.91
400	0.87	17.73	0.11	1.80	35.39
600	0.98	15.25	0.04	2.27	34.01
800	1.14	13.56	0.05	2.86	32.01
1000	1.32	12.43	0.24	3.05	30.47
1200	1.54	11.48	0.47	3.23	28.19
1400	1.79	10.65	0.70	3.24	26.17
1500	1.92	10.27	0.81	3.16	25.34

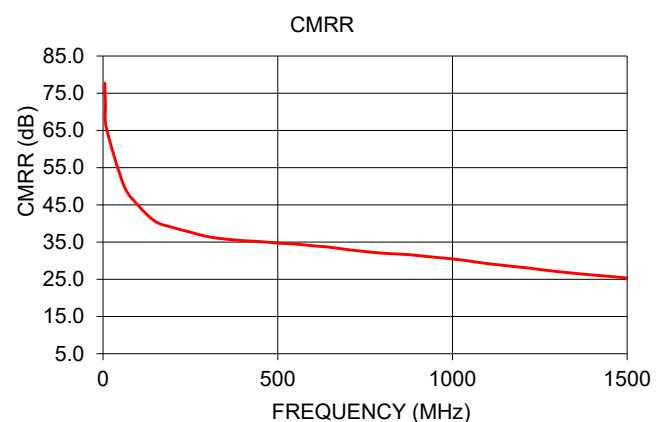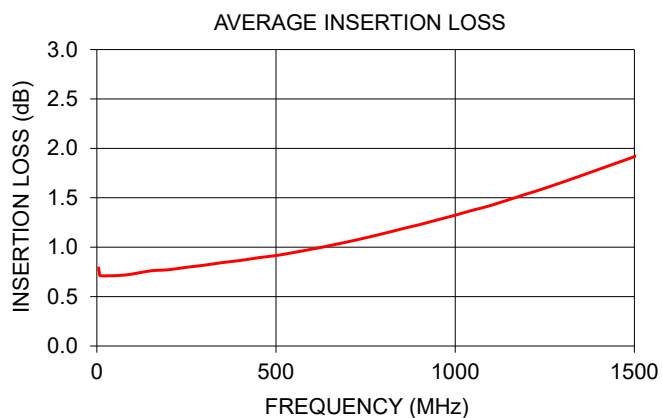

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

