Surface Mount RF Transformer

50Ω 0.5 to 2200 MHz

Features

- wideband, 0.5-2200 MHz,
- excellent return loss
- terminations, solder plated with nickel barrier for solderability & excellent each resistance
- autotransformer
- plastic base with leads
- aqueous washable

TC1.5-1+

Generic photo used for illustration purposes only

CASE STYLE: AT224-1

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Applications

• impedance matching

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit
Impedance Ratio (Secondary/Primary)			1.5		
Frequency Range		0.5		2200	MHz
	0.5-2200		3		
Insertion Loss*	1-2000		2		dB
	2-1100		1		

^{*} Insertion Loss is referenced to mid-band loss, 0.3 dB typ.

Maximum Ratings


Parameter	Ratings	
Operating Temperature	-20°C to 85°C	
Storage Temperature	-55°C to 100°C	
RF Power	0.25W	
DC Current	30mA	

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

Function	Pin Number	
PRIMARY DOT	6	
PRIMARY	4	
SECONDARY DOT	1	
SECONDARY	4	
NOT USED	2,5	





Outline Drawing

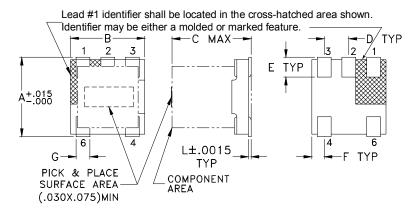


Outline Dimensions (inch mm)

A B C D E F G H J K L .150 .150 .150 .050 .040 .025 .028 .065 .190 .030 .007 .3.81 3.81 4.06 1.27 1.02 0.64 0.71 1.65 4.83 0.76 0.18

Typical Performance Data

FREQUEN (MHz)	CY INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
0.10	0.79	9.30	
10.00	0.34	32.27	
55.00	0.26	34.33	
100.00	0.28	31.27	
500.00	0.38	21.15	
800.00	0.47	17.71	
1200.00	0.59	15.28	
1500.00	0.71	16.70	
1950.00	1.04	25.47	
2250.00	1.43	11.82	





Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp