



top hat
SURFACE MOUNT
RF Transformer

TC4-14X+

50Ω 200 to 1400 MHz

FEATURES

- Good Return Loss
- Wideband, 200 to 1400 MHz
- Plastic Base with Leads
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: AT1521

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Impedance Matching
- Push-Pull Amplifiers

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)			4		
Frequency Range		200		1400	MHz
Insertion Loss ¹	200-1400			3.0	dB
	300-1300			2.0	
	800-1100			1.0	
Phase Unbalance	200-300		3.5		Degree


1. Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20°C to +85°C
Storage Temperature	-55°C to +100°C
RF Power	0.25 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. A

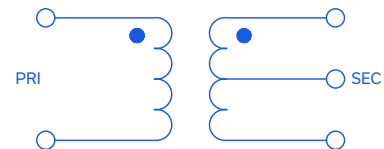

REV. C
ECO-027946
TC4-14X+
MCL NY
251211






PIN CONNECTIONS

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

PRODUCT MARKING: CV


DEMO BOARD MCL P/N: TB-TC4-14X+

OUTLINE DRAWING

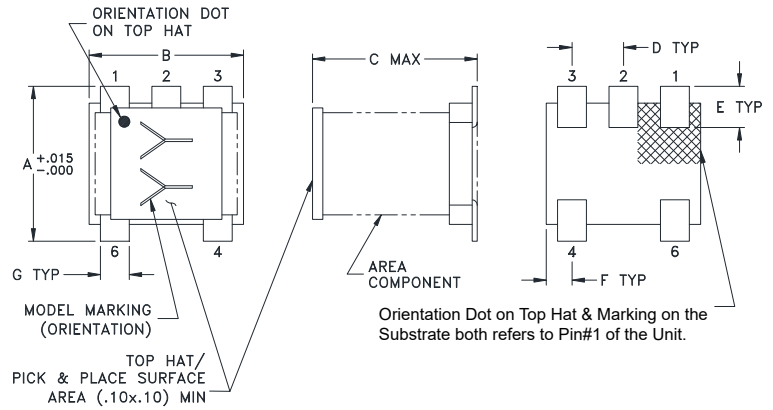

Top-hat total thickness: .013 inches MAX.

PCB Land Pattern



Suggested Layout,
Tolerance to be within ± 0.002 in

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76


Weight: 0.15 grams

TAPE & REEL INFORMATION: F17



TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
200	1.33	6.74
210	1.26	6.88
300	1.22	8.07
550	0.92	9.54
800	0.88	10.68
950	0.82	13.05
1100	0.70	21.93
1300	1.53	10.04
1350	1.77	7.15
1400	2.77	5.05

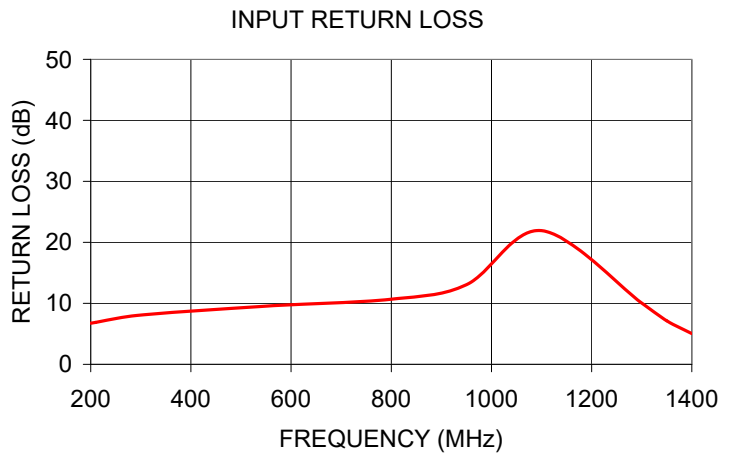

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html