



SURFACE MOUNT

# Directional Coupler

**TCD-10-4-75+**

Mini-Circuits

75Ω 10 dB 5 to 1000 MHz

## FEATURES

- Wideband, 5-1000 MHz
- Excellent flatness,  $\pm 0.1$  dB typ.
- Better performance than MA-COM EMDC-10-1-75
- Footprint compatible to EMDC-10-1-75
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- CATV

## ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1000	MHz
Mainline Loss <sup>1</sup>	5 - 50	—	1.0	1.5	dB
	5 - 500	—	1.1	1.5	
	500 - 1000	—	1.3	1.9	
Nominal Coupling	5 - 1000		9.9 $\pm$ 0.5		dB
Coupling Flatness( $\pm$ )	5 - 1000		$\pm 0.3$		dB
Directivity	5 - 50	19	22	—	dB
	5 - 500	13	20	—	
	500 - 1000	11	15	—	
VSWR	5 - 1000	—	1.25	—	:1
Input Power	5 - 1000	—	—	1.0	W

1. Mainline loss includes theoretical power loss at coupled port.


## ABSOLUTE MAXIMUM RATINGS<sup>2</sup>

Parameter	Ratings
Operating Temperature	-40°C to +85°C <sup>3</sup>
Storage Temperature	-55°C to +100°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Case temperature is defined as temperature on ground leads.

## ELECTRICAL SCHEMATIC

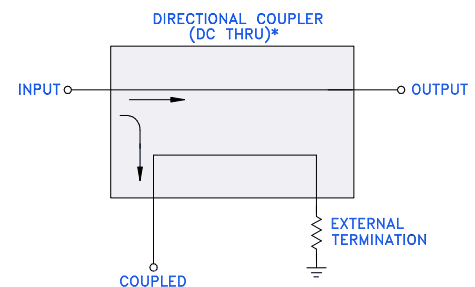

\* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

Mini-Circuits

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

REV. E  
ECO-026252  
ED-12467  
TCD-10-4-75+  
MCL NY  
250716

PAGE 1 OF 3



Mini-Circuits

SURFACE MOUNT

## Directional Coupler


TCD-10-4-75+

75Ω 10 dB 5 to 1000 MHz

## PIN CONNECTIONS

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6

PRODUCT MARKING: N/A

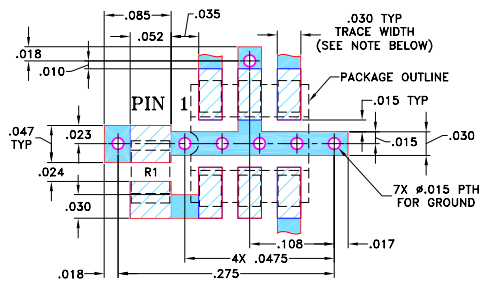DEMO BOARD MCL P/N: TB-TCD-10-4-75+  
SUGGESTED PCB LAYOUT (PL-010)

RESISTOR R1: 75 ± 1% Ohm, 0805 SIZE


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## OUTLINE DRAWING

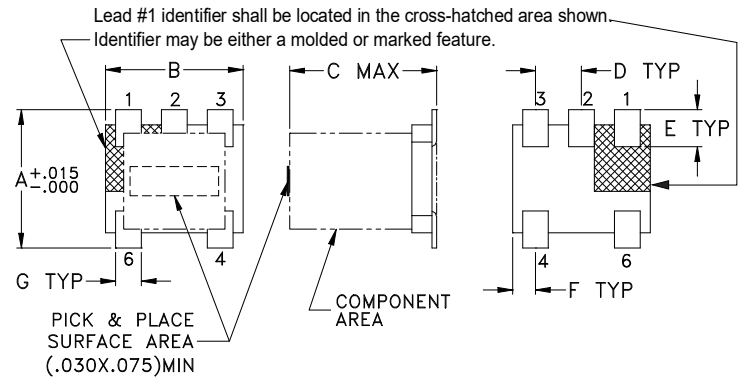

## PCB Land Pattern

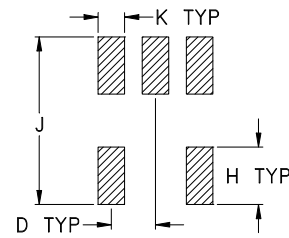

Suggested Layout,  
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches)  
mm

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

## TAPE &amp; REEL INFORMATION: F17



SURFACE MOUNT

# Directional Coupler




**TCD-10-4-75+**

Mini-Circuits

75Ω 10 dB 5 to 1000 MHz

## TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out			In	Out	Cpl
5.00	1.06	9.94	22.66	19.73	28.50	19.46
10.00	1.01	9.90	22.91	20.57	35.13	20.26
50.00	1.05	9.93	22.54	20.35	38.95	20.20
100.00	1.08	9.95	22.09	20.17	33.10	20.18
250.00	1.14	9.96	20.05	19.68	25.68	20.63
500.00	1.24	9.92	16.74	19.39	21.07	23.17
650.00	1.31	9.86	15.28	19.74	20.28	25.18
800.00	1.39	9.85	14.81	20.28	19.92	25.99
900.00	1.45	9.82	14.88	22.54	20.29	25.37
1000.00	1.51	9.83	15.23	26.00	21.07	24.19

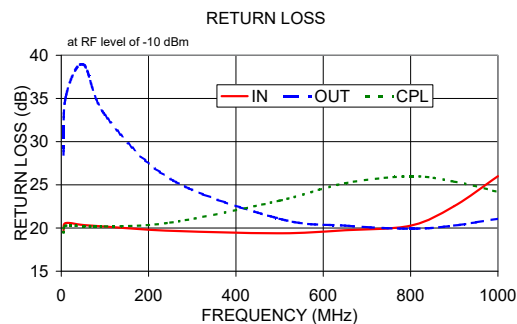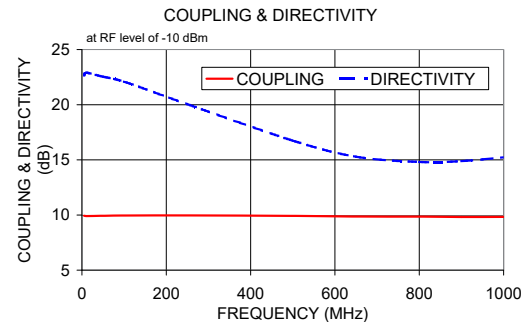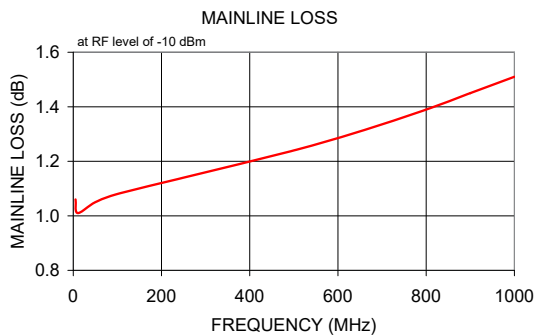

- NOTES**
- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

