



Mini-Circuits

SURFACE MOUNT top hat

Power Splitter/Combiner

TCP2-182HI75X+

75Ω (2 Way-0°) 5 to 1800 MHz

KEY FEATURES

- Wideband 5 to 1800 MHz
- Low Insertion Loss 2.0 dB Typ.
- External Resistor, Capacitors, Inductors Required
- High Isolation 43 dB Typ. at 100 - 850 MHz




Generic photo used for illustration purposes only

APPLICATIONS

- DOCSIS® 4.0 Systems
- VHF/UHF
- CATV

FUNCTIONAL DIAGRAM



PRODUCT OVERVIEW

Mini-Circuits' TCP2-182HI75X+ is a 75Ω 2-way 0° surface-mount power splitter/combiner covering the 5 to 1800 MHz frequency range, supporting bandwidth requirements for DOCSIS® 4.0 systems and equipment, as well as other broadband applications. This model can handle up to 0.5W RF input power as a splitter, and provides low insertion loss and low phase and amplitude unbalance. It features core and wire construction mounted on a 6-pad printed laminate base with gold over nickel termination finish. The unit measures .166" x .166" x .140" with Mini-Circuits' TopHat® feature to improve speed and accuracy of pick and place assembly. This design requires external capacitors, resistor and inductors for impedance matching and cycling isolation between the output signals (refer to electrical schematic).

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		5		1800	MHz
Insertion Loss (above 3 dB)	5 - 1800	—	1.8	2.5	dB
Isolation	5 - 108	20	23	—	dB
	108 - 834	40	43	—	
	834 - 1800	11	16	—	
Phase Unbalance (±)	5 - 1800	—	4	6	Degree
Amplitude Unbalance (±)	5 - 1800	—	0.7	1.0	dB

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-030186
TCP2-182HI75X+
EDU5350
MCINU
260626

PAGE 1 OF 5



Mini-Circuits

SURFACE MOUNT 

Power Splitter/Combiner

TCP2-182HI75X+

75Ω (2 Way-0°) 5 to 1800 MHz

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Return Loss (Port S)	5 - 1000	18	23	—	dB
	1000 - 1600	13	18	—	
	1600 - 1800	10	13	—	
Return Loss (Port 1)	5 - 50	16	19	—	dB
	50 - 1218	16	18	—	
	1218 - 1800	10	14	—	
Return Loss (Port 2)	5 - 50	16	19	—	dB
	50 - 1218	16	18	—	
	1218 - 1800	10	14	—	

1. Bi-directional can function as a splitter or as a combiner. Refer to S-Parameters for actual performance.

ABSOLUTE MAXIMUM RATINGS²

Operating Case Temperature		-40°C to +85°C
Storage Temperature		-55°C to +100°C
Input Power	as splitter	0.5 W
	as combiner per port	0.25 W

2. Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits


SURFACE MOUNT 

Power Splitter/Combiner

TCP2-182HI75X+

75Ω (2 Way-0°) 5 to 1800 MHz

TYPICAL PERFORMANCE GRAPHS AT +25°C

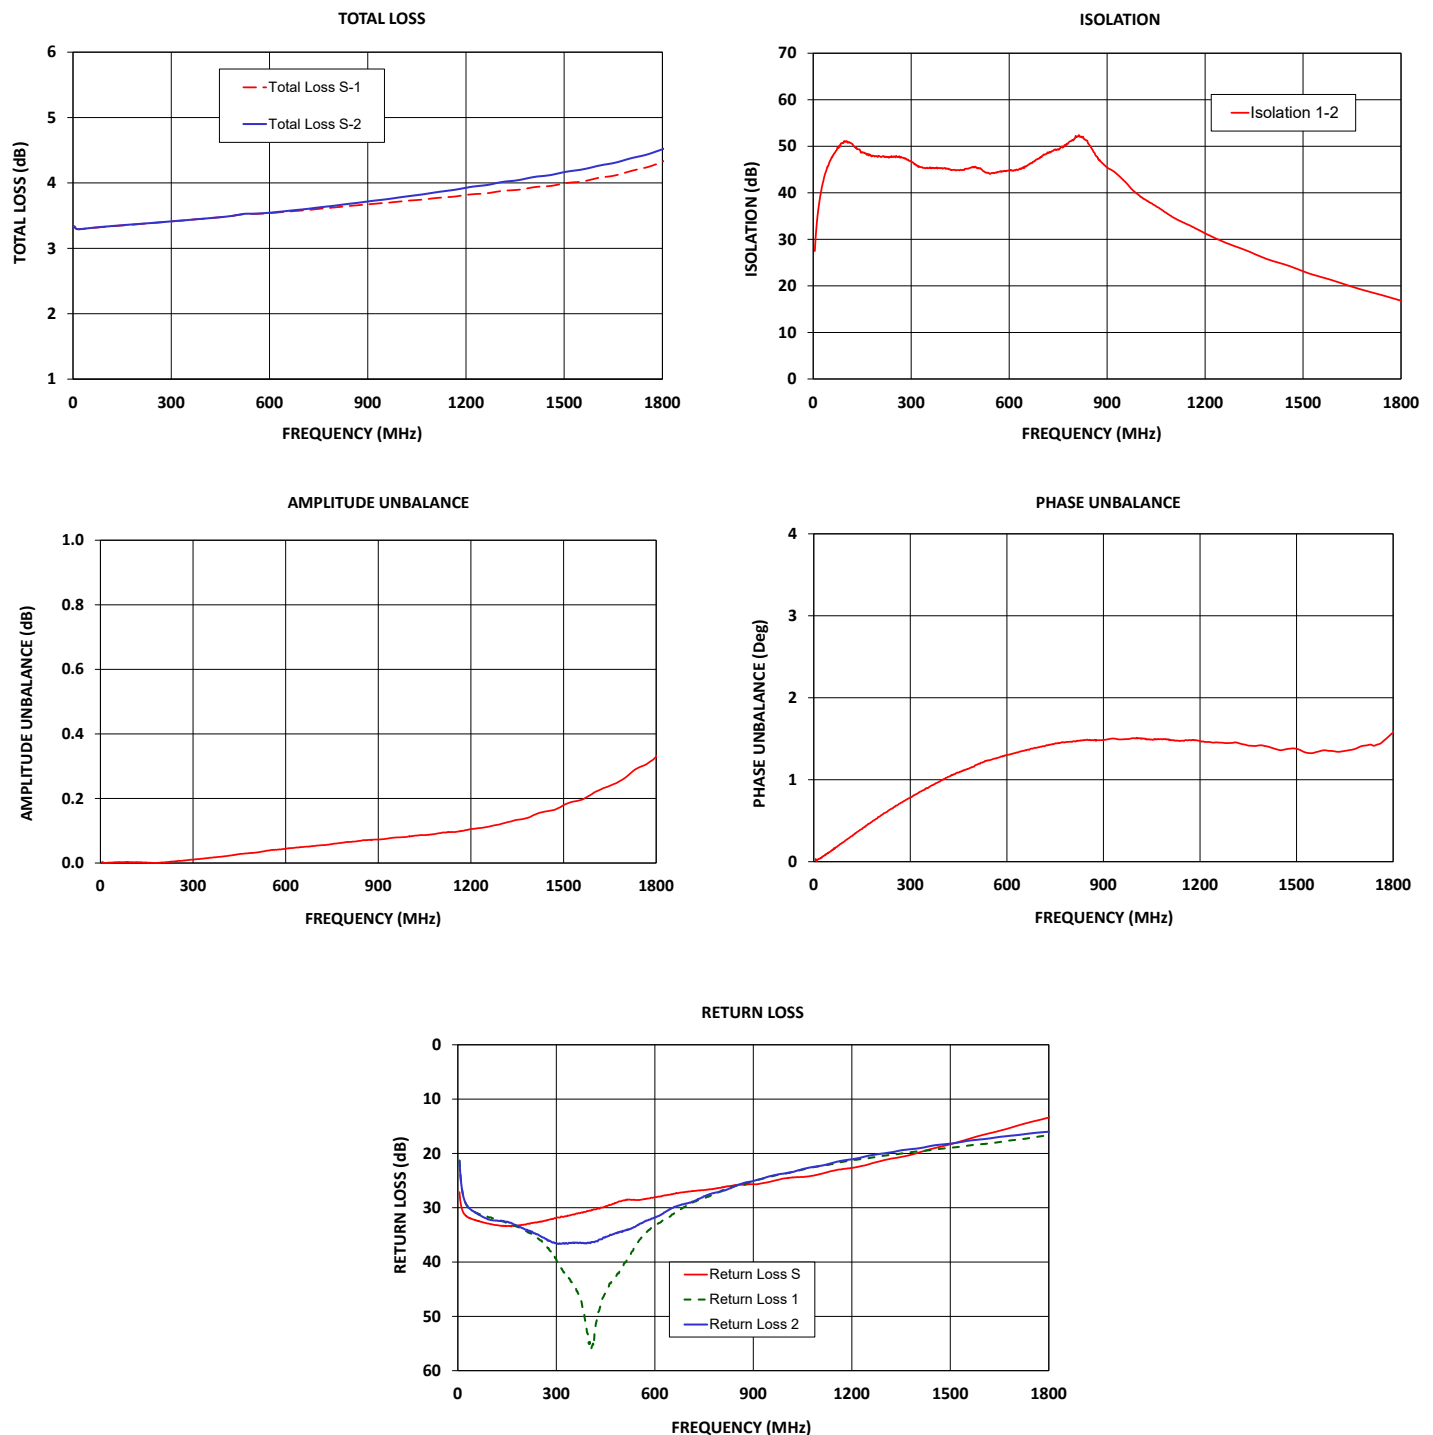



Mini-Circuits

SURFACE MOUNT ^{top hat}

Power Splitter/Combiner

TCP2-182HI75X+

75Ω (2 Way-0°) 5 to 1800 MHz

FUNCTIONAL DIAGRAM





Figure 1. TCP2-182HI75X+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
Sum Port	6	Connects to Sum Port
Port 1	3	Connects to 1 Port
Port 2	4	Connects to 2 Port
GROUND	1	Connects to GND
EXT. CAPACITOR 0.5 pF	2	2 TO GROUND
EXT. CAPACITOR 1.1 pF	5	5 TO GROUND
EXT. COMPONENTS (INDUCTOR 4.7nH, RESISTOR 196Ω, INDUCTOR 4.7nH IN SERIES)	3,4	—

SUGGESTED PCB LAYOUT (PL-802)

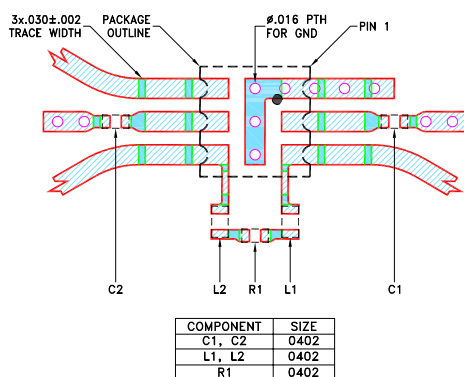

NOTES:


- TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .030±.002 COPPER: 1/2 Oz ON EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-1300/ TB-1300-1.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

■ DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK.

Figure 2. Suggested PCB Layout PL-864

CASE STYLE DRAWING

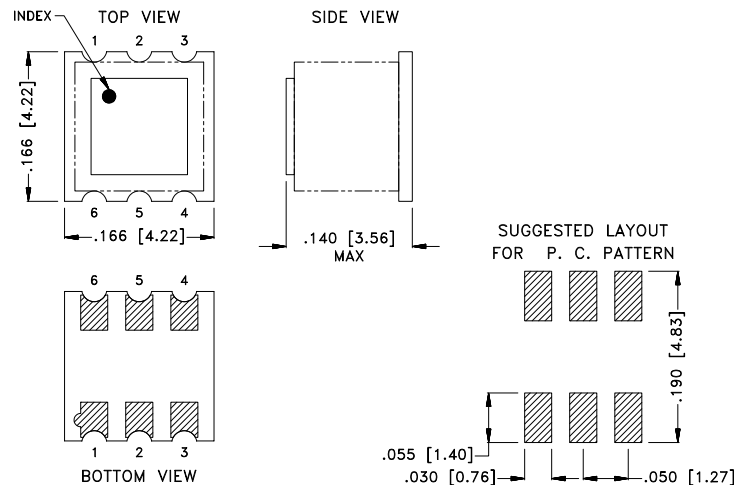

Weight: .1 grams

Dimensions are in inches[mm]. Tolerances: 2Pl.±.01; 3Pl.±.005

PRODUCT MARKING*: ZM

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

SURFACE MOUNT



Power Splitter/Combiner

TCP2-182HI75X+

75Ω (2 Way-0°) 5 to 1800 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S3P Files) Data Set (.zip file) De-embedded to device pads
Case Style	TT3651 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	F017
Suggested Layout for PCB Design	PL-802
Evaluation Board	TBTCP2182HI75X+ Gerber File
Environmental Rating	ENV02T1

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

