

Ceramic Balun RF Transformer

50Ω 2100 to 2700 MHz 1:2 Ratio

TCW2-272+



CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power*	2W at 25°C

*Passband rating, derate linearly to 1W at 100°C ambient
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	3
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	2,5

Features

- wideband, 2100 to 2700 MHz
- low phase unbalance, 5 deg. and amplitude unbalance, 0.6 dB typ.
- miniature size 0603 (1.6x0.8mm)
- LTCC construction
- low cost
- aqueous washable

Applications

- WLAN
- WiMAX/WiBRO
- ISM
- RADAR

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			2		
Frequency Range		2100	—	2700	MHz
Insertion Loss*	2400 - 2500	—	1.1	1.4	dB
	2100 - 2700	—	1.3	—	
Amplitude Unbalance	2400 - 2500	—	0.6	1.4	dB
	2100 - 2700	—	0.8	—	
Phase Unbalance †	2400 - 2500	—	4	10	Degree
	2100 - 2700	—	8	—	

* Reference Demo Board TB-793+

† Relative to 180°


Typical Performance Data at 25°C**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
2100	1.21	12.69	0.40	10.88
2200	1.15	13.35	0.28	8.73
2300	1.13	13.65	0.20	6.32
2400	1.14	13.52	0.10	3.73
2475	1.16	13.17	0.06	1.68
2500	1.17	13.01	0.04	0.97
2550	1.20	12.68	0.01	0.35
2575	1.22	12.51	0.01	1.01
2600	1.24	12.32	0.01	1.64
2700	1.34	11.34	0.04	4.47

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

Outline Drawing

PCB Land Pattern

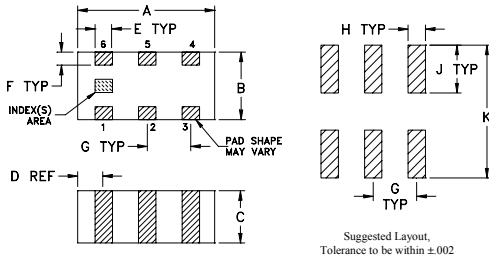


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15

G	H	J	K	wt
.020	.010	.022	.053	grams
0.51	0.25	0.56	1.35	0.005

Demo Board MCL P/N: TB-793+ Suggested PCB Layout (PL-430)

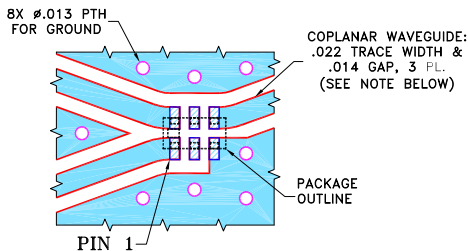

NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.




Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
TCW2-272+
MY/CP/AM
151015

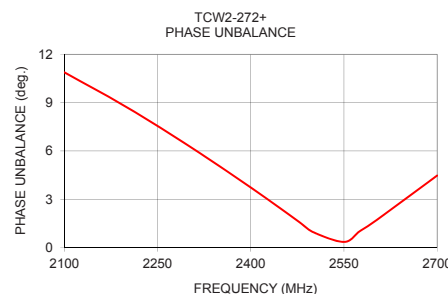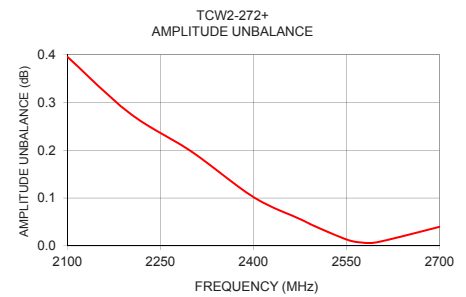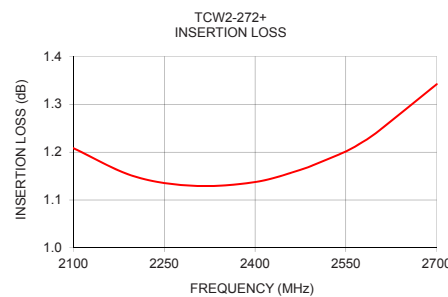

configuration J

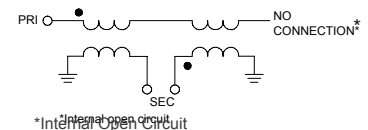

*Internal Open Circuit