


# Surface Mount <sup>top hat®</sup> Low Pass Filter

## ULP-1094+

50Ω DC to 1094 MHz

### The Big Deal

- Low Insertion loss, 1.2dB Typ.
- High rejection, > 30dB
- Sharp insertion loss roll-off
- Good VSWR
- Ultra miniature surface mount package



CASE STYLE: QA2224

### Product Overview

The ULP-1094+ is a lowpass filter in a top hat package (size of 0.25" x 0.25") fabricated using SMT technology. Covering DC to 1094 MHz band width, these units offer good matching within the passband and high rejection. This model uses a miniature high Q capacitors and chip inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low passband insertion loss	Passband insertion loss 1.2dB typical ensures low signal loss throughout the passband
Excellent stopband rejection	Rejection of 30 dB ensures unwanted spurious are eliminated
Excellent return loss at DC-1094 MHz	This makes signal transmission with very less reflections and well-matched with the adjacent component used in the system
Small size, 0.25" x 0.25"	The Ultra miniature surface mount package enables the ULP-1094+ to be used in compact designs.

#### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount <sup>top hat®</sup> Low Pass Filter

## ULP-1094+

50Ω DC to 1094 MHz



CASE STYLE: QA2224

### Features

- High rejection
- Sharp insertion loss roll-off
- Good VSWR, 1.7:1 typ. at passband
- Ultra miniature surface mount package

### Applications

- Wireless communications
- Receivers / Transformers
- Lab use

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC-1094	—	1.2	2.0	dB
	Freq. Cut-Off	F2	1380	—	3.0	—	dB
	VSWR	DC-F1	DC-1094	—	1.7	—	:1
Stop Band	Rejection Loss	F3-F4	1700-2200	20	25	—	dB
		F4-F5	2200-3300	30	35	—	dB
	VSWR	F3-F5	1700-3300	—	20	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1.6W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

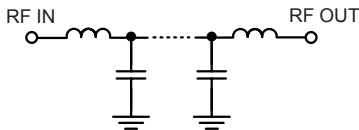

### Typical Frequency Response




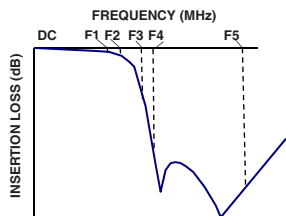


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	0.09	1.01	1	0.67
10	0.08	1.01	10	0.56
100	0.15	1.08	20	0.54
250	0.21	1.11	50	0.51
500	0.28	1.07	100	0.51
1000	0.58	1.34	150	0.50
1094	0.65	1.25	250	0.51
1250	1.80	2.48	300	0.52
1380	3.54	2.38	400	0.54
1400	6.34	4.80	500	0.56
1450	16.29	17.76	550	0.58
1470	20.79	24.03	600	0.59
1490	25.85	29.84	700	0.62
1500	28.78	32.68	850	0.69
1505	30.40	33.98	900	0.73
1700	30.61	69.58	950	0.78
2000	33.64	101.04	1000	0.86
2200	35.46	112.81	1050	0.95
3000	36.84	98.71	1090	1.03
3300	35.41	98.86	1094	1.03

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

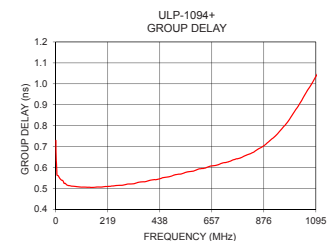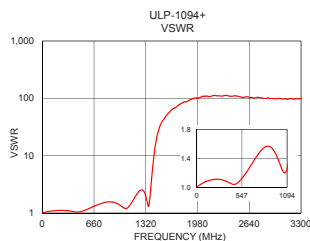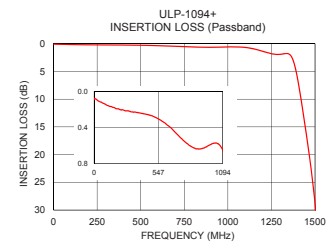

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. OR  
M156192  
ULP-1094+  
EDU2399  
URJ  
170512  
Page 2 of 3

## Pad Connections

INPUT	1
OUTPUT	3
GROUND	2,4,5,6

**Demo Board MCL P/N: TB-894+**  
**Suggested PCB Layout (PL-484)**

**SUGGESTED MOUNTING CONFIGURATION FOR  
 QA2224 CASE STYLE "06FL09" PIN CODE**

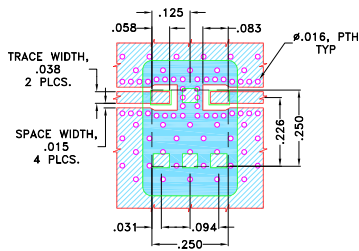


**NOTES:**

1. TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020 ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

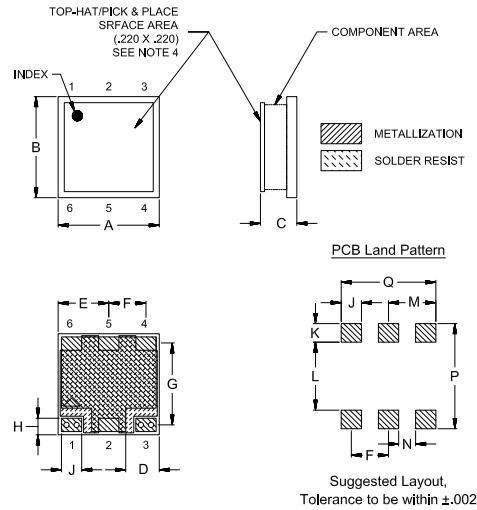

## Outline Dimensions ( Inch )

A	B	C	D	E	F	G	H	J	K
-	-	Min	Max	-	-	-	-	-	-
.250	.250	.075	.100	.075	.125	.092	.201	.041	.050
6.35	6.35	1.91	2.54	1.91	3.18	2.34	5.11	1.04	1.27
L	M	N	P	Q					
-	-	-	-	-					
.168	.117	.042	.260	.234					
4.27	2.97	1.07	6.60	5.94					
									Wt.
									grams
									0.25

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

