

Plug-In Frequency Mixer

VAY-1+

Level 27 (LO Power +27 dBm) 0.5 to 500 MHz



Generic photo used for illustration purposes only

CASE STYLE: A01

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	500mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	1
IF	3
GROUND	2,5,6,7
CASE GROUND	2,5,6,7
NOT USED	4

Features

- good conversion loss, 5.79 dB typ.
- high L-R & L-I isolation, 46 dB typ.
- rugged welded construction
- hermetically sealed

Applications

- VHF/UHF
- FM radio
- defense & federal communications


Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF f_L - f_U	IF	Mid-Band m		Total Range Max.	Total Range Max.	L		M		U		L		M		U	
		\bar{X}	σ			Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.5-500	0.02-500	5.79	0.15	7.5	8.5	47	40	46	35	35	25	35	28	46	35	35	25

1 dB COMP: +24 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2 f_L$ to $f_U/2$]

Outline Drawing

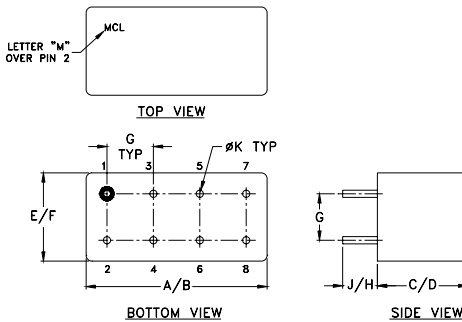


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +27dBm	LO +27dBm	LO +27dBm	LO +27dBm	LO +27dBm
0.05	30.05	6.73	45.06	44.77	1.46	1.14
0.10	30.10	5.90	46.53	46.31	1.46	1.14
0.20	30.20	5.71	46.84	46.41	1.47	1.11
0.50	30.50	5.47	46.89	46.31	1.47	1.19
1.00	31.00	5.47	46.31	45.50	1.48	1.23
17.91	47.91	5.34	45.35	44.81	1.49	1.22
35.76	65.76	5.35	44.40	44.31	1.51	1.18
53.62	83.62	5.37	43.31	43.11	1.54	1.20
125.04	95.04	6.02	42.44	41.42	1.59	1.23
142.89	112.89	6.06	40.80	39.25	1.65	1.18
196.46	166.46	6.19	39.78	38.66	1.68	1.25
232.17	202.17	6.31	40.08	38.07	1.75	1.22
250.02	220.02	6.42	40.67	37.72	1.77	1.21
285.73	255.73	6.42	40.68	36.54	1.86	1.25
321.44	291.44	6.30	41.05	34.78	1.92	1.29
357.15	327.15	6.37	41.32	34.37	2.02	1.47
392.86	362.86	6.31	38.74	35.82	2.09	1.52
446.43	416.43	6.72	35.92	36.76	2.17	1.70
464.28	434.28	6.85	34.39	38.34	2.27	1.96
500.00	470.00	7.04	33.75	35.90	2.27	1.95

Electrical Schematic

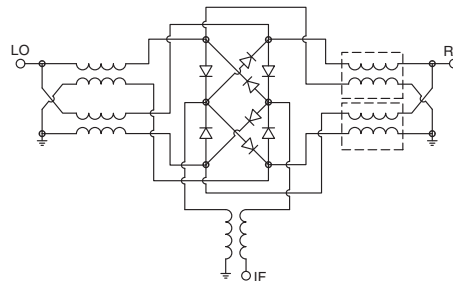







Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
VAY-1+
DJ/TD/CP/AM
200402
Page 1 of 2

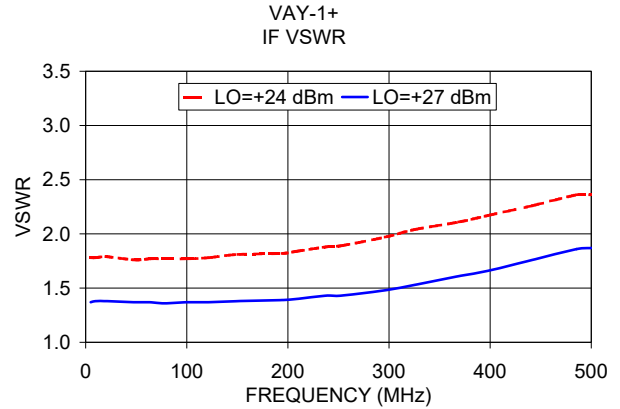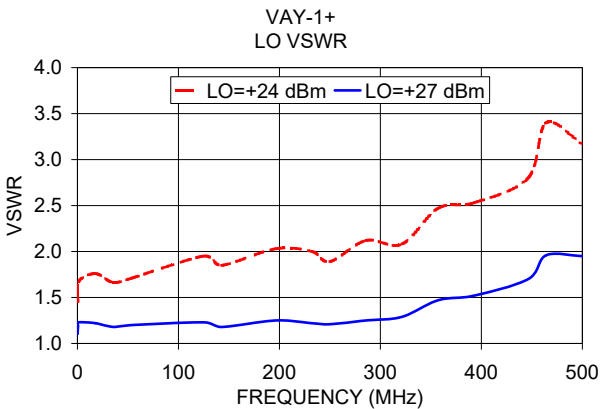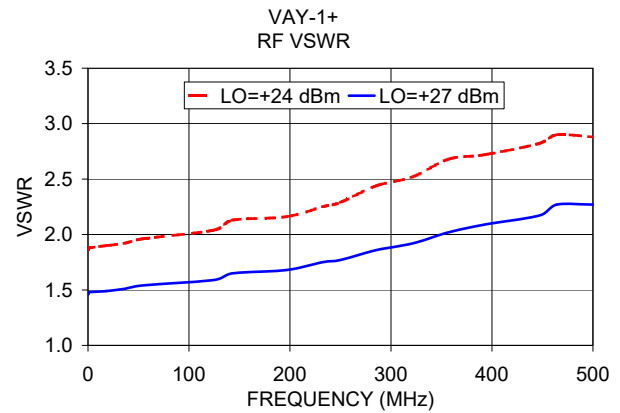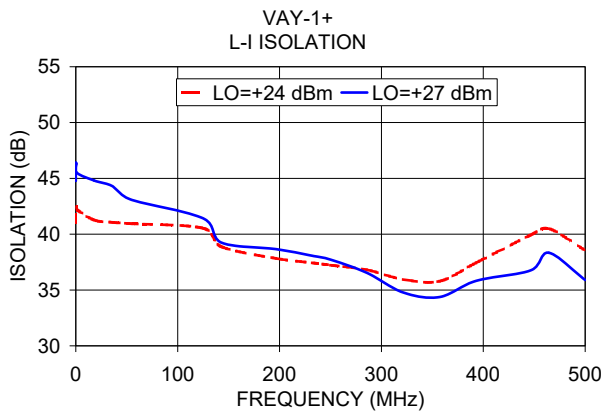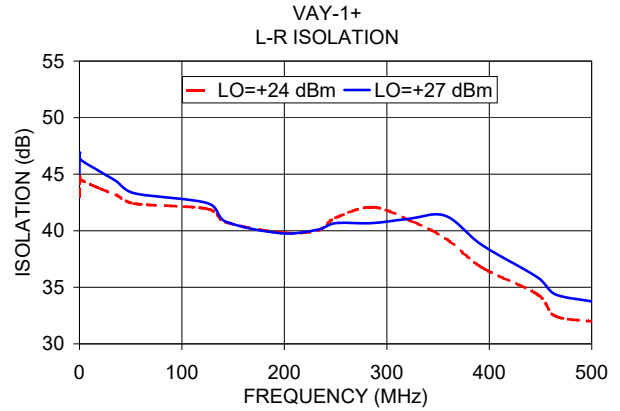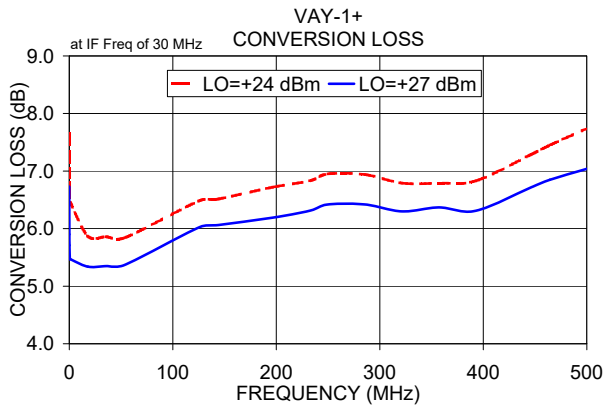

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

