Coaxial **High Pass Filter**

50Ω

1800 to 8000 MHz

VHFG-1760+

The Big Deal • Good power handling, 2.5W

- Temperature stable
- Rugged unibody construction
- Good rejection, 38 dB typical



Product Overview

VHFG-1760+ is a 50Ω high pass filter built in rugged unibody construction. Covering 1800-8000 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VHFG-1760+ offer low insertion loss, and good power handling capability. It handles up to 2.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

Key Features

Feature	Advantages		
Low passband insertion loss	Suitable for high performance application.		
2.5W Power handling	Supports a range of system power requirements.		
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.		

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. G. The parts covered by this specification document are subject to Mini-Circuits trandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial **High Pass Filter**

50Ω

1800 to 8000 MHz

Features

- Temperature stable
- Good power handling, 2.5W
- · Connectorized package
- Rugged unibody construction


Applications

- Transmitters / Receivers
- Test and measurements
- · Military applications
- Telecommunications and broadband wireless systems

Functional Schematic



Typical Frequency Response



Electrical Specifications at 25°C							
Parameter		F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC - 800	30	38	-	dB
		F1-F2	800 - 1200	28	36	-	dB
	Freq. Cut-Off	F3*	1560	-	3.0	-	dB
Pass Band	Insertion Loss	F4-F5	1800 - 2100	-	2.0	-	dB
		F5-F6	2100 - 5200	-	1.2	1.7	dB
		F6-F7	5200 - 8000	-	2.0	-	dB
	Return Loss	F4-F6	1800 - 5200	-	12	-	dB
		F6-F7	5200 - 8000	-	9	-	dB

In Applications where DC voltage is present at either input or output ports, DC blocks are required.


* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis

Maximum Ratings			
Operating Temperature	-55°C to 125°C		
Storage Temperature	-55°C to 125°C		
RF Power Input*	2.5W max.@25°C		
*Passband rating, derate linearly to 0.4W at 125°C ambient			

۴P Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	74.73	0.09
100	55.03	0.14
500	42.22	0.30
600	40.89	0.33
800	38.65	0.40
1200	43.17	0.75
1275	30.33	0.99
1335	20.48	1.43
1410	10.34	3.30
1520	3.05	14.45
1560	2.51	14.21
1760	1.44	26.71
1800	1.36	23.00
2000	1.21	13.39
2100	1.13	12.71
2500	0.73	16.73
5200	0.48	18.01
6000	0.64	13.21
7000	0.87	10.26
8000	0.99	9.61

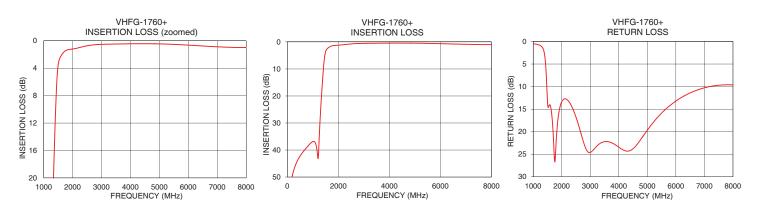

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

∭Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV OR ECO-010315 VHFG-1760+ EDU4118 URJ 211026 Page 2 of 3

VHFG-1760+




Generic photo used for illustration purposes only CASE STYLE: FF704

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Coaxial Connections

PORT - 1	SMA-Male
PORT - 2	SMA-Female

Outline Drawing

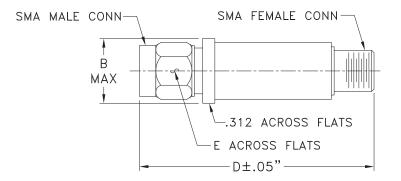

Outline Dimensions (inch)

В	D	Е	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Note: Please refer to case style drawing for details

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Min-Circuit's applicable established test performance criteria and measurement instructions. G. The parts covered by this specification document are subject to Min-Circuits and ard limited warranty and terms and conditions (collectivity, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits