



Mini-Circuits

LTCC COAXIAL

High Pass Filter

VHFG-440+

50 Ω

550 to 6000 MHz

SMA Male/Female

KEY FEATURES

- Low Insertion Loss, 0.9 dB Typ.
- Return Loss, 10 dB Typ.
- Stopband Rejection, 52 dB Typ.
- Rugged Unibody Construction
- Power Handling: 4 Watts

APPLICATIONS

- Test and Measurement
- Satellite Communications
- 5G Sub 6 GHz and Wi-Fi 6E




Generic photo used for illustration purposes only

PRODUCT OVERVIEW

VHFG-440+ is a 50 Ω high pass filter built in rugged unibody construction. Covering 550-6000 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VHFG-440+ offer low insertion loss, and excellent power handling capability. It handles up to 4 W RF input power and provides a wide operating temperature range from -55°C to 125°C.

FUNCTIONAL DIAGRAM

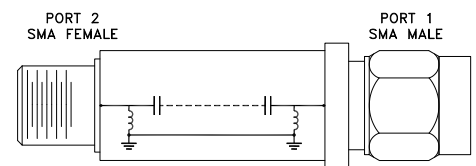ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	F3-F4	550 - 1500	—	1.7	2.8	dB
		F4-F5	1500 - 6000	—	0.9	1.4	
	Return Loss	F3-F4	550 - 1500	—	10	—	dB
		F4-F5	1500 - 6000	—	10	—	
Stopband	Rejection	DC-F1	DC - 160	40	52	—	dB
		F1-F2	160 - 300	20	27	—	
	Freq. Cut-Off ³	Fc	450	—	3	—	dB

1. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

3. Typical variation $\pm 5\%$


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁵	4 W @+25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.8 W at +125°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

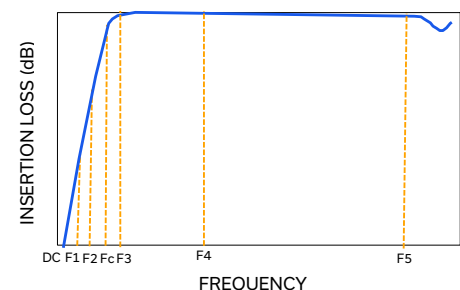

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-026978
VHFG-440+
EDU5161
URJ
250916

PAGE 1 OF 4



LTCC COAXIAL

High Pass Filter

VHFG-440+






Mini-Circuits

50 Ω

550 to 6000 MHz

SMA Male/Female

TYPICAL PERFORMANCE GRAPHS

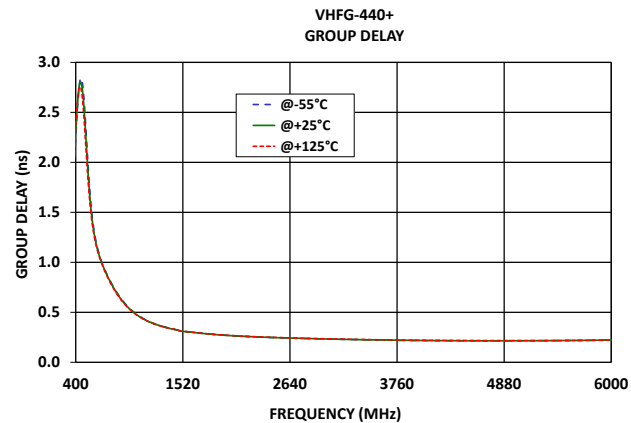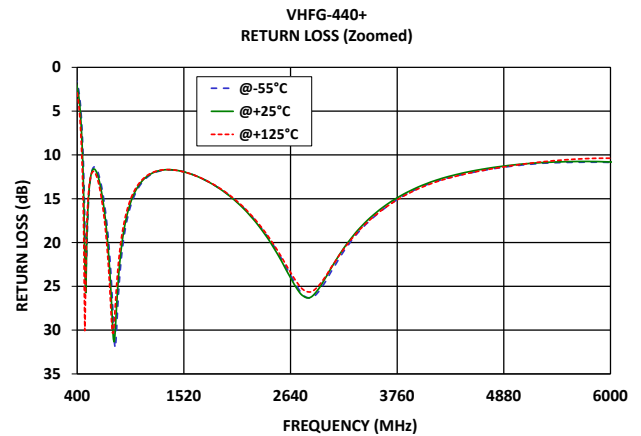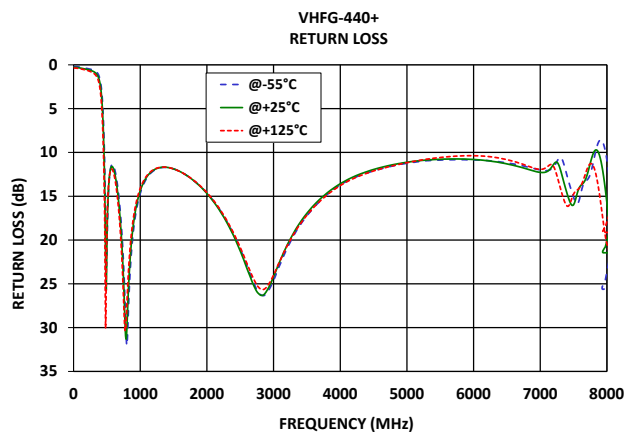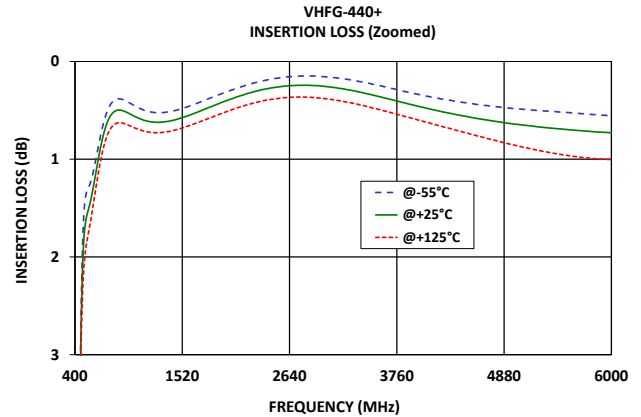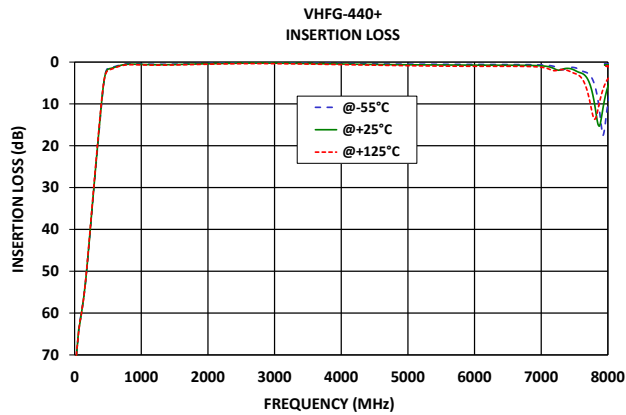




CONNECTOR DESCRIPTION

Function	Functionality	Connector
RF1 ¹	Port-1	SMA MALE
RF2 ¹	Port-2	SMA FEMALE

CASE STYLE DRAWING

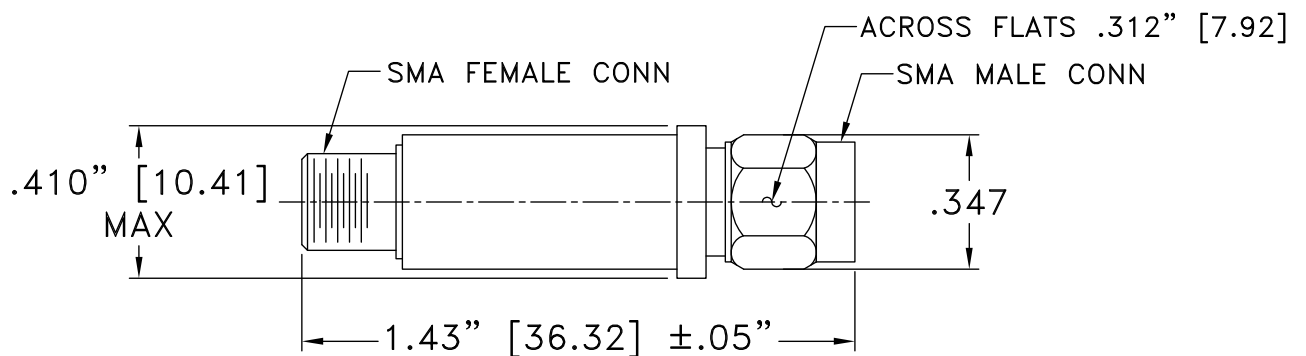

Unit weight: 10.0grams

Dimensions are in inches (mm). Tolerances: 2 Pl. ± 0.04 "; 3 Pl. ± 0.30 "

PRODUCT MARKING*: VHFG-440+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC COAXIAL

High Pass Filter

VHFG-440+

50Ω

550 to 6000 MHz

SMA Male/Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	FF704
RoHS Status	Compliant
Environmental Ratings	ENV113

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

