



Mini-Circuits

LTCC COAXIAL

Low Pass Filter

VLFG-160+

50 Ω

DC to 160 MHz SMA Male/Female

KEY FEATURES

- Low Insertion Loss, 0.9 dB Typ.
- Return Loss, 18 dB Typ.
- Stop Band Rejection, 50 dB Typ.
- Rugged unibody construction
- Power Handling: 3.5 Watts



Generic photo used for illustration purposes only


APPLICATIONS

- VHF Transmitters / Receivers
- Aircraft Communications

PRODUCT OVERVIEW

VLFG-160+ is a Low Pass filter with DC to 160 MHz passband supporting a variety of applications. This model provides 0.9 dB typical insertion loss over a wide band due to its rugged unibody construction. VLFG-160+ offers low insertion loss, and excellent power handling capability. It handles up to 3.5 W RF input power and provides a wide operating temperature range from -55°C to 125°C.

FUNCTIONAL DIAGRAM

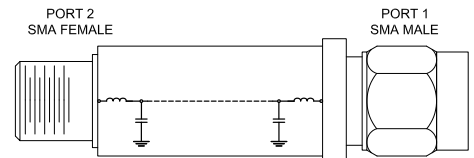ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC- 160	—	0.9	1.6	dB
	Freq. Cut-Off ³	Fc	240	—	3	—	dB
	Return Loss	DC-F1	DC - 160	10	18	—	dB
Stopband	Rejection	F2-F3	350 - 750	20	29	—	dB
		F3-F4	750 - 1500	35	41	—	
		F4-F5	1500 - 3000	38	50	—	
		F5-F6	3000 - 6100	20	37	—	
		F6-F7	6100-8500	—	19	—	

1. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

3. Typical variation $\pm 5\%$


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁵	3.5 W @25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.8 W at +125°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

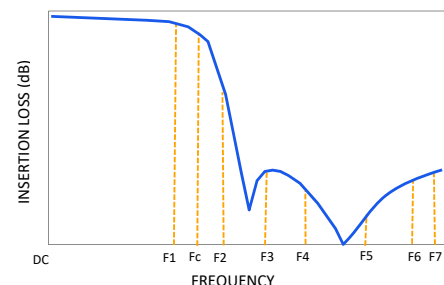

Mini-Circuits



LTCC COAXIAL





Low Pass Filter

VLFG-160+

50 Ω

DC to 160 MHz SMA Male/Female

TYPICAL PERFORMANCE GRAPHS AT +25°C

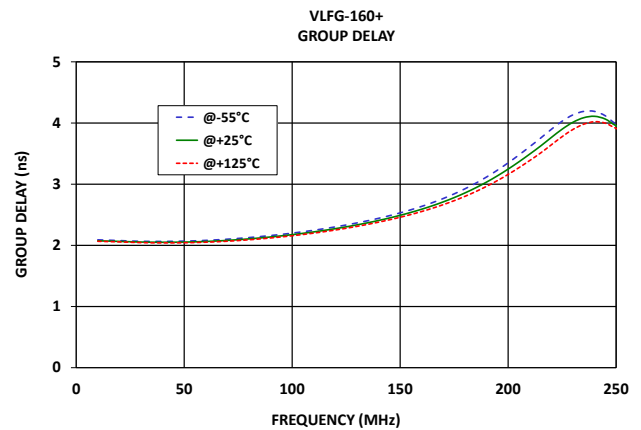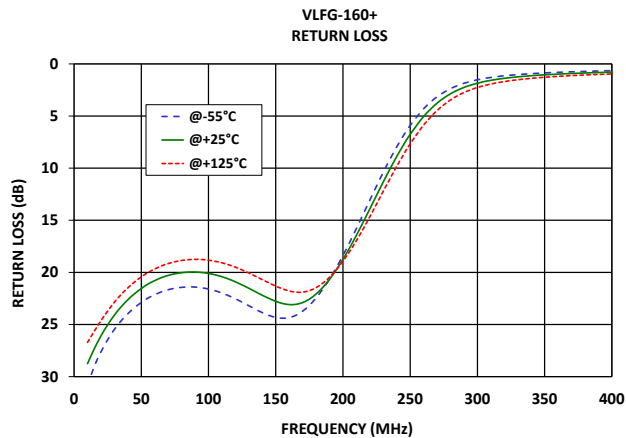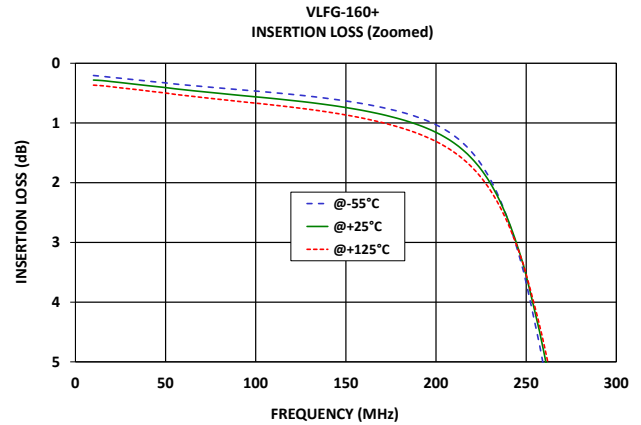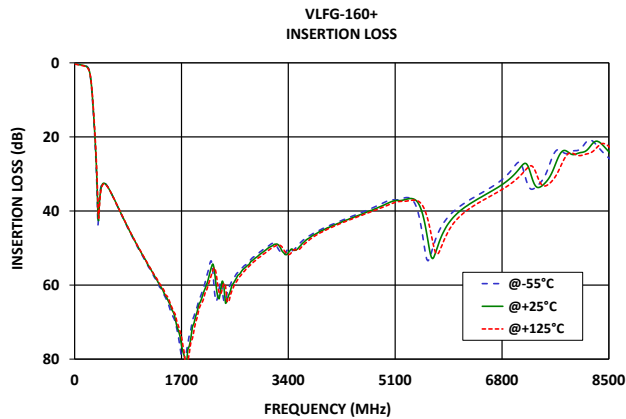



LTCC COAXIAL

Low Pass Filter

VLFG-160+

50Ω


DC to 160 MHz

SMA Male/Female

CONNECTOR DESCRIPTION

Function	Functionality	Connector
RF1 ¹	Port-1	SMA MALE
RF2 ¹	Port-2	SMA FEMALE

CASE STYLE DRAWING

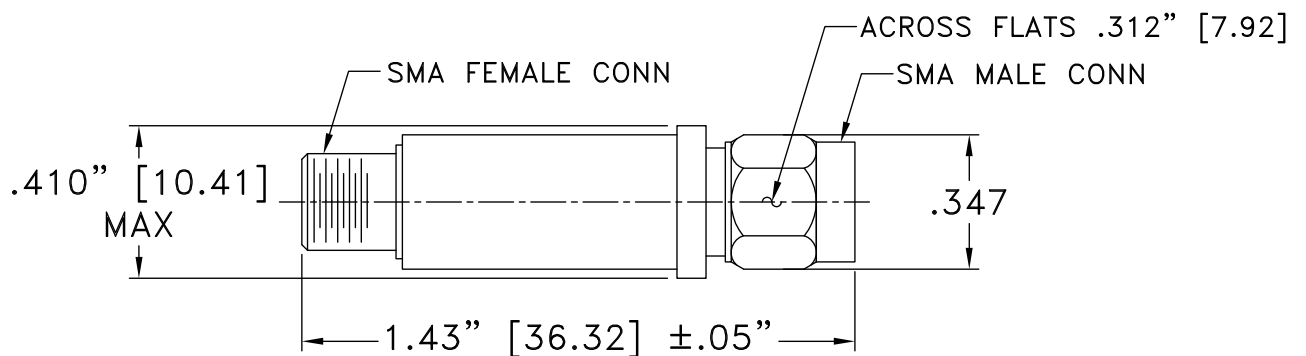

Unit weight: 10.0grams

Dimensions are in inches (mm). Tolerances: 2 Pl. ± 0.04 "; 3 Pl. ± 0.30 "

PRODUCT MARKING*: VLFG-160+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC COAXIAL

Low Pass Filter

VLFG-160+

50Ω

DC to 160 MHz

SMA Male/Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	FF704
RoHS Status	Compliant
Environmental Ratings	ENV113

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

