

Coaxial Low Pass Filter

VLFG-3400+

50Ω DC to 3400 MHz



Generic photo used for illustration purposes only
CASE STYLE: FF704

The Big Deal

- Excellent power handling, 4.5W
- Temperature stable
- Rugged unibody construction
- Good rejection, 40 dB typical

Product Overview

VLFG-3400+ is a 50Ω low pass filter built in rugged unibody construction. Covering DC-3400 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-3400+ offer low insertion loss, and excellent power handling capability. It handles up to 4.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
4.5W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Low Pass Filter

50Ω DC to 3400 MHz

VLFG-3400+



Generic photo used for illustration purposes only
CASE STYLE: FF704

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Features

- Low loss, 1.4dB typ.
- High rejection 40dB typ.
- Excellent power handling, 4.5W
- Temperature stable
- Connectorized package
- Rugged unibody construction

Applications


- Military radar applications
- Test and measurement
- Telecommunications and broadband wireless applications

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC - 3400	—	1.4	2.1	dB
	Freq. Cut-Off	F2*	3800	—	3.0	—	dB
	Return Loss	DC-F1	DC - 3400	—	16	—	dB
Stop Band	Rejection Loss	F3-F4	4700 - 5000	20	35	—	dB
		F4-F5	5000 - 8500	30	40	—	dB
		F5-F6	8500 - 15000	—	25	—	dB

In Application where DC voltage is present at either input or output port, DC blocks are required.
* Typically, a $\pm 5\%$ frequency deviation from the stated value may occur on a unit-to-unit basis.

Functional Schematic

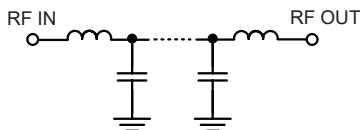

Maximum Ratings




Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	4.5W max. @25°C

*Passband rating, derate linearly to 1W at 125°C ambient
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.04	44.51
100	0.09	37.65
300	0.17	34.68
500	0.22	35.23
1000	0.33	28.69
1500	0.46	20.76
2000	0.62	17.31
3400	1.37	22.76
3800	3.36	9.51
4040	10.10	2.96
4240	20.42	1.62
4380	30.36	1.32
4700	44.69	1.04
5000	51.22	0.91
7000	48.11	0.53
8500	40.93	0.45
9000	39.47	0.44
10000	36.90	0.42
12000	32.78	0.45
15000	30.86	1.12

Typical Frequency Response

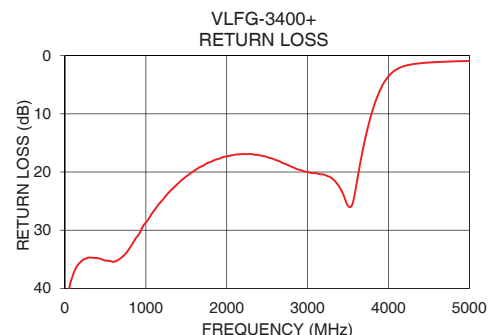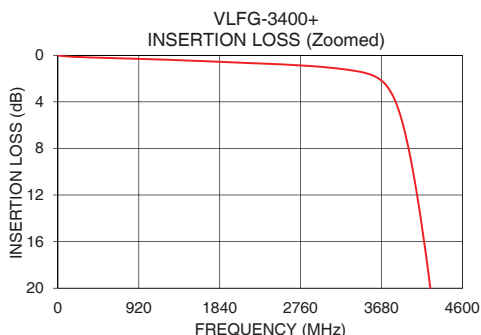

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Coaxial Connections

PORT - 1	SMA-Male
PORT - 2	SMA-Female

Outline Drawing

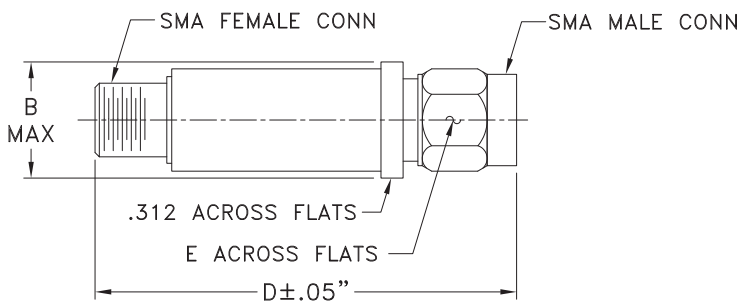

Outline Dimensions (inch)

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

