

50Ω DC to 530 MHz

VLFG-530+

The Big Deal

- Excellent power handling, 3.5 W
- Temperature stable
- Rugged unibody construction
- Good rejection, 31 dB typical



Generic photo used for illustration purposes only CASE STYLE: FF704

Product Overview

VLFG-530+ is a 50 Ω low pass filter built in rugged unibody construction. Covering DC-530 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-530+ offer low insertion loss, and excellent power handling capability. It handles up to 3.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

Key Features

Feature Advantages	
Low passband insertion loss	Suitable for high performance application.
3.5 W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits trandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Low Pass Filter

50 Ω DC to 530 MHz


Features

- Low loss, 1dB typical
- Good rejection 31 dB typical
- Excellent power handling, 3.5 W
- Temperature stable
- Connectorized package
- Rugged unibody construction


Applications

- Harmonic Rejection
- VHF/UHF transmitters / receivers
- RF suppression for DC lines on PCB
- Anti-aliasing for A/D converter

Functional Schematic



Typical Frequency Response







Generic photo used for illustration purposes only CASE STYLE: FF704

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Pa	rameter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Insertion Loss	DC-F1	DC - 530	_	1.0	1.8	dB
Pass Band	Freq. Cut-Off	F2*	670	_	3.0	_	dB
	Return Loss	DC-F1	DC - 530	_	18	-	dB
Stop Band	Rejection Loss	F3-F4	980 - 2600	25	31	_	dB
		F4-F5	2600 - 4000	_	27	l _	dB


In Application where DC voltage is present at either input or output port, DC blocks are required. * Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

Maximum Ratings				
Operating Temperature	-55°C to 125°C			
Storage Temperature	-55°C to 125°C			
RF Power Input*	3.5 W max.@25°C			
Peesband rating, derate linearly to 0.6 W at 125°C ambient				

Passband rating, derate linearly to 0.6 W at 125°C ambient Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)		
10	0.11	38.21		
50	0.16	34.52		
100	0.22	32.67		
250	0.38	33.27		
500	0.86	25.49		
530	0.98	23.98		
650	2.20	17.15		
670	2.83	14.08		
675	3.03	13.28		
790	18.18	2.44		
820	20.36	1.88		
870	30.87	1.33		
980	31.96	0.82		
1000	32.22	0.76		
2000	50.28	0.33		
2600	31.51	0.29		
3000	28.89	0.26		
3500	27.44	0.24		
3750	27.03	0.23		
4000	26.65	0.23		

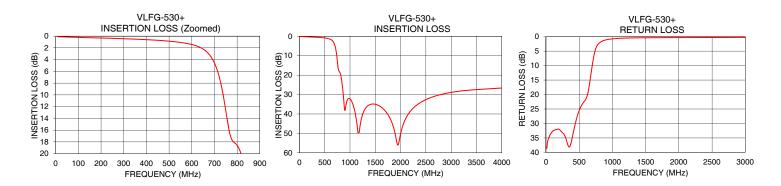

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits trandard limited warranty and terms and conditions (collectivity, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.A ECO-013807 VLFG-530+ EDU3701 URJ 220627 Page 2 of 3

Coaxial Connections

PORT - 1	SMA-Male
PORT - 2	SMA-Female

Outline Drawing

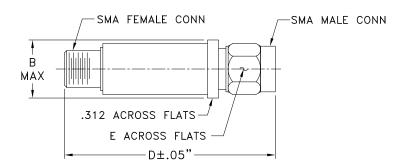

Outline Dimensions (inch)

в	D	Е	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Note: Please refer to case style drawing for details

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuit's trandard limited warranty and terms and conditions (collectivity, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp