**VLFG-800+** 

 $50\Omega$ DC to 800 MHz

Generic photo used for illustration purposes only CASE STYLE: FF704

# The Big Deal

- Excellent power handling, 4.5W
- Temperature stable
- Rugged unibody construction
- Good rejection, 47 dB typical

## **Product Overview**

VLFG-800+ is a 50 $\Omega$  low pass filter built in rugged unibody construction. Covering DC-800 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-800+ offer low insertion loss, and excellent power handling capability. It handles up to 4.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

# **Key Features**

Feature	Advantages		
Low passband insertion loss	Suitable for high performance application.		
4.5W Power handling	Supports a range of system power requirements.		
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.		

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Puchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

# **Low Pass Filter**

 $50\Omega$ DC to 800 MHz

# **VLFG-800+**



Generic photo used for illustration purposes only CASE STYLE: FF704

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


#### **Features**

- · Low loss, 1.6dB typ.
- High rejection 47dB
- · Excellent power handling, 4.5W
- Temperature stable
- Connectorized package
- Rugged unibody construction

#### **Applications**

- · Military radio applications
- Test and measurement
- · Telecommunications and broadband wireless applications
- Harmonic rejection
- VHF/UHF transmitters/receivers

#### **Functional Schematic**



## Electrical Specifications at 25°C

Pa	rameter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Insertion Loss	DC-F1	DC - 800	_	1.6	2.1	dB
Pass Band	Freq. Cut-Off	F2*	900	_	3.0	_	dB
	Return Loss	DC-F1	DC - 800	_	17	_	dB
		F3-F4	1150 - 1400	20	38	_	dB
Stop Band	Rejection Loss	F4-F5	1400 - 4500	36	47	_	dB
		F5-F6	4500 - 10000	_	24	_	dB


In Application where DC voltage is present at either input or output port, DC blocks are required.

<sup>\*</sup> Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

Maximum Ratings		
Operating Temperature	-55°C to 125°C	
Storage Temperature	-55°C to 125°C	
RF Power Input*	4.5W max.@25°C	


\*Passband rating, derate linearly to 0.75W at 125°C ambient Permanent damage may occur if any of these limits are exceeded.


## **Typical Frequency Response**




### Typical Performance Data at 25°C

	produit orioninanco Bata at i	
Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.12	37.70
100	0.21	35.00
200	0.31	37.21
300	0.40	35.06
500	0.63	30.62
700	1.05	28.36
800	1.56	23.28
900	3.33	12.72
975	10.60	3.81
1025	20.42	2.11
1065	29.93	1.63
1150	47.94	1.18
1400	54.20	0.70
2000	51.41	0.41
3000	54.42	0.36
4500	70.49	0.35
6000	43.98	0.41
8000	32.29	1.00
9000	28.20	0.64
10000	26.03	0.91





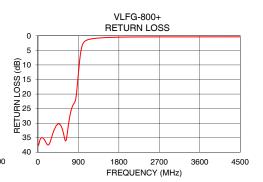

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.


C. The parts covered by this specification document are subject to Mini-Circuits standard limited to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

**VLFG-800+ Low Pass Filter** 

#### **Coaxial Connections**

PORT - 1	SMA-Male	
PORT - 2	SMA-Female	

### **Outline Drawing**

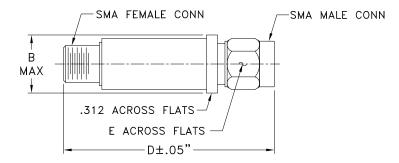

### Outline Dimensions (inch )

wt	Ε	D	В
grams	.312	1.43	.410
10	7 92	36.32	10 41

Note: Please refer to case style drawing for details

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Firms"); Puchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

