

DC Pass, High Power

# Power Splitter/Combiner ZC2PD-V654+

2 Way-0° 50Ω 6000 to 50000 MHz

## The Big Deal

- Super wideband, 6 to 50 GHz
- Low insertion loss, 0.9 dB typ.
- High Isolation, 27 dB typ.
- 16W power handling
- Low amplitude unbalance, 0.1 dB typ.



CASE STYLE: UU2624-3

## Product Overview

Mini-Circuits' ZC2PD-V654+ is a super wideband 2-way 0° splitter/combiner providing coverage from 6 to 50 GHz, supporting a wide range of applications including 5G, Ku, Ka, V and K-Band, instrumentation and many more. This model provides 16W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC2PD-V654+ comes housed in a case measuring 1.15 x 1.06 x 0.5".

## Key Features

Feature	Advantages
Ultra-wideband, 6 to 50 GHz	Extremely wide frequency range supports many broadband applications in a single model. Ideal for use in wideband instrumentation
Low insertion loss, 0.9 dB typ. at 32 GHz	The combination of 16W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 27 dB typ. at 32 GHz	Minimizes interference between ports.
High power handling: <ul style="list-style-type: none"><li>• 16W as a splitter at 25°C</li><li>• 0.86W as a combiner</li></ul>	The ZC2PD-V654+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.1 dB at 12 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 368mA	Supports applications where DC power is needed to pass through the RF line.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# DC Pass, High Power Power Splitter/Combiner

## ZC2PD-V654+

2 Way-0° 50Ω 6000 to 50000 MHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	16W* max.
Internal Dissipation	0.86W max.
DC Current	368mA


Permanent damage may occur if any of these limits are exceeded.

\* Derate linearly to 6.8W at 100°C

### Coaxial Connections

Sum Port	S
Port 1	1
Port 2	2


### Outline Drawing

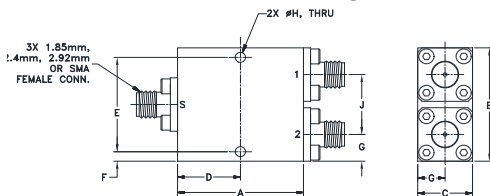

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G		
1.15	1.06	.50	.575	.883	.089	.25		
29.21	26.92	12.70	14.61	22.43	2.26	6.35		
H	J						wt	
.094	.56						grams	
2.4	14.22						40	

### Electrical Schematic



### Features

- Super wideband, 6000 - 50000 MHz
- Low insertion loss, 0.9 dB typ.
- Low amplitude unbalance, 0.06 dB typ.
- Excellent VSWR, 1.16:1 typ.
- High isolation, 27 dB typ.

### Applications

- 5G
- Fixed satellite
- Space research
- Mobile



Generic photo used for illustration purposes only

CASE STYLE: UU2624-3

Connectors	Model
2.4mm-Fem	ZC2PD-V654+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C




Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		6000		50000	MHz
Insertion Loss Above 3.0 dB	6000-18000		0.5	1	
	18000-40000		0.9	1.6	dB
	40000-50000		1.3	1.8	
Isolation	6000-18000	16	25		
	18000-40000	16	27		dB
	40000-50000	16	27		
Phase Unbalance (±)¹	6000-18000		0.4	3	
	18000-40000		0.8	5	Degree
	40000-50000		1.3	6	
Amplitude Unbalance (±)¹	6000-18000		0.04	0.3	
	18000-40000		0.06	0.4	dB
	40000-50000		0.11	0.5	
VSWR (Port S)	6000-18000		1.10	1.5	
	18000-40000		1.16	1.6	:1
	40000-50000		1.14	1.7	
VSWR (Port 1-2)	6000-18000		1.16	1.5	
	18000-40000		1.16	1.6	:1
	40000-50000		1.14	1.7	

1. With reference to average.

### Typical Performance Data

Frequency (MHz)	Total Loss¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
6000	3.23	3.28	0.05	18.78	0.04	1.06	1.21	1.23
8000	3.34	3.36	0.03	21.43	0.00	1.00	1.23	1.21
10000	3.39	3.43	0.04	26.25	0.20	1.09	1.18	1.20
12000	3.44	3.49	0.05	29.76	0.10	1.21	1.27	1.30
14000	3.48	3.51	0.03	26.21	0.05	1.12	1.20	1.22
18000	3.62	3.64	0.02	23.66	0.37	1.12	1.27	1.26
20000	3.55	3.59	0.04	23.33	0.28	1.13	1.12	1.15
24000	3.74	3.76	0.03	31.53	0.56	1.12	1.14	1.18
28000	3.80	3.82	0.02	24.24	0.33	1.06	1.20	1.22
32000	3.85	3.91	0.06	27.77	0.59	1.06	1.11	1.18
36000	3.98	3.98	0.01	29.38	0.43	1.06	1.07	1.03
40000	4.10	4.11	0.02	32.65	0.55	1.13	1.05	1.11
44000	4.28	4.30	0.01	29.12	0.60	1.20	1.15	1.17
48000	4.39	4.34	0.05	23.83	0.05	1.05	1.14	1.19
50000	4.54	4.36	0.17	28.01	0.39	1.05	1.09	1.02

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

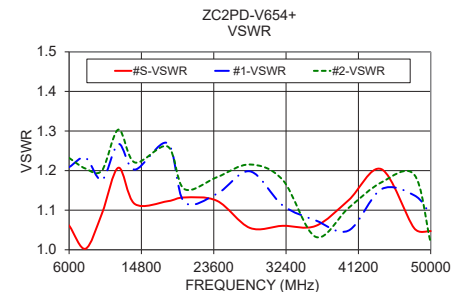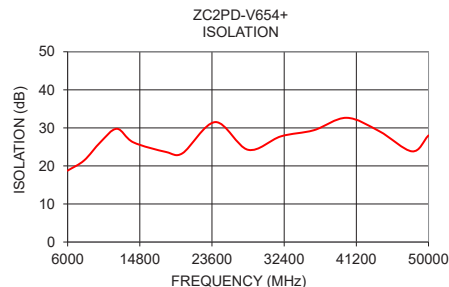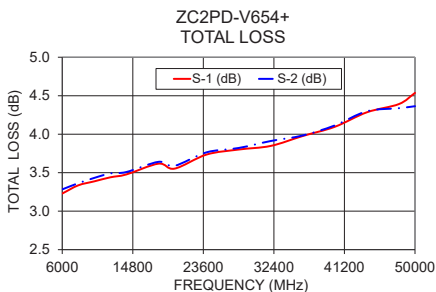

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
ECO-005253  
ZC2PD-V654+  
GY/CP/AM  
210315  
Page 2 of 2