

DC Pass, High Power

Power Splitter/Combiner

ZC3PD-K1844+

3 Way-0° 50Ω 18 to 40 GHz

The Big Deal

- Super wideband, 18 to 40 GHz
- Low insertion loss, 1.2 dB typ.
- High Isolation, 31 dB typ.
- 13.6W power handling
- Low amplitude unbalance, 0.15 dB typ.



CASE STYLE: UU2412-2

Product Overview

Mini-Circuits' ZC3PD-K1844+ is a super wideband 3-way 0° splitter/combiner providing coverage from 18 to 40 GHz, supporting a wide range of applications including K-Band, instrumentation and many more. This model provides 13.6W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC3PD-K1844+ comes housed in a case measuring 1.5 x 1.7 x 0.5" with super SMA connectors.

Key Features

Feature	Advantages
Ultra-wideband, 18 to 40 GHz	Extremely wide frequency range supports many broadband applications in a single model.
Low insertion loss, 1.2 dB typ. at 22 GHz	The combination of 13.6W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 31 dB typ. at 22 GHz	Minimizes interference between ports.
Low amplitude unbalance, 0.15 dB at 22 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 330mA	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

ZC3PD-K1844+

3 Way-0° 50Ω 18 to 40 GHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)*	13.6W* max.
Internal Dissipation	0.11W max.


DC Current 330 mA

Permanent damage may occur if any of these limits are exceeded.
* Derate linearly to 5.4W at 100°C

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3


Outline Drawing

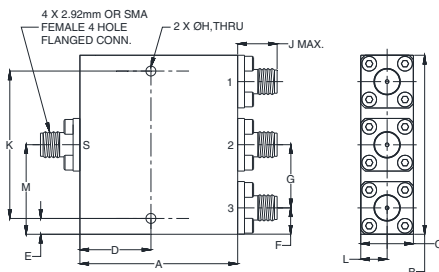

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.50	1.70	.50	.67	.150	.25	.60
38.10	43.18	12.70	17.02	3.81	6.35	15.2
H	J	K	L	M		wt
0.094	.43	1.400	.25	0.85		grams
2.4	11	35.56	6.35	21.59		80

Electrical Schematic



Features

- Wideband, 18000 to 40000 MHz
- Low insertion loss, 1.2 dB typ.
- Low amplitude unbalance, 0.15 dB typ.
- Excellent VSWR, 1.16 dB typ.
- High Isolation, 31 dB typ.

Applications

- Fixed Satellite
- K-band
- Mobile
- Space research
- Test Accessory

Electrical Specifications at 25°C




Parameter	Frequency (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		18		40	GHz
Insertion Loss Above 4.8 dB	18 - 26.5	—	0.8	1.4	dB
	26.5 - 40	—	1.2	1.8	
Isolation	18 - 26.5	18	33	—	dB
	26.5 - 40	18	31	—	
Phase Unbalance (±)°	18 - 26.5		4.7	8	Degree
	26.5 - 40		3.7	8	
Amplitude Unbalance (±)°	18 - 26.5		0.1	0.5	dB
	26.5 - 40		0.15	0.7	
VSWR (Port S)	18 - 26.5		1.11	1.6	:1
	26.5 - 40		1.16	1.7	
VSWR (Port 1-3)	18 - 26.5		1.16	1.6	:1
	26.5 - 40		1.16	1.7	

1. With reference to average

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
18000	5.41	5.55	5.46	0.15	30.55	29.94	33.80	4.34	1.13	1.13	1.19	1.13
19000	5.46	5.58	5.51	0.12	26.65	33.05	27.93	4.21	1.07	1.13	1.17	1.14
20000	5.39	5.50	5.43	0.11	27.95	33.41	29.71	4.60	1.09	1.08	1.09	1.04
22000	5.48	5.68	5.59	0.20	33.92	42.62	36.10	5.92	1.14	1.09	1.25	1.13
24000	5.58	5.74	5.59	0.17	31.84	34.49	31.66	5.27	1.06	1.18	1.15	1.10
26000	5.60	5.74	5.61	0.15	33.72	33.02	33.81	4.71	1.04	1.12	1.15	1.14
26500	5.63	5.74	5.72	0.11	30.59	39.65	33.10	4.35	1.07	1.15	1.12	1.11
28000	5.61	5.85	5.74	0.24	29.71	33.75	30.86	3.80	1.16	1.17	1.12	1.10
30000	5.77	5.91	5.74	0.17	32.19	26.04	29.20	4.25	1.10	1.08	1.11	1.11
32000	5.77	5.94	5.90	0.17	42.06	30.60	36.84	3.66	1.15	1.23	1.26	1.18
34000	5.86	5.98	5.91	0.13	31.42	42.87	35.84	2.69	1.06	1.16	1.08	1.11
35000	6.08	6.16	5.97	0.20	21.59	23.85	22.42	2.15	1.16	1.23	1.09	1.14
37500	6.14	6.22	6.03	0.19	37.80	29.95	36.16	1.73	1.25	1.13	1.11	1.11
40000	6.13	6.26	6.10	0.16	29.09	38.56	29.84	3.18	1.11	1.15	1.13	1.09

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

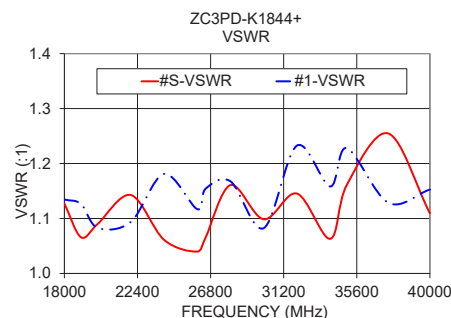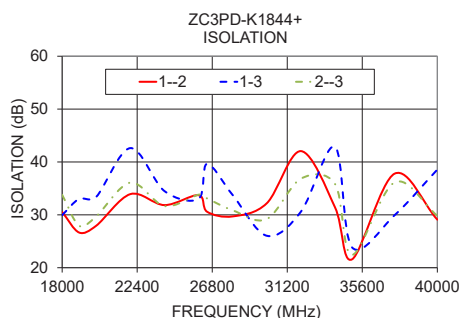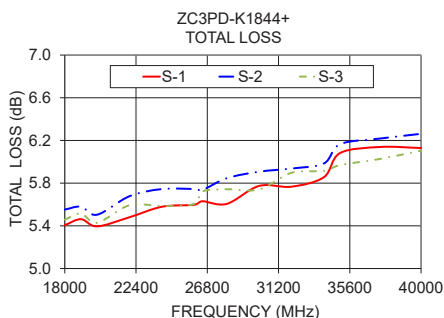

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Generic photo used for illustration purposes only

CASE STYLE: UU2412-2

Connectors	Model
2.92mm-Female	ZC3PD-K1844+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications