

4 Way-0° 50Ω 26000 to 50000 MHz

The Big Deal

- Super wideband, 26 to 50 GHz
- Low insertion loss, 1.6 dB typ.
- High Isolation, 30 dB typ.
- 16W power handling
- Low amplitude unbalance, 0.1 dB typ.



CASE STYLE: UU2413-5

Product Overview

Mini-Circuits' ZC4PD-V2654+ is a super wideband 4-way 0° splitter/combiner providing coverage from 26 to 50 GHz, supporting a wide range of applications including 5G, Ka, V and K-Band, instrumentation and many more. This model provides 16W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC4PD-V2654+ comes housed in a case measuring 2.04 x 1 x 0.5".

Key Features

Feature	Advantages
Ultra-wideband, 26 to 50 GHz	Extremely wide frequency range supports many broadband applications in a single model.
Low insertion loss, 1.6 dB typ. at 35 GHz	The combination of 16W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 30 dB typ. at 35 GHz	Minimizes interference between ports.
High power handling: • 16W as a splitter at 25°C • 1.3W as a combiner	The ZC4PD-V2654+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.1 dB typ.	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 374mA	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



DC Pass, High Power

4 Way-0° 50Ω 26000 to 50000 MHz

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	16W* max.
Internal Dissipation	1.3W max.
DC Pass	374mA

Coaxial Connections

Sum Port	S
Port 1	1
Port 2	2
Port 3	3
Port 4	4

5X 1.85mm, 2.4mm, 2.92mm OR SMA-FEMALE CONN.

1.854 [47.10]

.091 [2.30]

.500 [12.70]

1.00 [25.40]

.43 [11.0] MAX.

1

2

3

4

3 PLCS .51 [13.00]

.25 [6.35]

.25 [6.35]

.50 [12.70]

2.04 [51.70]

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$




- Super wideband, 26000 to 50000 MHz
- Low insertion loss, 1.6 dB typ.
- Low amplitude unbalance, 0.1 dB typ.
- Excellent VSWR, 1.13:1 typ.
- High isolation, 30 dB typ.

- 5G
- Fixed satellite
- Space research
- Mobile

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		26000		50000	MHz
Insertion Loss Above 6.0 dB	26000-40000		1.6	2.3	dB
	40000-50000		2.2	2.6	
Isolation	26000-40000	16	30		dB
	40000-50000	16	32		
Phase Unbalance	26000-40000		±2.5	±6	Degree
	40000-50000		±3.4	±8	
Amplitude Unbalance	26000-40000		±0.1	±0.4	dB
	40000-50000		±0.2	±0.5	
VSWR (Port S)	26000-40000		1.13	1.6	:1
	40000-50000		1.11	1.7	
VSWR (Port 1-4)	26000-40000		1.13	1.6	:1
	40000-50000		1.12	1.7	

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unb. (dB)	Isolation (dB)			Phase Unb. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	1-4	3-4						
26000	7.24	7.24	7.25	7.39	0.15	26.25	30.30	27.45	0.65	1.09	1.38	1.32	1.40	1.37
27000	7.26	7.28	7.28	7.41	0.16	32.97	31.18	29.79	0.93	1.20	1.20	1.21	1.23	1.13
28000	7.27	7.30	7.29	7.42	0.15	24.65	32.65	23.89	0.46	1.09	1.10	1.06	1.09	1.07
30000	7.35	7.36	7.33	7.49	0.16	31.28	35.45	31.89	0.93	1.13	1.16	1.12	1.13	1.13
32000	7.42	7.46	7.44	7.57	0.16	30.77	33.15	31.03	0.73	1.11	1.07	1.09	1.10	1.08
34000	7.49	7.51	7.44	7.62	0.18	24.27	31.00	23.70	0.74	1.09	1.10	1.10	1.05	1.12
36000	7.61	7.62	7.64	7.79	0.18	34.01	30.49	34.14	1.29	1.21	1.19	1.15	1.16	1.10
38000	7.77	7.77	7.75	7.91	0.16	25.55	33.41	25.44	1.17	1.33	1.21	1.15	1.14	1.08
40000	7.76	7.76	7.72	7.86	0.14	32.55	34.15	36.32	1.46	1.12	1.20	1.13	1.18	1.08
42000	7.82	7.82	7.78	7.95	0.16	27.87	32.49	28.97	1.22	1.04	1.20	1.08	1.04	1.11
44000	7.96	7.92	7.91	8.08	0.17	37.06	33.23	49.77	1.41	1.18	1.32	1.21	1.15	1.17
46000	8.10	8.06	8.07	8.23	0.17	27.80	38.40	27.32	1.39	1.29	1.30	1.18	1.19	1.17
47000	8.07	8.03	8.03	8.18	0.15	27.89	40.68	27.64	1.82	1.19	1.15	1.14	1.20	1.10
48000	8.07	8.07	8.04	8.18	0.14	30.48	42.09	29.95	1.62	1.11	1.15	1.07	1.17	1.08
50000	8.17	8.17	8.14	8.29	0.14	28.82	34.96	27.28	1.94	1.14	1.07	1.07	1.08	1.04

1. Total Loss = Insertion Loss + 6dB splitter theoretical loss.

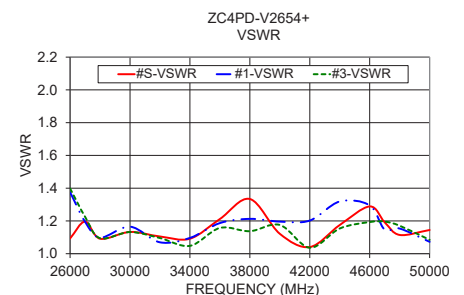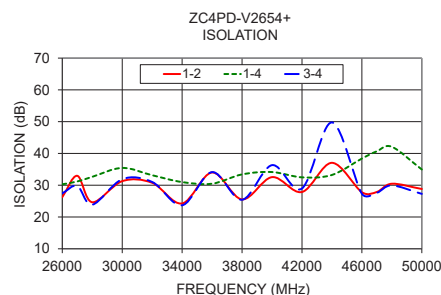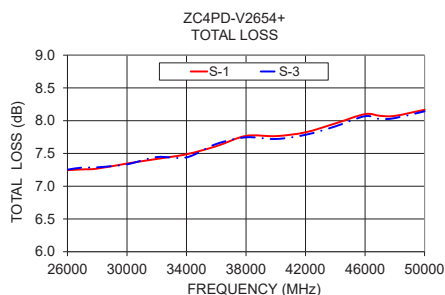

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms_iso



REV. OR
ECO-006621
ZC4PD-V2654+
GY/CP/AM
210201
Page 2 of 2



CASE STYLE: UU2413-5

Connectors	Model
2.4mm Fem	ZC4PD-V2654+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications