


Suspended Substrate Stripline Filters and Multiplexers

50Ω DC to 26 GHz

The Big Deal

- Low insertion loss
- Ultra-wide passband width
- Fast roll-off with wide stopband
- Good power handling and temperature stability
- Passband up to 26 GHz
- Stopband up to 26.5 GHz can extend to 40 GHz



Product Overview

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss by implementing printed circuit board suspended between two parallel ground planes, providing high Q. Low insertion loss combined with wide stopband makes them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultra-broadband receivers.

Low pass, high pass, band pass, band stop, diplexer and multiplexer designs can be realized with this technology. Advanced filter design and construction can achieve stopband width greater than 6x the center frequency, and temperature stability will be better than other printed circuit realizations because the fields are mainly in the air rather than in a dielectric. The inside walls of the housing hold the circuit and prevent movement that could be caused by vibration or mechanical shock, making these designs excellent candidates for harsh operating environments.

Suspended substrate stripline filters can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitters
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide, spur-free stop band results in better receiver sensitivity
High power handling	Well suited for transmitter applications
Excellent temperature stability	Ensures minimal variation in electrical performance across temperature

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Diplexer

ZDSS-7G10G-S+

50Ω DC to 20000 MHz (DC-7500, 10500-20000 MHz)



Generic photo used for illustration purposes only

CASE STYLE: UQ2920

Connectors Model
SMA-MF/F ZDSS-7G10G-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	3 W max. @ 25°C

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

Common Port - SMA-Male	1
Low Pass Port - SMA-Female	2
High Pass Port - SMA-Female	3

Features

- Low passband insertion loss of 1 dB typical upto 20 GHz in highpass channel.
- High rejection of 90 dB typical upto 20 GHz in lowpass channel.
- Good return loss of 12 dB typical in all the channels.

Applications

- Radar
- Test and measurement setup


Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC - 7500	-	0.8	2	dB
		High Pass	10500 - 20000	-	1.2	3	
	Return Loss	Low Pass	DC - 7500	-	12	-	dB
		High Pass	10500 - 20000	-	12	-	
Common		DC - 7500 10500 - 20000	-	12	-		
Stop Band Isolation	Low Pass	10500 - 13000	30	45	-	dB	
		13000 - 18000	60	90	-		
	High Pass	18000 - 20000	-	90	-	dB	
		DC - 7500 7500 - 8000	60	90	-		

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)		
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
10	0.01	84.08	40.01	41.59	0.00
4000	0.19	93.67	19.30	19.58	0.07
5000	0.19	94.42	39.75	38.83	0.10
5000	0.19	94.42	39.75	38.83	0.10
7500	0.47	89.32	21.25	22.24	0.20
8000	0.60	64.67	25.57	24.14	0.44
8650	3.08	36.34	5.26	4.85	2.37
9350	21.07	3.27	7.76	0.12	9.36
9650	30.92	1.48	24.15	0.07	38.00
10000	37.52	1.21	16.98	0.14	16.12
10500	48.52	0.92	18.42	0.13	18.16
13000	82.31	0.55	16.25	0.12	14.77
18000	90.41	0.38	20.17	0.11	21.29
19000	91.86	0.53	18.18	0.01	17.29
20000	97.55	0.37	26.77	0.02	27.39

Functional Schematic


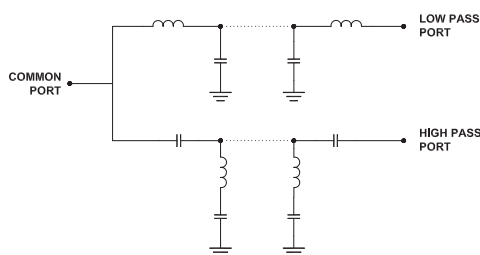


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.28	1.10	.60	.288	.38	.880	.11	1.11
32.5	27.9	15.2	7.31	9.8	22.35	2.8	28.2
J	K	L	M	N			Wt.
.100	.31	.74	.31	.36			grams
2.54	7.8	18.8	8.0	9.1			106

Note: Please refer to case style drawing for details







Outline Drawing

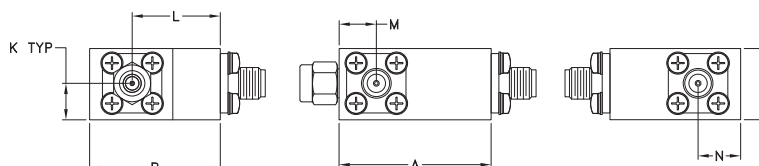

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MOLStore/terms.jsp



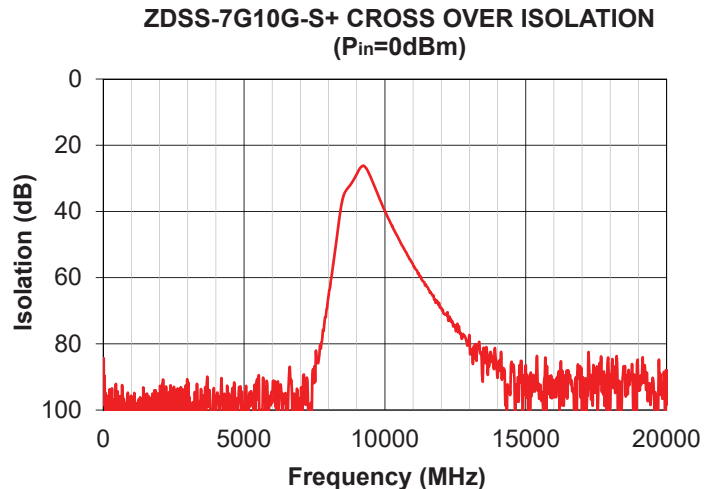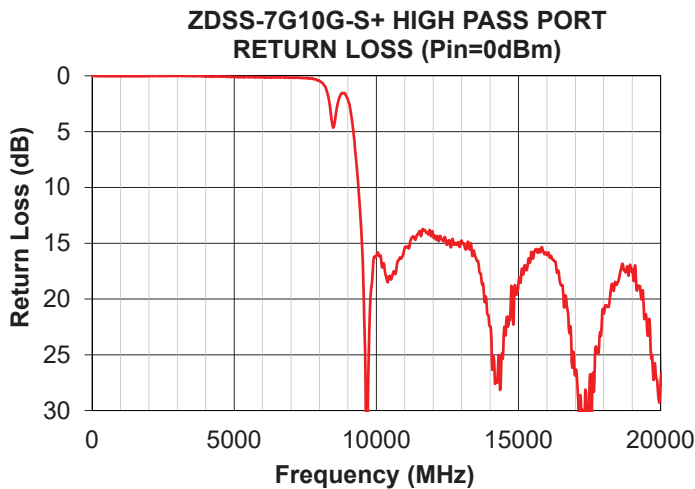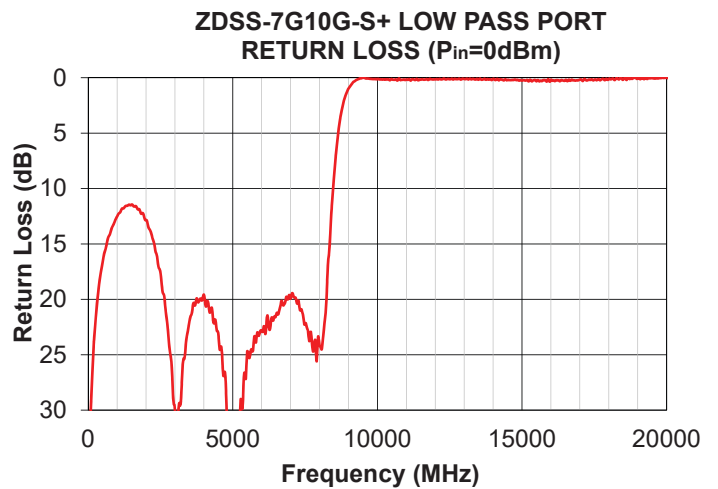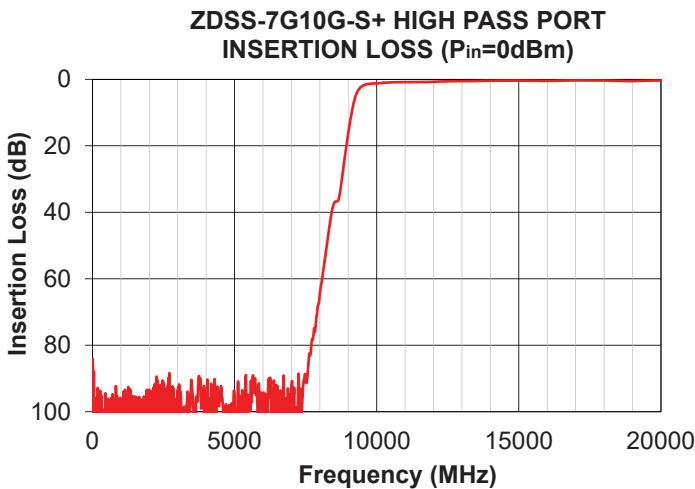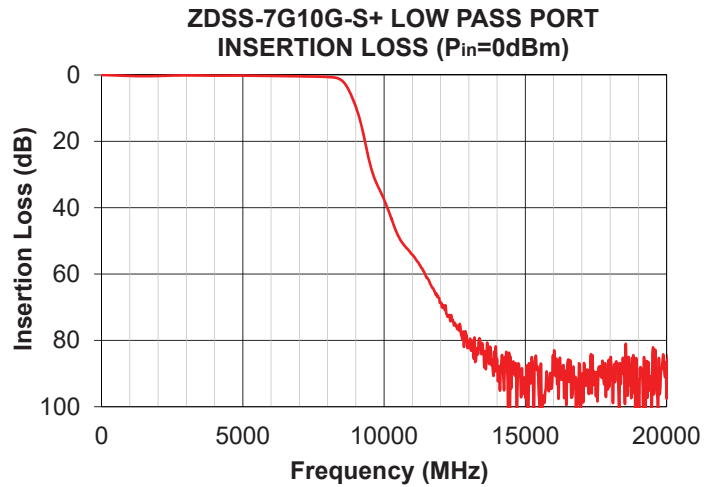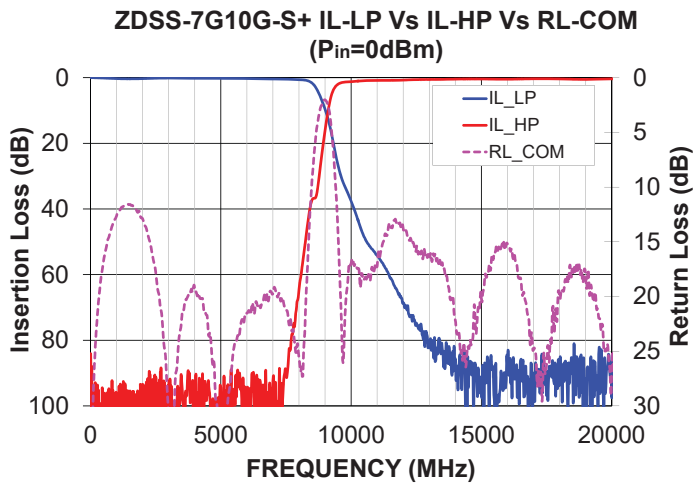

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

