

Coaxial Directional Coupler

50Ω

20 to 2000 MHz

ZFDC-20-50+



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Coaxial Connections

INPUT	3
OUTPUT	1
COUPLED	2

Features

- very wideband, 20 to 2000 MHz
- excellent directivity, 25 dB typ.
- excellent mainline loss, 0.7 dB typ.
- rugged shielded case

Applications

- cellular
- GPS
- instrumentation
- communication receivers & transmitters


CASE STYLE: K18

Connectors	Model	Price	Qty.
SMA	ZFDC-20-50-S+	\$64.95	(1-9)
BRACKET (OPTION "B")		\$2.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

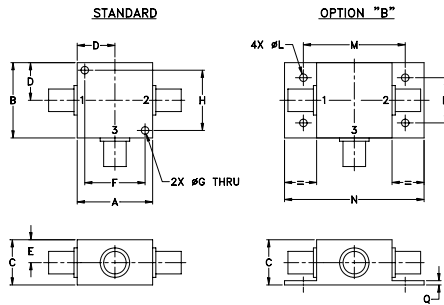

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

Directional Coupler Electrical Specifications

FREQ. RANGE (MHz)	COUPLING* (dB)		MAINLINE LOSS*						DIRECTIVITY						VSWR (:1)	POWER INPUT	
			L		M		U		L		M		U			MU	
	f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.		Min.	Typ.
20-2000	19.5±0.5	±0.8	0.8	1.3	0.7	1.3	1.0	1.6	30	20	25	20	22	10	1.25	1.0	1.0

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


1. Mainline loss includes theoretical power loss at coupled port.

* Above 1000 MHz, coupling flatness ± 1 dB


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
20.00	0.82	19.36	29.25	17.95	19.33	21.82
50.00	0.65	19.21	33.94	21.29	23.63	24.42
80.00	0.65	19.19	34.88	22.44	25.39	25.30
100.00	0.60	19.14	35.01	22.93	26.11	25.66
300.00	0.66	19.18	31.17	25.70	28.22	28.13
1000.00	0.86	19.37	23.02	24.12	32.91	28.50
1200.00	1.00	19.40	22.32	20.46	32.70	24.27
1400.00	1.09	19.40	21.99	17.71	30.28	21.55
1600.00	1.27	19.35	21.75	15.67	27.28	19.50
1800.00	1.34	19.36	21.00	14.04	24.37	17.79
2000.00	1.46	19.37	19.19	12.70	21.84	16.24


ZFDC-20-50+
MAINLINE LOSS

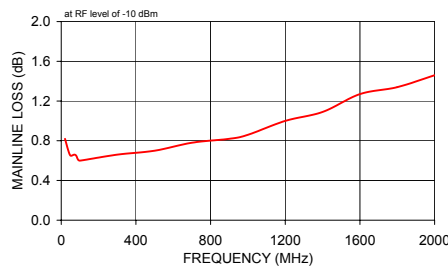


ZFDC-20-50+
COUPLING & DIRECTIVITY

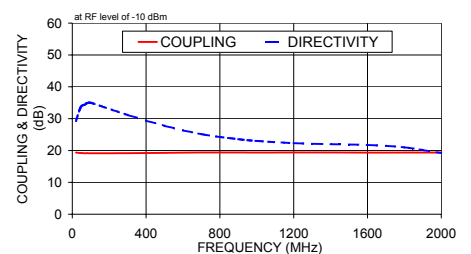

ZFDC-20-50+
RETURN LOSS

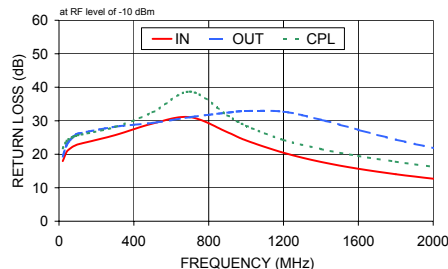

electrical schematic

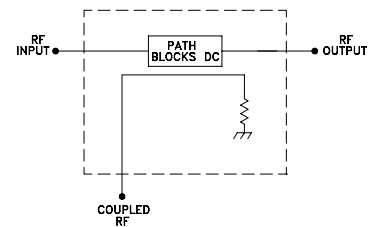

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M113397
ZFDC-20-50+
WZ/TD/CP/AM
070907