

Coaxial Low Noise Amplifier

ZFL-500HLN+ ZFL-500HLN

50Ω 10 to 500 MHz



Features

- low noise, 3.8 dB typ.
- high IP3, +30 dBm typ.

Applications

- VHF/UHF
- small signal amplifier
- communications system

CASE STYLE: Y460			
Connectors	Model	Price	Qty.
SMA	ZFL-500HLN(+)	\$99.95	(1-9)
BRACKET (OPTION "B")		\$2.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Noise Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		NOISE FIGURE (dB)	GAIN (dB)		MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (:1) Typ.		DC POWER		
	f _L	f _U		Flatness Max.	Total Range	Output (1 dB Compr.)	Input (no damage)		IP3 Typ.	In	Out	Volt (V) Nom.	Current (mA) Max.
ZFL-500HLN(+)	10	500	3.8	19	±0.4	+16	+15	+30	2.0	2.0	15	110	

m = mid range [2 f_L to f_U/2]

Open load is not recommended, potentially can cause damage.
With no load derate max input power by 20 dB


Maximum Ratings

Operating Temperature -20°C to 71°C

Storage Temperature -55°C to 100°C

DC Voltage +17V Max.

Outline Drawing

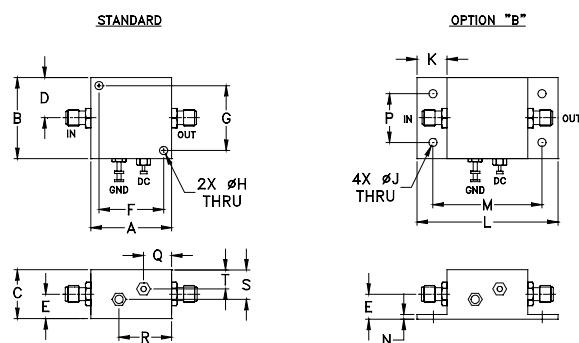

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.25	1.25	.75	.63	.36	1.000	1.000	.125	.125	.46	2.18	1.688	.06	.750	.50	.80	.45	.29	grams
31.75	31.75	19.05	16.00	9.14	25.40	25.40	3.18	3.18	11.68	55.37	42.88	1.52	19.05	12.70	20.32	11.43	7.37	38



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site








The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Typical Performance Data/Curves

ZFL-500HLN+ ZFL-500HLN

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	12V	15V	16V	12V	15V	16V	IN	OUT		
10.00	20.50	20.97	21.05	16.70	16.20	16.30	1.24	1.17	3.83	16.78
19.30	20.37	20.82	20.92	17.10	17.00	16.00	1.12	1.13	3.84	17.09
46.50	20.21	20.68	20.76	17.50	15.30	15.90	1.05	1.11	3.83	17.14
111.80	20.31	20.78	20.87	16.20	15.20	16.50	1.02	1.11	3.89	17.19
198.50	20.22	20.66	20.77	15.60	16.20	15.30	1.02	1.06	3.88	17.17
248.70	20.35	20.82	20.90	15.80	15.10	14.90	1.04	1.07	3.92	17.13
311.50	20.22	20.69	20.77	15.80	15.20	15.00	1.07	1.06	3.95	16.97
374.40	20.46	20.96	21.03	14.30	15.10	14.20	1.10	1.10	3.96	16.95
437.20	20.32	20.79	20.90	14.20	13.90	13.60	1.13	1.17	3.97	16.91
500.00	20.36	20.87	20.96	13.80	13.20	12.30	1.17	1.25	3.97	16.91

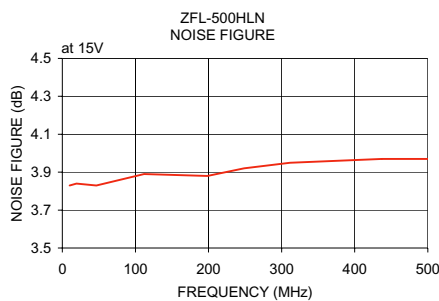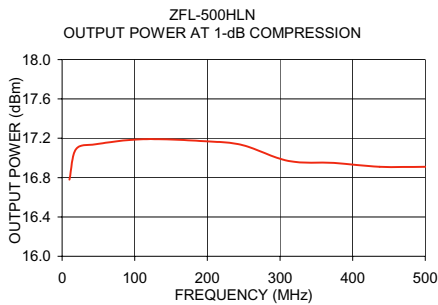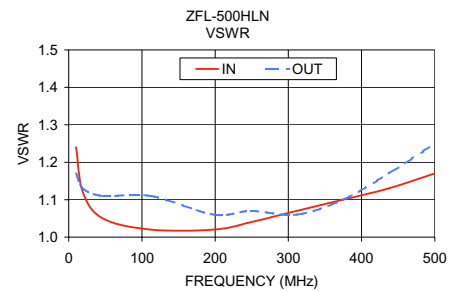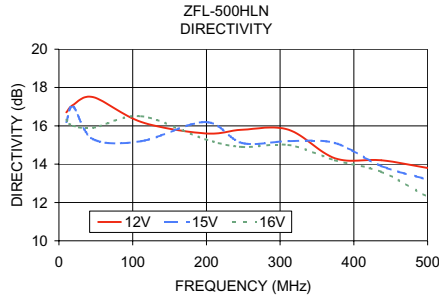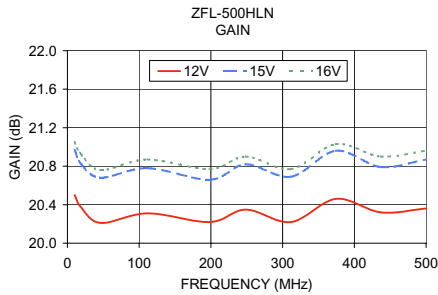

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS