

50Ω

9 to 11 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
LO/RF Power	50mW
I&Q Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

LO (carrier)	1
RF (signal)	3
I (0°)(ref.)	S
Q (90°)*	2

* Q= I+90° for LO<RF
Q= I-90° for LO>RF

Features

- rugged, shielded case
- excellent 3rd and 5th order harmonics suppression
- good phase and amplitude unbalance

Applications

- radar and communication systems



CASE STYLE: J17
Connectors Model
SMA ZFM1Q-10D
BRACKET (OPTION "B")

Demodulator Electrical Specifications


FREQUENCY (MHz)				CONVERSION LOSS (dB)			AMPLITUDE UNBALANCE (dB)		PHASE UNBALANCE (Deg.) with reference to 90°		HARMONIC SUPPRESSION (dBc)				
RF (SIGNAL)		LO (CARRIER)		I&Q								3XI/Q		5XI/Q	
f _L	f _U	Min.	Max.	$\overline{x}$	σ	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.
9	11	DC	2	6.0	0.10	7.0	0.15	0.3	1.0	3.0	50	35	65	55	

Notes:
1. Operating LO Power: 10±0.5 dBm
2. 1 dB Compression at +4 dBm RF input
3. DC offset 1mV typ.
4. Conversion Loss=RF power, dBm - (I+Q) power, dBm

Typical Performance Data



Frequency (MHz)		Conversion Loss (dB)	Amplitude Unbalance (dB)	Phase (I&Q) (deg.)	Frequency (MHz)		DC Offset (mV)
LO=10MHz	RF				LO	RF	
10.30	0.30	5.85	0.08	90.78	9.00	9.10	0.48
10.59	0.59	5.82	0.02	90.69	9.16	9.26	0.42
10.87	0.87	5.80	0.03	90.63	9.32	9.42	0.48
10.96	0.96	5.80	0.02	90.64	9.37	9.47	0.48
11.15	1.15	5.83	0.02	90.75	9.47	9.57	0.38
11.44	1.44	5.78	0.04	90.66	9.63	9.73	0.48
11.63	1.63	5.77	0.04	90.68	9.74	9.84	0.46
11.72	1.72	5.77	0.04	90.67	9.79	9.89	0.38
12.01	2.01	5.75	0.04	90.68	9.95	10.05	0.47
12.29	2.29	5.73	0.00	90.61	10.00	10.10	0.46
12.39	2.39	5.73	0.07	90.55	10.16	10.26	0.47
12.58	2.58	5.72	0.02	90.62	10.21	10.31	0.40
12.86	2.86	5.71	0.04	90.40	10.32	10.42	0.45
13.05	3.05	5.70	0.04	90.55	10.47	10.57	0.39
13.15	3.15	5.69	0.04	90.62	10.58	10.68	0.46
13.43	3.43	5.67	0.00	90.57	10.63	10.73	0.40
13.72	3.72	5.63	0.02	90.56	10.79	10.89	0.46
13.81	3.81	5.62	0.04	90.59	10.90	11.00	0.36
13.91	3.91	5.61	0.04	90.47	10.95	11.05	0.38
14.00	4.00	5.61	0.05	90.60	11.00	11.10	0.39

Outline Drawing

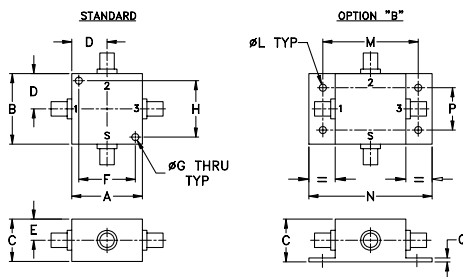


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.000	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	75.0

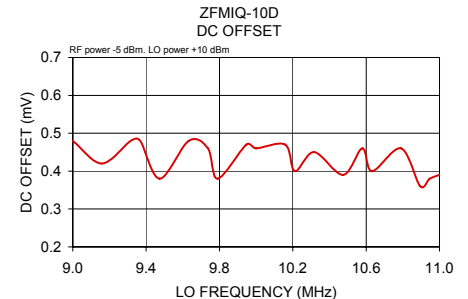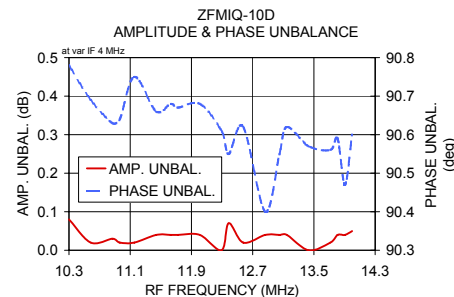

I&Q demodulation block diagram



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp