

Coaxial

Power Splitter/Combiner

ZFSCJ-2-1+
ZFSCJ-2-1

2 Way-180° 50Ω 1 to 500 MHz



Generic photo used for illustration purposes only

CASE STYLE: K18

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT(S)	3
PORT 1	1
PORT 2	2

Features

- wideband, 1 to 500 MHz
- high isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1 deg. typ.
- rugged shielded case

Applications


- VHF/UHF
- signal processing

Connectors	Model
BNC	ZFSCJ-2-1
SMA	ZFSCJ-2-1-S(+)
N-TYPE	ZFSCJ-2-1-N
BRACKET (OPTION "B")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

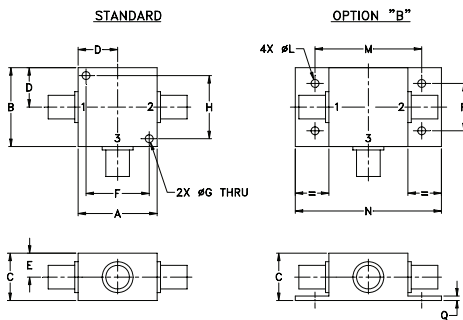

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

For bracket version, Option B dimension "C" changes from 0.75 to 0.94 inch when connectors are Type N.

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-500	30	20	33	25	30	18	1.0	1.5	1.0	1.5	1.0	1.5	2	4	7	0.5	0.2	0.5

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1.00	3.97	3.95	0.02	30.26	179.94	1.27	1.34	1.34
20.96	3.65	3.65	0.00	37.10	180.23	1.03	1.18	1.18
40.92	3.70	3.70	0.00	40.24	180.39	1.03	1.17	1.18
80.84	3.77	3.76	0.00	32.16	181.09	1.09	1.17	1.18
120.76	3.76	3.78	0.02	29.60	181.43	1.06	1.18	1.20
160.68	3.77	3.80	0.03	29.99	181.76	1.04	1.16	1.18
200.60	3.82	3.84	0.02	27.58	181.71	1.06	1.14	1.17
240.52	3.94	3.94	0.01	26.07	181.79	1.15	1.13	1.17
280.44	3.93	3.95	0.02	25.65	181.93	1.17	1.11	1.16
320.36	3.89	3.94	0.05	24.22	181.89	1.11	1.13	1.14
360.28	3.94	3.99	0.05	23.37	181.49	1.11	1.15	1.14
400.20	4.09	4.11	0.03	22.87	180.85	1.21	1.19	1.13
440.12	4.13	4.13	0.00	22.19	180.17	1.24	1.24	1.12
480.04	4.14	4.13	0.01	22.33	179.57	1.19	1.28	1.12
500.00	4.19	4.17	0.03	22.51	179.34	1.19	1.31	1.11

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

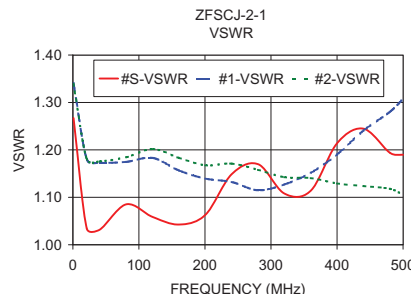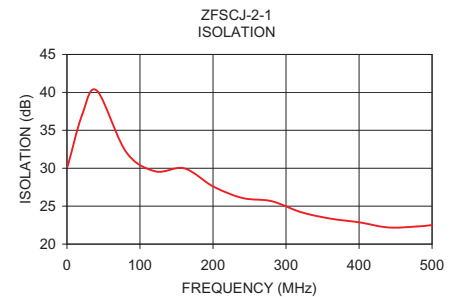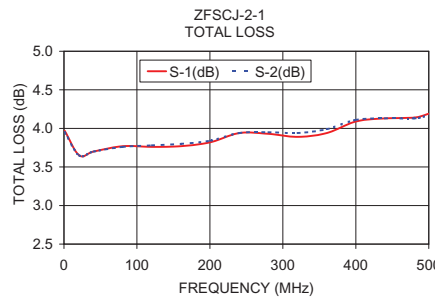

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

