



COAXIAL

Medium Power Amplifier

ZHL-10M1G01W0+
ZHL-10M1G01W0X+

50Ω 10 to 1000 MHz Broadband 1 W SMA Female

KEY FEATURES

- Broadband, 10 to 1000 MHz
- High Gain, 22 dB Typ.
- High P1dB, +31 dBm, Typ.
- High OIP3, +46 dBm Typ.



Generic photo used for illustration purposes only


APPLICATIONS

- Communication Systems
- R&D, Production, and Test Systems
- Test & Measurement Equipment
- General Laboratory Applications

PRODUCT OVERVIEW

Mini-Circuits' ZHL-10M1G01W0(X)+ is a medium power broadband amplifier providing more than 1 W of output power with a typical small signal gain of 22 dB over the 10 to 1000 MHz frequency band. The amplifier uses state-of-the-art semiconductor technology and can be used in a wide range of applications. A single supply voltage ensures ease of operation. The amplifier is made with a rugged aluminum housing and can be supplied with or without a heatsink.

FUNCTIONAL DIAGRAM

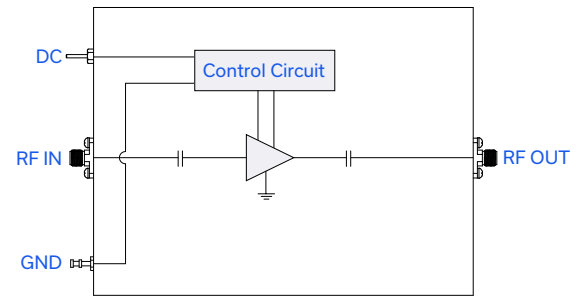

ELECTRICAL SPECIFICATIONS AT $T_{\text{MOUNTING BASE}} = +25\text{ }^{\circ}\text{C}$, $V_{\text{DC}} = +24\text{ V}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Frequency Range	f		10		1000	MHz
Small Signal Gain	G_{SS}	$P_{\text{OUT}} = -25\text{ dBm}$	16	22	24	dB
Small Signal Gain Flatness	$G_{\text{SS-FLAT}}$	$P_{\text{OUT}} = -25\text{ dBm}$		± 0.2	± 1.4	dB
Output Power at 1 dB Compression	$P_{1\text{dB}}$	$P_{\text{OUT-REF}} = +15\text{ dBm}$	+29	+31		dBm
Output Power at 3 dB Compression	$P_{3\text{dB}}$	$P_{\text{OUT-REF}} = +15\text{ dBm}$	+30	+32		dBm
Noise Figure	NF			9		dB
Output Third Order Intercept Point	OIP3	$P_{\text{OUT}} = +20\text{ dBm/ tone}$		+46		dBm
Input Return Loss	I-RL	$P_{\text{OUT}} = -25\text{ dBm}$	9.5	24		dB
Output Return Loss	O-RL	$P_{\text{OUT}} = -25\text{ dBm}$	9	16		dB
DC Supply Voltage	V_{DC}		+20	+24	+25	V
Supply Current	I_{DC}	Without fan at $P_{3\text{dB}}$ With fan at $P_{3\text{dB}}$		0.5 0.9	0.6 1.0	A











COAXIAL

Medium Power Amplifier

ZHL-10M1G01W0+
ZHL-10M1G01W0X+

50Ω 10 to 1000 MHz Broadband 1 W SMA Female

TYPICAL PERFORMANCE DATA AT $T_{MOUNTINGBASE} = +25\text{ }^{\circ}\text{C}$, $V_{DC} = +24\text{ V}$, 50Ω

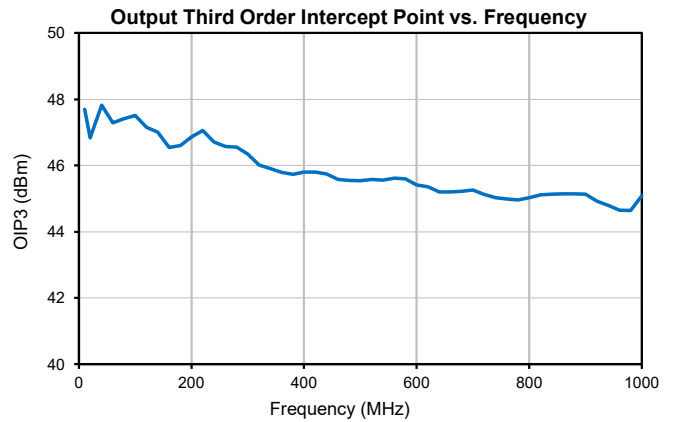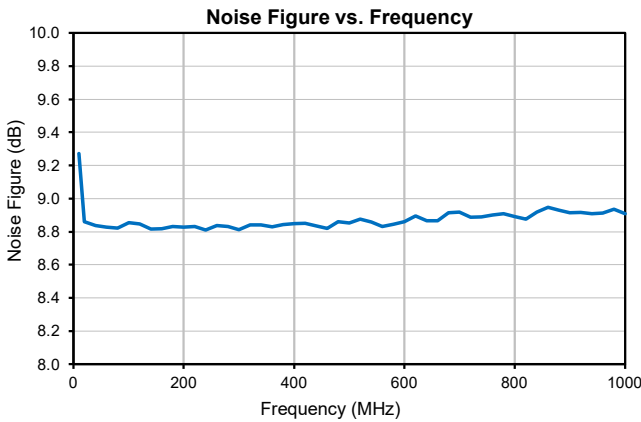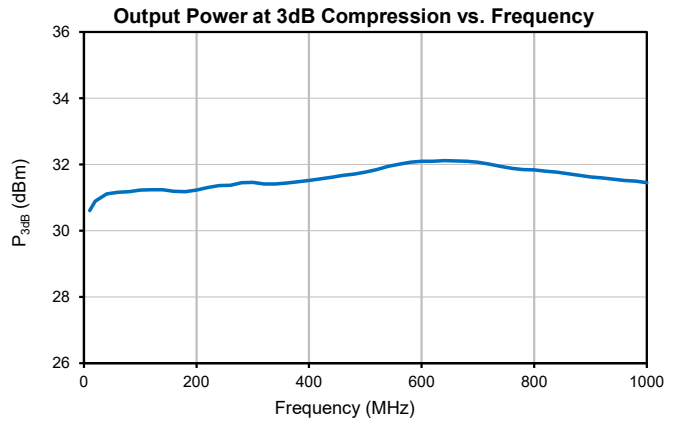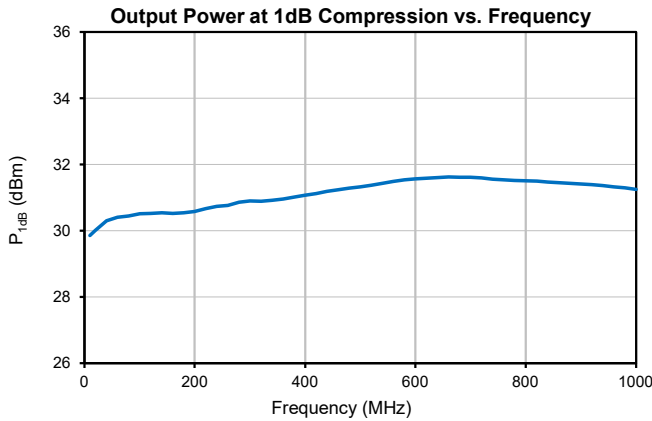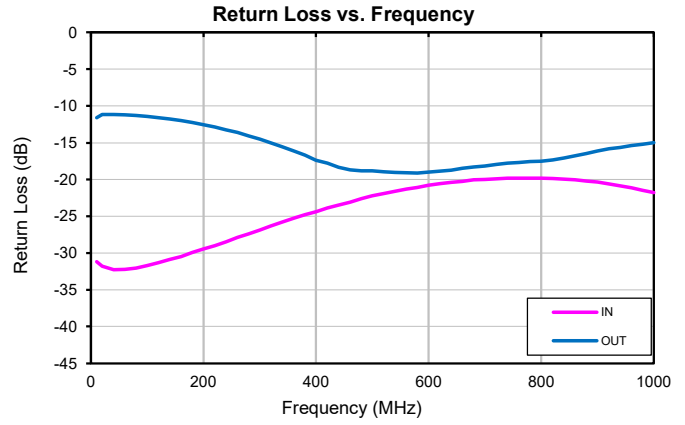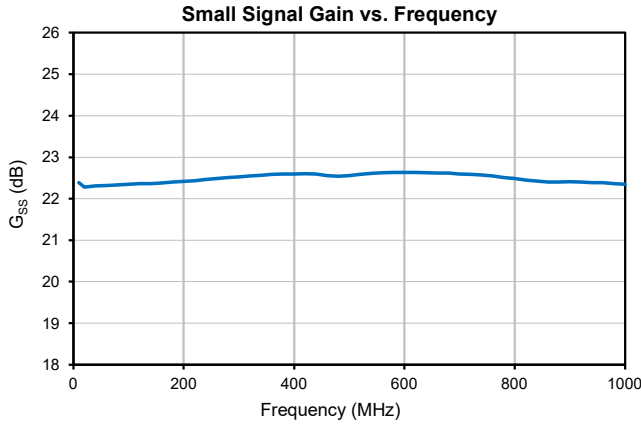



COAXIAL

Medium Power Amplifier

ZHL-10M1G01W0+
ZHL-10M1G01W0X+

50Ω 10 to 1000 MHz Broadband 1 W SMA Female

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings	
Operating Temperature	ZHL-10M1G01W0+	T _{AMBIENT} : -20 °C to +60 °C
	ZHL-10M1G01W0X+	T _{MOUNTING BASE} : -20 °C to +85 °C
Storage Temperature	-55 °C to +100 °C	
No damage with an open or short at P _{OUT} = +28 dBm CW		
RF Input Power (No Damage)	+15 dBm	
DC Operating Voltage	+25 V	
Total Power Dissipation (Without Fan at P3dB)	15 W	
Total Power Dissipation (With Fan at P3dB)	25 W	

Permanent damage may occur if any of these limits are exceeded.

DETERMINING MAXIMUM THERMAL RESISTANCE OF USERS' EXTERNAL HEAT SINK

$\text{MAXIMUM THERMAL RESISTANCE} = \frac{\text{MAXIMUM OPERATING CASE TEMP} - \text{MAXIMUM USER AMBIENT TEMP}}{\text{POWER DISSIPATION}}$
<p>Example:</p> <p>MAXIMUM MOUNTING BASE TEMP = +85 °C (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) MAXIMUM USER AMBIENT TEMP = +60 °C (USER DEFINED) POWER DISSIPATION = 12 WATTS (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) THEN MAXIMUM ALLOWABLE THERMAL RESISTANCE = 2.1 °C/W</p>





COAXIAL

Medium Power Amplifier

ZHL-10M1G01W0+
ZHL-10M1G01W0X+


Mini-Circuits

50Ω 10 to 1000 MHz Broadband 1 W SMA Female


COAXIAL CONNECTIONS

IN (RF-IN)	SMA female
OUT (RF-OUT)	SMA female

CASE STYLE DRAWING WITH HEATSINK (ZHL-10M1G01W0+)

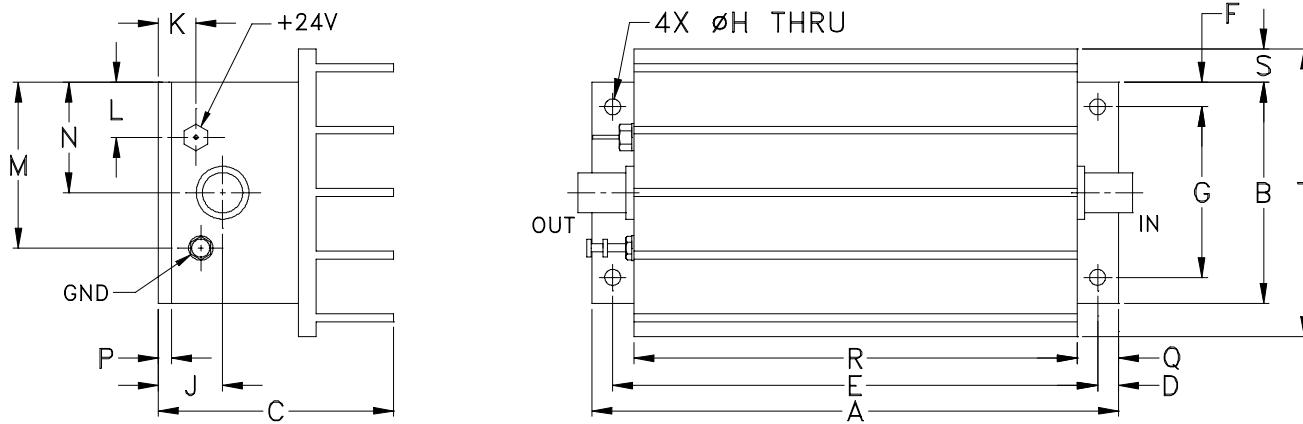

CASE STYLE DRAWING WITHOUT HEATSINK (ZHL-10M1G01W0X+)

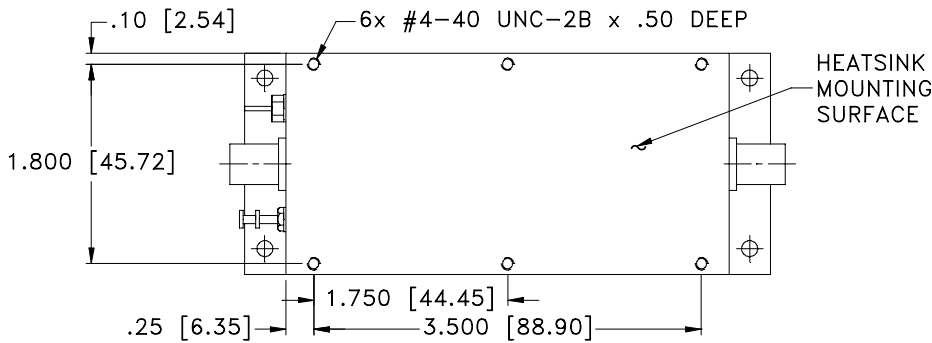

Weight: 440 grams Weight without heatsink: 325 grams Dimensions are in inches [mm].
Tolerances: 2 Pl.±03; 3 Pl. ±.015 Inch

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
4.75	2.00	2.12	.19	4.375	.23	1.540	.144	.58	.34	.50	1.50	1.00	.12	.38	4.00	.30	2.60	grams*
120.65	50.80	53.85	4.83	111.13	5.84	39.12	3.66	14.73	8.64	12.70	38.10	25.40	3.05	9.65	101.60	7.62	66.04	440.0

*325 grams without heatsink





COAXIAL

Medium Power Amplifier

ZHL-10M1G01W0+
ZHL-10M1G01W0X+

50Ω 10 to 1000 MHz Broadband 1 W SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD.

Performance Data & Graphs	Table
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
RoHS Status	Compliant
Environmental Ratings	ENV23T15

ORDERING INFORMATION

Model No. Links	ZHL-10M1G01W0+	ZHL-10M1G01W0X+
Option	With Heatsink	Without Heatsink
Case Style	T34	
Connector	IN (SMA female) / OUT (SMA female)	

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

